




URBAN LIGHTING



Product Families

Chameleon

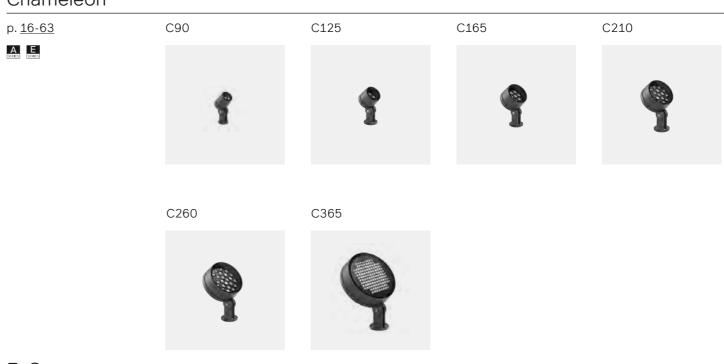

F-System

F-System M

p. <u>64-89</u>

A T SEED			
FO			
p. <u>90-103</u>	FO420	FO600	
A T			
$\Gamma \Lambda$			

F-System S

F-System XS

F-System M-W


FΑ

p. <u>104-125</u>





Products Families

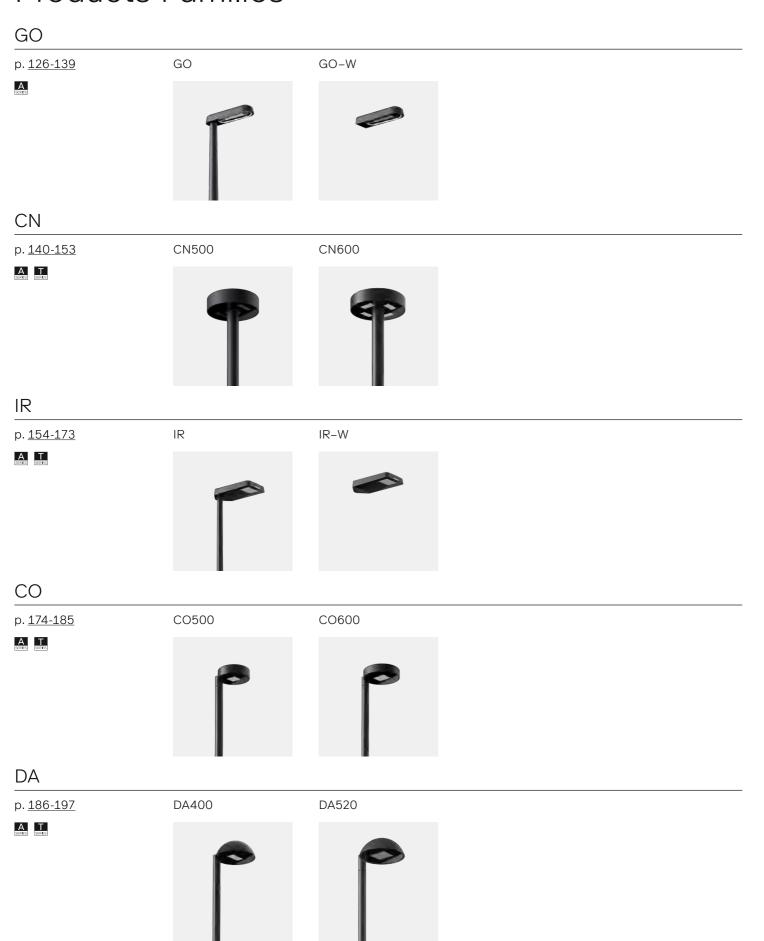





Products Families

RAZER

p. <u>278-279</u>

A

RAZER



ID

p. <u>280-285</u>







R-Series

p. <u>286-301</u> R50









R200



UP-Series

p. <u>302-315</u>









BD22





SB21





WR22





Poles


p. <u>316-319</u>





Products Categories

Projectors

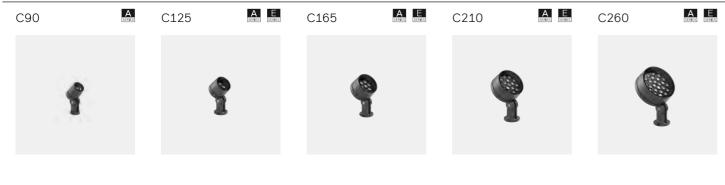




Wall/ceiling luminaires










Light columns



Bollards

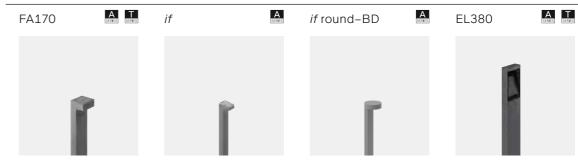



Products Categories

Linear systems





In-ground luminaires















Urban furniture











BD23








WR21






Pole





LARGE AREA LIGHTING

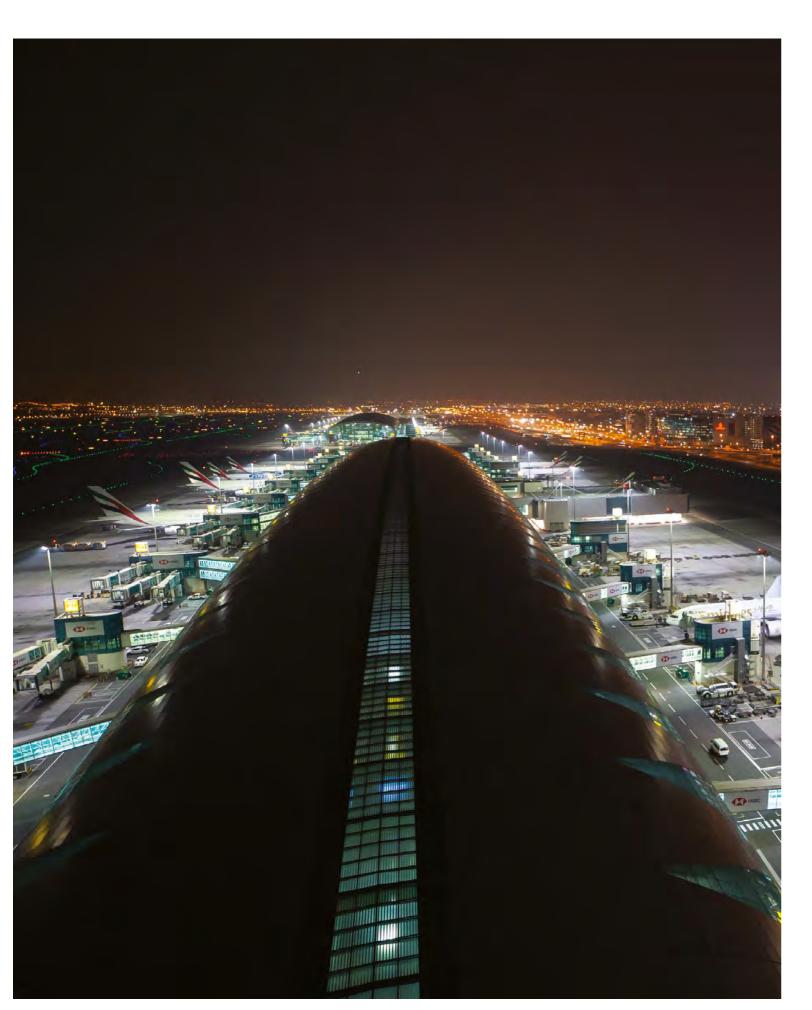

Products Families

R-System

p. 318-341

gen4 R2

gen4 R1

gen4 R1

gen4 R1

gen4 R2

gen4 R4

RIVAL


p. <u>342-347</u> RIVAL

Α





URBAN LIGHTING

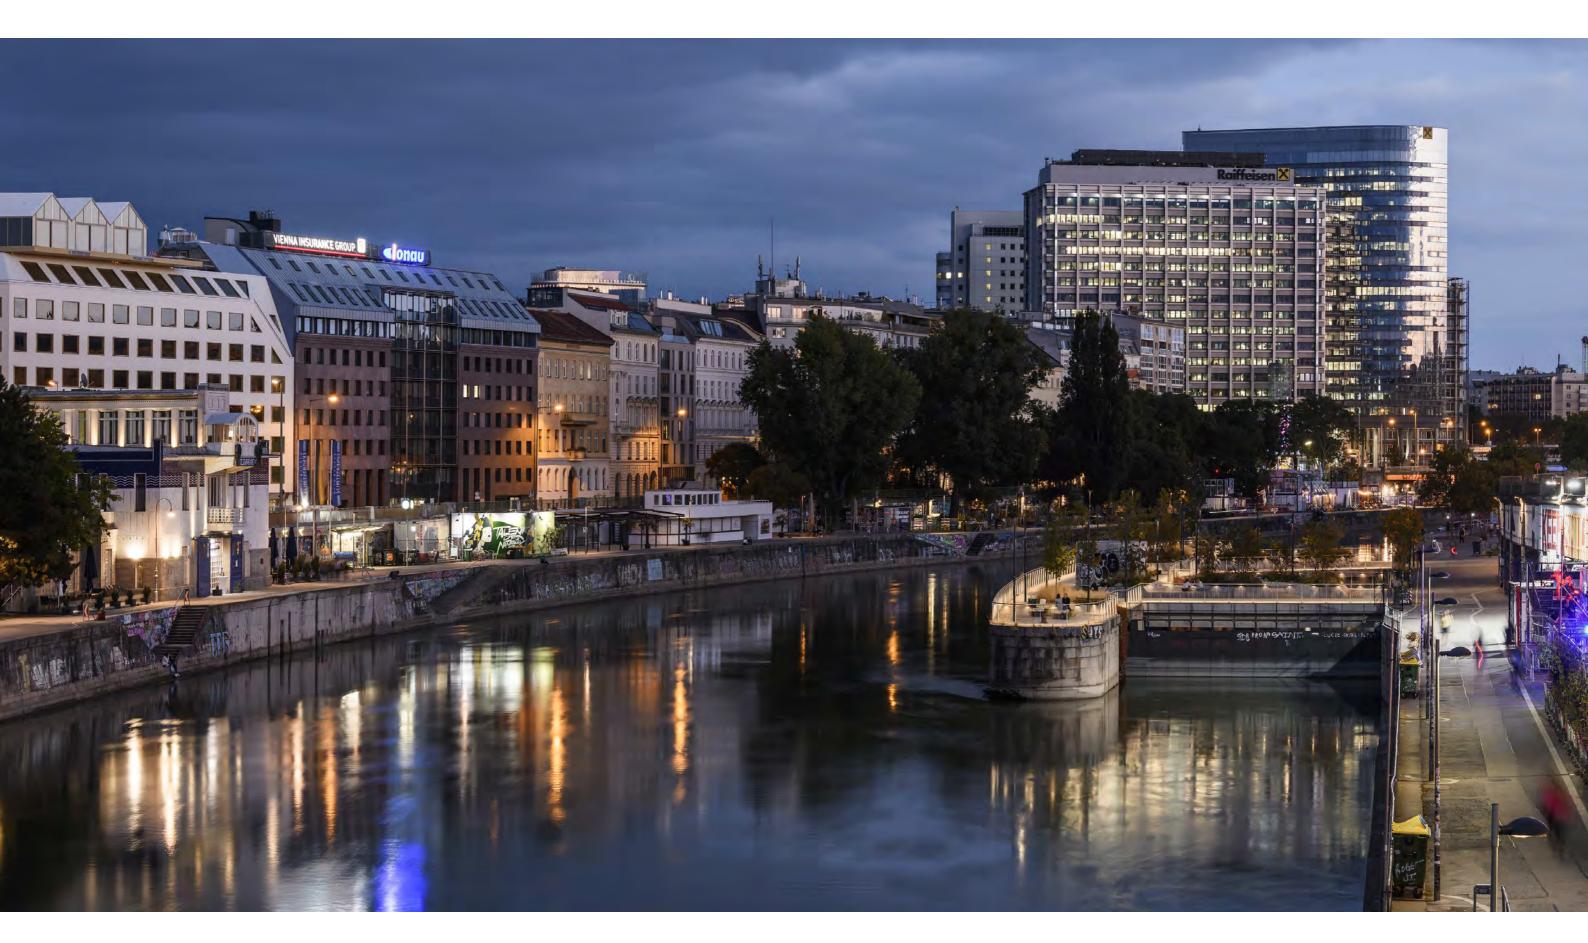

14 15













A master of transformation.

A projector.

A wall luminaire.

A pole luminaire.

Dynamic.

Intelligent.







reddot winner 2023



C165 – Integral, EG06 Symmetric Ultra Narrow 4°, 2,700 K Concentric Louvre ewoLightLayer, Reverse Cone



C165 - Slice, EG06 Symmetric Narrow 12°, Tunable White, Shadow Sail

 $\mbox{C210}$ – Slice, A–Series Asymmetric Forward and Extra Side Throw, 2,700 K, Shadow Sail



< C125 – Slice A–Series Asymmetric Forward and Extra Side Throw, 2,700 K, Half Cone

C260 - Slice EG06 Symmetric Extra Narrow 6°, 2,700 K , Full Snoot




C165 - Slice EGM01 Symmetric Narrow 12°, RGBW










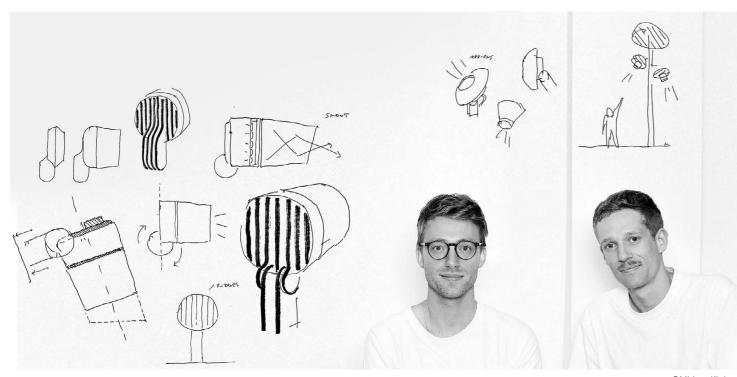

PRODUCTDESIGN by GECKELER MICHELS, Berlin

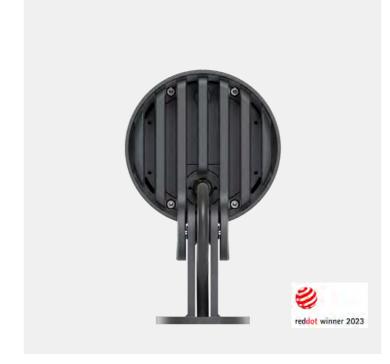

Function

Thermally optimised heatsink and cooling ring creating a chimney effect to keep electronic components cool.

Modularity

Discrete fixing mechanism for external ewoLightLayers and transformative accessories.

Form

Elegant luminaire design with clean lines, soft curves and concealed screws.















A dual function

Chameleon is designed to be active from sunset to sunset. During the day, its optional accessories such as a shadow sail offer new types of functionalities.





A diverse habitat Chameleon is a common creature across all areas of the urban jungle.




















©Alexander Fthenakis





©Alexander Fthenakis

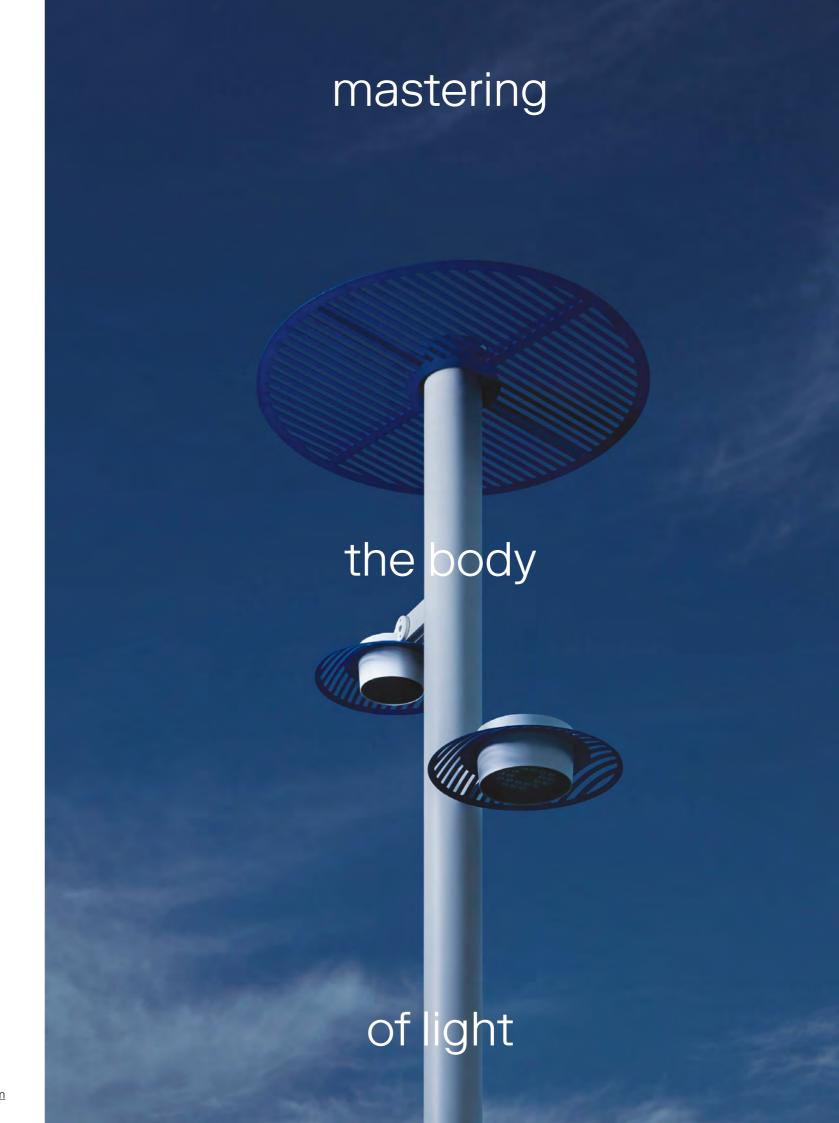



Shape of Light

Through its transformation, Chameleon can transform spaces

.::.

With its unrivalled modularity, Chameleon uses a vast catalogue of mounting options, ewoLightLayers, optics and finishes to adapt seamlessly to a plethora of applications including Architecture and the Arts, Public Spaces, and Roads and Traffic.







Shape of Light

....

Standard distributions ewo's high precision lens optics have the power to transform public spaces into urban sanctuaries, improving people's wellbeing outdoors.

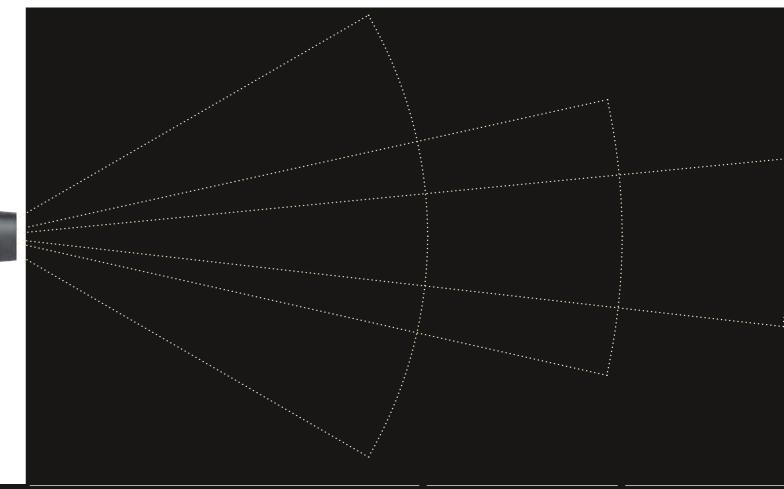

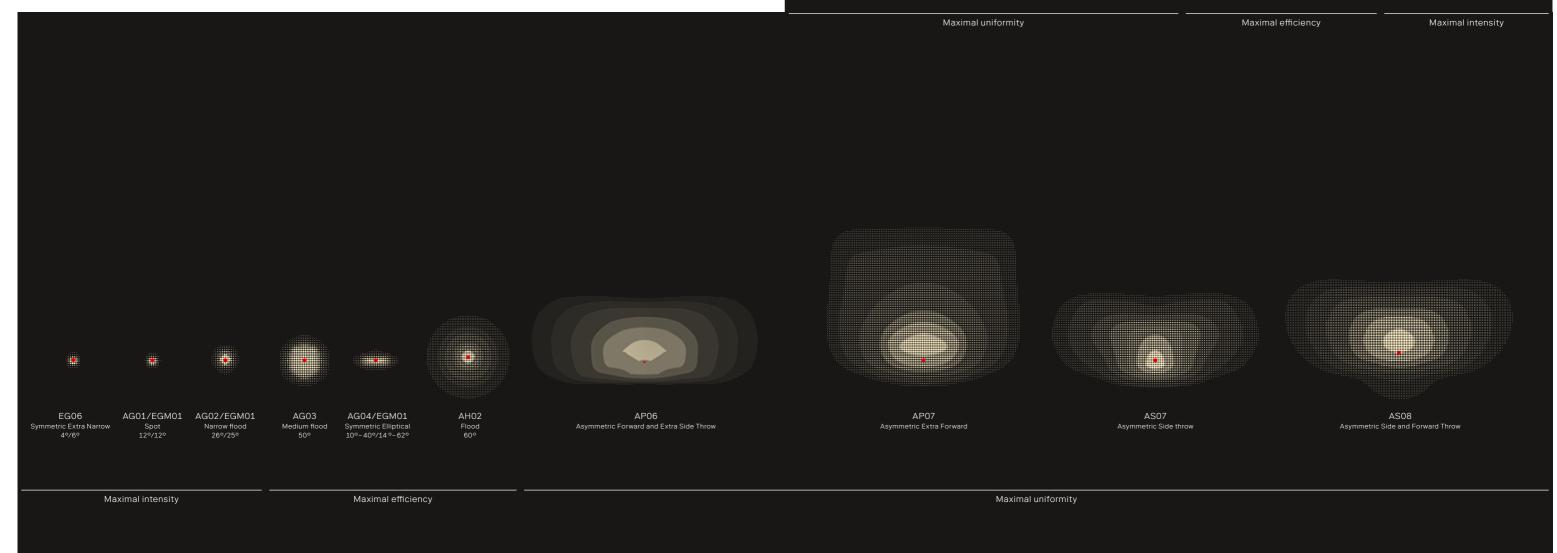



Shape of Light

Colour mixing RGBW

To create the best possible colour experience in a luminaire as compact as Chameleon, ewo has developed a new two-level light guiding lens that will mix colours in each individual lens. Now the desired light effect can even be achieved over short distances whilst maintaining perfect colour uniformity.



Chameleon is the most compact, intelligent projector offering dynamic lighting with in-optic colour mixing and beam angles as narrow as 12°.






reddot winner 2023

BODY OF LIGHT











Monochrome















C165 Slice





C210





C260 Slice














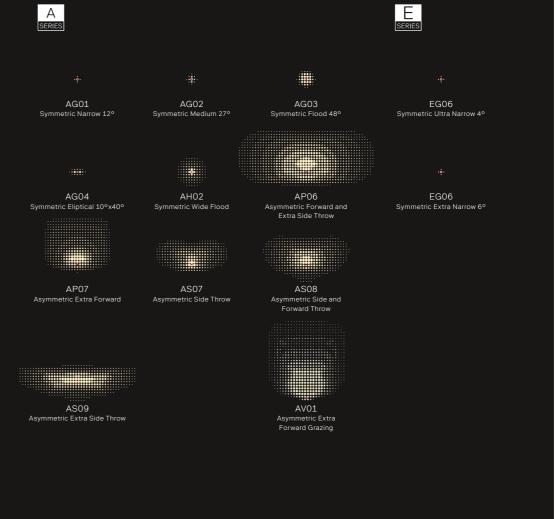

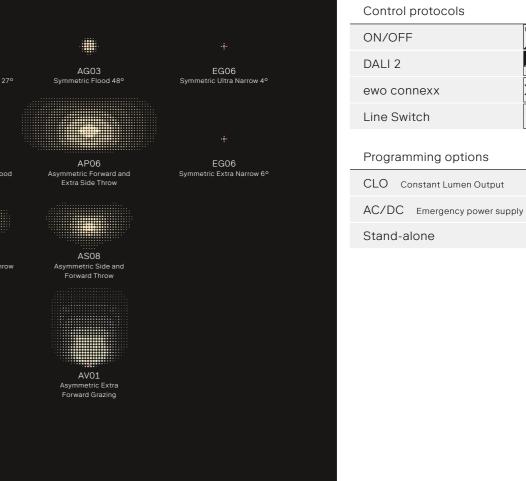





Tunable White Internal/Discrete

RGBW Internal/Discrete

Control protocols

DALI 2	DALI
ewo connexx	××
MX-RDM	DMX





Projector Wall luminaire Pole-mounted system

















Housing

Glass






Housing material

Mounting options

Finish standard color RAL 9007*

Housing finish







	Aluminum die-cast	Model
	Polyester powder coating (ewoECP upon request**)	C90
	RAL 9007*	•••••
•	Safety glass (ESG)	
	Pole, wall, surface	
	Weather and a second second	

* other color on request ** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Model	↓ ૄ ①	→ ° ②	Weight [kg]
C90	0.013*	0.015*	1.2*
	① projected	windage area [m²]	* without accessorie

② lateral windage area [m²]

Operating conditions


I (feeting a	Minister and Company for an alife lifetime antique
Lifetime	Visit the configurator for specific lifetime options

Electrical

	11101101	chrome		Tunable White				RGBW				
			Disc	crete		ernal	Disc	crete	Inte	rnal		
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series		
Protection class	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11		
Voltage [V], [Hz]												
LED nr.	4	1	-	-	-	4	-	-	-	4		
Current max. [mA]	1,000	1,000*	-	-	-	260	-	-	-	400		
LED power [W]	11.7	2.9	-	-	-	1.5	-	-	-	4.7		

* 700 for EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALI XX LS	DALI DMX XX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		-
Software	connexx light management software for remote management of in		

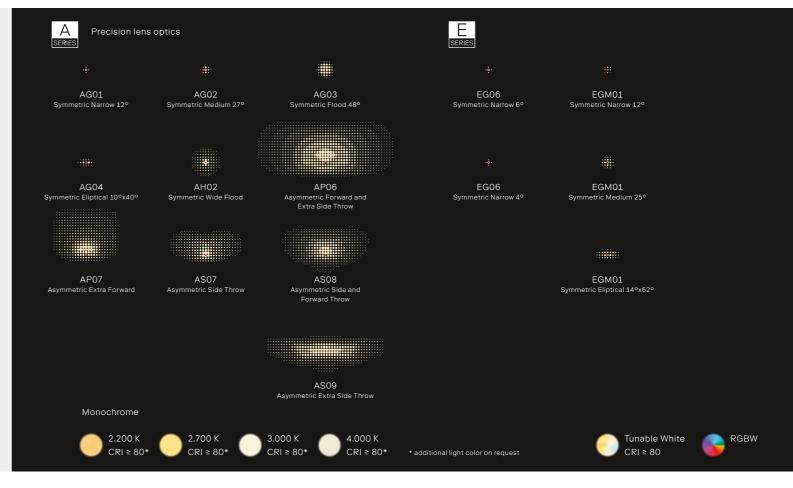

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS08	AS09	EG	06	EGM01	EGM01	EGM01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	4°	6°	12°	25°	14°x62°
Monochrome	•	•	•	•	•	•	•	•	•	•	•			
Tunable White Internal												•	•	•
Tunable White Discrete														
RGBW Internal												•	•	•
RGBW Discrete			•					•				•		•

	Monochrome		Tunable White	RGBW
Light color (K)	4,	000	5,000	4,000
CRI*	≥ 80		≥ 80 ≥ 80	
Distribution	AG01	EG06 6°	EGM01 12°	EGM01 12°
MacAdam ellipses	≤ 3 5	SDCM	≤ 3 SDCM	≤ 3 SDCM
Luminous flux [lm]	1,356	364	200	196
* other CRI on request		•		

Accessories

* field installable but not field changeable ** factory installed





Half Snoot



Internal ewoLightLayers**





Mounting accessories





Full Snoot

Honeycomb Louvre Circular Louvre

Ground Spike Connection Box

Retrofit pole bracket

37





C125 Slice

Projector Wall luminaire Pole-mounted system













Configurator



Housing Housing material

Housing finish

Mounting options

Glass

Finish standard color RAL 9007*











Model	↓ ຼ ①	→ 🕰 ②	Weight [kg]
C125	0.018*	0.025*	2.3*
	① projected	windage area [m²]	* without accessories
	② lateral wir	ndage area [m²]	

115

160

Operating conditions

Lifetime	Visit the configurator for specific lifetime options

Electrical

	11101100	chrome		Tunable White				RGBW				
		•		Discrete		Internal		Discrete		ernal		
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series		
Protection class			1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11		
Voltage [V], [Hz]												
_ED nr.	6	3	-	-	-	12	-	-	-	12		
Current max. [mA]	1,000	1,000*	-	-	-	315	-	-	-	400		
_ED power [W]	17.5	8.8	-	-	-	5.5	-	-	-	14.0		

* 700 for EG06 - 4°

Polyester powder coating (ewoECP upon request**)


** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Aluminum die-cast

Safety glass (ESG)

Pole, wall, surface * other color on request

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALL XX 4	DALI DMX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories Software	Further accessories on request connexx light management software for remote management o	of intelligent luminaire clusters	

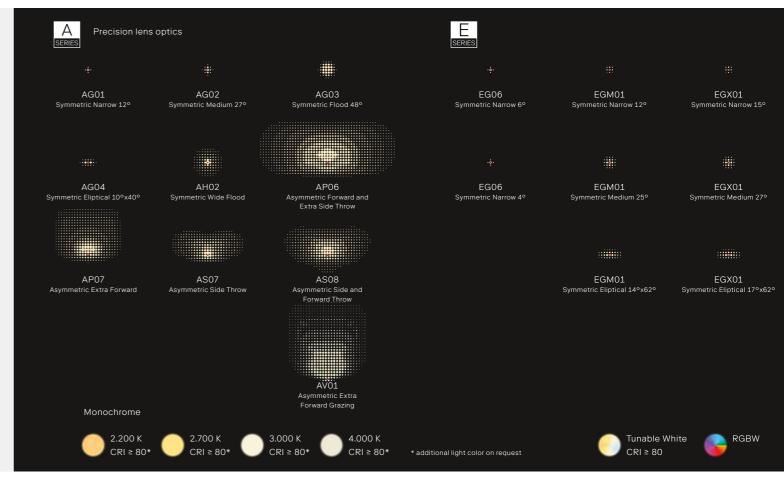

Performance

Distribution AG01 AG02 AG03 AG04 AH02 AP06 AP07 AS07 AS08 AV01 EG06 EGM01 EGM01 EGX01 EG Beam angle 11° 26° 50° 10°x40° 60° - - - - - 4° 6° 12° 25° 14°x62° 15° 27° 17° Monochrome * <																	
Monochrome Tunable White Internal Tunable White Discrete RGBW Internal Tunable White Discrete	Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG	06	EGM01	EGM01	EGX01	EGX01
Monochrome Tunable White Internal Tunable White Discrete RGBW Internal Tunable White Discrete	Beam angle	11°	26°	50°	±0 // .0			-									
Tunable White Internal Tunable White Discrete RGBW Internal		•	•	•	•	•	•	•	•	•	•	•	•				
Tunable White Discrete RGBW Internal	Tunable White Internal														•		•
RGBW Internal • • • • •	Tunable White Discrete																
RGBW Discrete	RGBW Internal														•		•
	RGBW Discrete	•	•••••	•••••	•••••••••••••••••••••••••••••••••••••••		•••••		•••••	••••	•••••		•••••	•	•	••••••	••••••

	Mono	chrome	Tunable White	RGBW
Light color (K)	4,	000	5,000	4,000
CRI*	≥	80	≥ 80	≥ 80
Distribution	AG01 EG06 6°		EGX01 15°	EGX01 15°
MacAdam ellipses	≤ 3 SDCM		≤ 3 SDCM	≤ 3 SDCM
Luminous flux [lm]	2,200	1,090	700	970
* other CRI on request				

Accessories

* field installable but not field changeable ** factory installed

External ewoLightLayers*

















Full Snoot

Half Snoot

Honeycomb Louvre Circular Louvre

Ground Spike Connection Box

Retrofit pole bracket





C165 Slice

Projector Wall luminaire Pole-mounted system













Configurator







Housing material

Mounting options

Finish standard color RAL 9007*

Housing finish

Glass

Aluminum die-cast

Safety glass (ESG)

Pole, wall, surface * other color on request





Measurements

Model	↓ ° ①	→[♣ ②	Weight [kg]
C165	0.020*	0.027*	3.3*
	 projected 	windage area [m²]	* without accessories
	② lateral wir	ndage area [m²]	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
LITELITIE	VISIL LITE COTTIGUIATOF FOR SDECTIFC ITTELLITIE ODITIONS

Electrical


		chrome		1011001	e White			RGBW				
				rete		rnal	Disc	rete	Internal			
	A-Series	E-Series										
Protection class	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11		
Voltage [V], [Hz]		•		•	•	•	•	•				
LED nr.	12	7	12	-	-	28	12	-	-	28		
Current max. [mA]	900	1,000*	900	-	-	500	900	-	-	500		
_ED power [W]	31.4	21.3	14.3	-	-	22.3	33.6	-	-	41.1		

* 700 for EG06 - 4°

Polyester powder coating (ewoECP upon request**)

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON LIS	DALI DMX XX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories Software	Further accessories on request connexx light management software for remote management of intelligent	luminaire clusters	

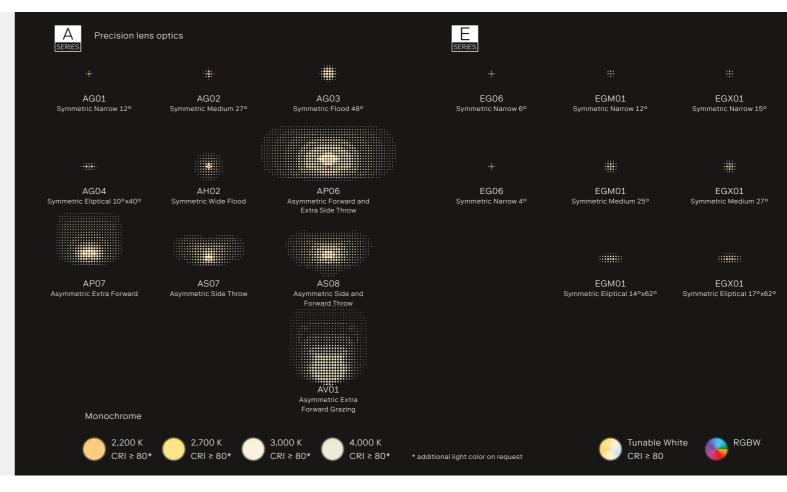

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG06	EGM01	EGM01	EGX01	EGX01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	4° 6°		14°x62°		
Monochrome	•	•	•	•	•	•	•	•	•	•	• •				
Tunable White Internal													•		•
Tunable White Discrete						•	•		•	•					
RGBW Internal													•		•
RGBW Discrete	••••	•••••	•	•		•	•	•••••	•	•	•••••	••••••	•••••	••••••	••••••

	Mono	chrome	Tunab	le White	RGBW		
Light color (K)	4,	000	5,	000	4,000		
CRI*	≥	80	≥	80	≥ 80		
Distribution	AG01	EG06 6°	AV01	EGX01 15°	AV01	EGX01 15°	
MacAdam ellipses	≤ 3 SDCM		≤ 3 5	SDCM	≤ 3 SDCM		
Luminous flux [lm]	4,080	2,550	1,500	2,300	1,140	2,650	
* other CRI on request							

Accessories

* field installable but not field changeable ** factory installed

External ewoLightLayers*









Half Snoot









Full Snoot

Honeycomb Louvre Circular Louvre

Ground Spike

Connection Box

Retrofit pole bracket

40 1st edition, October 2023; Copyright: © ewo srl/GmbH ewo.com



Chameleon reddot winner 2023



C210 Slice

Projector Wall luminaire Pole-mounted system




















Housing

Configurator

(€ □ ⊕ 🖜

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
	* other color on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	↓ ૄ ①	→ ^ © ②	Weight [kg]
C210	0.025*	0.03*	4.9*
	① projected	windage area [m²]	* without accessories
	② lateral win	idage area [m²]	

Operating conditions


Lifetime	Visit the configurator for specific lifetime options
LITELITIE	VISIL LITE COTTIGUIATOF FOR SDECTIFC ITTELLITIE ODITIONS

Electrical

		chrome			e White		RGBW			
			Discrete Internal				crete	Internal		
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series
Protection class	1/11	1/11	I	I	l	I	I	I	I	I
Voltage [V], [Hz]										
LED nr.	24	16	24	-	-	64	24	-	-	64
Current max. [mA]	900	1,000*	1,000	-	=-	500	900	-	-	500
LED power [W]	63.1	46.8	35.6	-	-	46.7	95.7	-	-	94.0

* 700 for EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALL XX 4	DALI DMX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories Software	Further accessories on request connexx light management software for remote management o	of intelligent luminaire clusters	

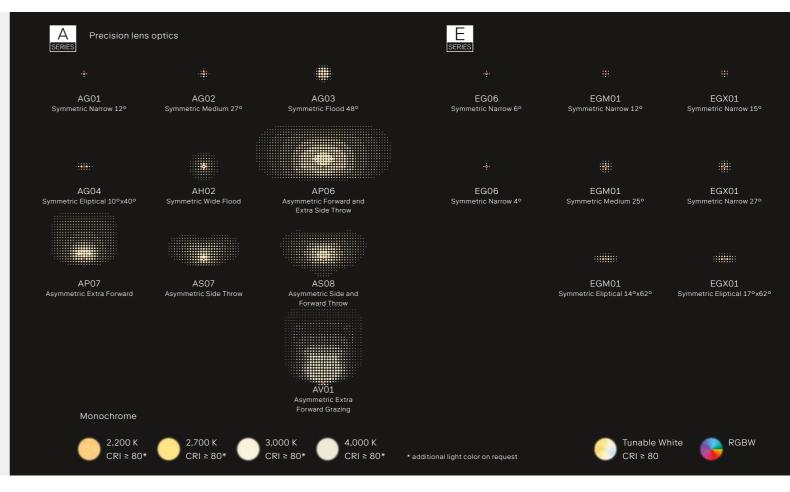

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG06	EGM01	EGM01	EGX01	EGX01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	4° 6°		14°x62°		
Monochrome	•	•	•	•	•	•	•	•	•	•					
Tunable White Internal													•		•
Tunable White Discrete						•	•		•	•					
RGBW Internal													•		•
RGBW Discrete	••••	•••••	•	•		•	•	•••••	•	•	•••••	•••••	•••••	••••••	••••••

	1110110	chrome		ole White	RGBW		
Light color (K)	4,	000	5	,000	4,000		
CRI*	≥ 80			≥ 80	≥ 80		
Distribution	AG01	EG06 6°	AV01	EGX01 15°	AV01	EGX01 15°	
MacAdam ellipses	≤ 3 3	≤ 3 SDCM		SDCM	≤ 3 SDCM		
Luminous flux [lm]	8,160	5,830	3,500	5,300	3,410	6,050	
* other CRI on request			•				

Accessories

* field installable but not field changeable ** factory installed











Half Snoot











Full Snoot

Honeycomb Louvre Circular Louvre

Ground Spike Connection Box

Retrofit pole bracket

43





C260 Slice

Projector Wall luminaire Pole-mounted system




















(€ □ ⊕ 🖜

Configurator



Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
	* other color on request

* ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	↓ ^ ①	→ ° ②	Weight [kg]
C260	0.030*	0.044*	6.7*
	① projected wi	ndage area [m²]	* without accessories
	② lateral winda	ige area [m²]	

Operating conditions


Lifetime	Visit the configurator for specific lifetime options
LITELITIE	VISIL LITE COTTIGUIATOF FOR SDECTIFC ITTELLITIE ODITIONS

Electrical

		chrome			e White		RGBW			
			Discrete Internal					crete	Internal	
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series
Protection class	1/11	1/11	I	I	l I	I	l	I	I	I
Voltage [V], [Hz]										
_ED nr.	36	24	36		-	96	36	-	-	96
Current max. [mA]	1,000	1,000*	1,050		=-	500	900	-	-	500
_ED power [W]	105.0	70.5	87.0	-	-	70.8	97.7	-	-	140.9

* 700 per EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON USE DALL XX L/S	DALI DMX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		······································
Software	connexx light management software for remote management o	of intelligent luminaire clusters	

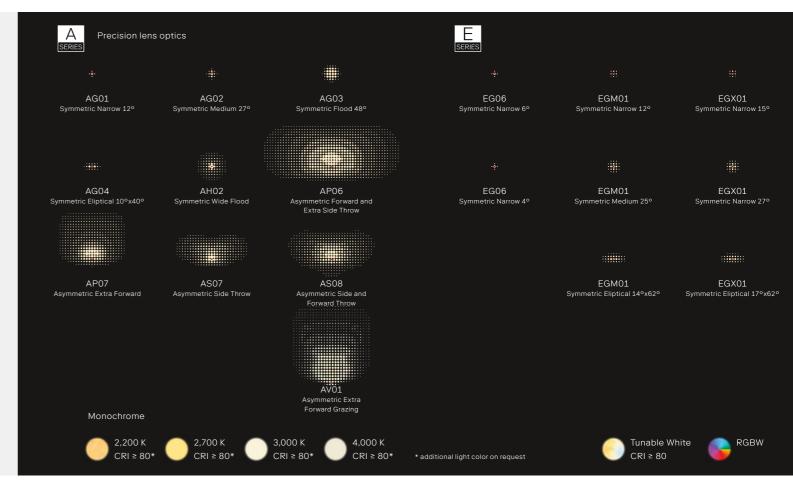

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG06	EGM01	EGM01	EGX01	EGX01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	4° 6°	12° 25°	1- XOZ		1/ //
Monochrome	•	•	•	•	•	•	•	•	•	•	• •				
Tunable White Internal													•		•
Tunable White Discrete						•	•		•	•					
RGBW Internal													•		•
RGBW Discrete						•	•		•	•					

		chrome		le White	RGBW		
Light color (K)	4,0	000	5	,000	4,000		
CRI*	≥	80	1	: 80	≥ 80		
Distribution	AG01	EG06 6°	AV01	EGX01 15°	AV01	EGX01 15°	
MacAdam ellipses	≤ 3 SDCM		≤ 3	SDCM	≤ 3 SDCM		
_uminous flux [lm]	13,270	8,750	5,300	8,000	3,410	9,080	
other CRI on request	-		•				

Accessories

* field installable but not field changeable ** factory installed

External ewoLightLayers*









Half Snoot









Full Snoot

Honeycomb Louvre Circular Louvre

Ground Spike Connection Box

Retrofit pole bracket





Projector Wall luminaire Pole-mounted system















IP66 RoHS IK08

Housing

Configurator

(€ □ ⊕ 🖜

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
•••••	* other color on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	↓ ૄ ①	→_* ②	Weight [kg]
C365	0.045*	0.055*	11.2*
	 Projected 	windage area [m²]	•
	2 Lateral wi	ndage area [m²]	
	*		


Operating conditions

Lifetime	Visit the configurator for specific lifetime options
LITELITIE	VISIL LITE COTTIGUIATOF FOR SDECTIFC ITTELLITIE ODITIONS

Electrical

		chrome		Tunabl	e White		RGBW				
			Disc	Discrete		Internal		crete	Internal		
	A-Series	E-Series									
Protection class	1/11	1/11	l I	l I	l I	l I	l I	I	l I	I	
Voltage [V], [Hz]											
LED nr.	128	60	128	-	-	-	128	-	-	-	
Current max. [mA]	1,000	1,000	1,000	-	-	-	500	-	-	-	
LED power [W]	369.2	176.6	184.5	-	-	-	180.0	-	-	-	

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALI XX Ly	DALI DMX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connexx light management software for remote mana	gement of intelligent luminaire clusters	

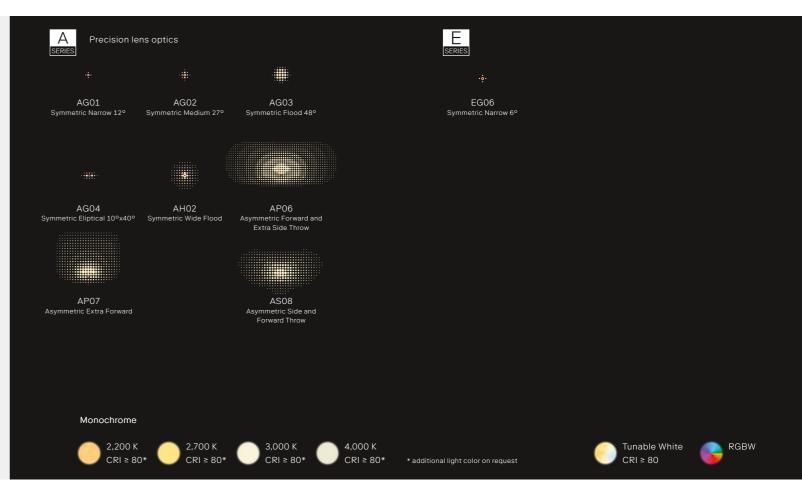


Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS08	EG06
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	6°
Monochrome	•	•	•	•	•	•	•	•	•
Tunable White Internal									
Tunable White Discrete	•	•	•	•	•				
RGBW Internal									
RGBW Discrete	•	•	•	•	•	•••••	•••••	•••••••••••••••••••••••••••••••••••••••	

	11101100	chrome	Tunable White	RGBW			
Light color (K)	4,0	000	5,000	4,000			
CRI*	≥	80	≥ 80	≥ 80			
Distribution	AG01	EG06 6°	AG01	AG01			
MacAdam ellipses	≤ 3 S	DCM	≤ 3 SDCM	≤ 3 SDCM			
Luminous flux [lm]	43,100 21,870		22,800	11,100			
* other CPI on request		-					

Accessories

External ewoLightLayers*





Mounting accessories



Full Snoot Half Snoot Ground Spike Connection Box

Retrofit pole bracket

47

reddot winner 2023

BODY OF LIGHT





SHAPE OF LIGHT



INTELLIGENCE OF LIGHT

Monochrome

ON/OFF

DALI 2

ewo connexx

Line Switch

Programming options

CLO Constant Lumen Output

AC/DC Emergency power supply

Control protocols

C125 Integral


























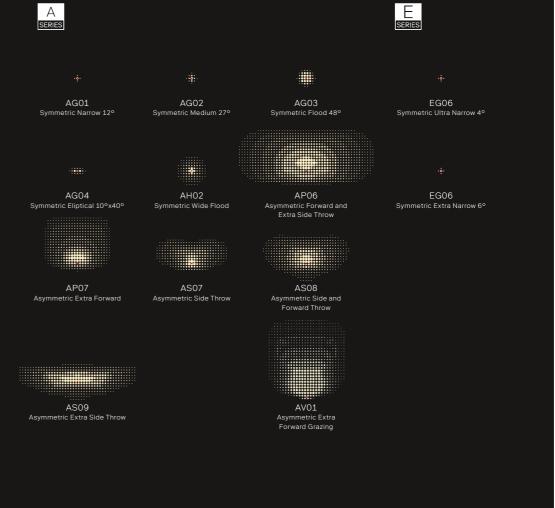

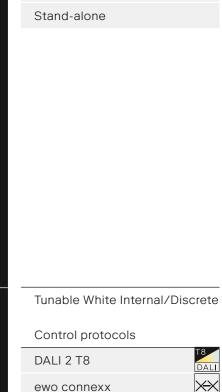







Chameleon reddot winner 2023



C125 Integral

Projector Wall luminaire Pole mounted system



























Housing

Configurator

(€ □ ⊕ 🖜

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
	* other colors on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	1 1	→ ° ②	Weight [kg]
C125	0.018*	0.025*	2.8*
	 Projected 	windage area [m²]	
	② Lateral wi	ndage area [m²]	
	* without ac	cessories	

Operating conditions


Lifetime	Visit the configurator for specific lifetime options

Electrical

		chrome			e White		RGBW					
	•	•		crete		rnal	Disc	crete	Internal			
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series		
Protection class	1/11	1/11	1711	1/11	1/11	1/11	1/11	1/11	1/11	1/11		
Voltage [V], [Hz]		0, 50/60		0, 50/60	220-24	0, 50/60	220-240, 50/60		220-240, 50/60			
_ED nr.	6	3	-	-	-	12	-	-	-	12		
Current max. [mA]	1,000	1,000*	-			- 210		= =		250		
ower max. [W]	21.1	11.3	-			- 4.4		-	-	11.7		

* 700 for EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON LIS	DALI DMX XX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories Software	Further accessories on request connexx light management software for remote management of intelligent	luminaire clusters	

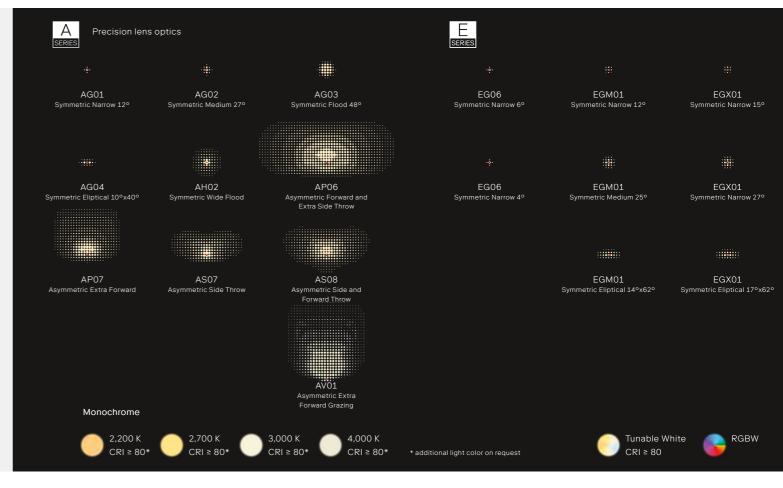

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG06	EGM01	EGM01	EGX01	EGX01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	4° 6°	12° 25°	14°x62°	15° 27°	17°x62°
Monochrome	•	•	•	•	•	•	•	•	•	•					
Tunable White Internal													•		•
Tunable White Discrete															
RGBW Internal													•		•
PGRW Discrete	•		•	•••••••••••••••••••••••••••••••••••••••		•••••	•••••	•••••	•••••	•	•••••	••••••	•••••	•••••	• • • • • • • • • • • • • • • • • • • •

	Monochrome		Tunable White	RGBW	
Light color (K)	4,000		5,000	4,000	
CRI*	≥ 80		≥ 80 ≥ 80		≥ 80
Distribution	AG01	EG06 6°	EGX01 15°	EGX01 15°	
MacAdam ellipses	≤ 3 5	SDCM	≤ 3 SDCM	≤ 3 SDCM	
Luminous flux [lm]	2,200	1,090	500	680	
* other CRI on request					

Accessories

* field installable but not field changeable ** factory installed

51

External ewoLightLayers*







Full Snoot



Half Snoot



Honeycomb Louvre Circular Louvre







Retrofit pole Ground Spike Connection Box bracket





C165 Integral

Projector Wall luminaire Pole mounted system



















Housing

Configurator

(€ □ ⊕ 🖜

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
	* other colors on request

* ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	↓ <u>[</u> ①	→ ਼ ②	Weight [kg]
C165	0.020*	0.027*	3.9*
	① Projected	windage area [m²]	
	2 Lateral wi	ndage area [m²]	
	* without ac	cessories	

Operating conditions


Lifetime	Visit the configurator for specific lifetime options
LITELITIE	VISIL LITE COTTIGUIATOF FOR SDECTIFC ITTELLITIE ODITIONS

Electrical

		chrome		Tunabl	e White		RGBW					
		•		Discrete		Inte	Internal		Discrete		Internal	
••••••	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series		
Protection class	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11	1/11		
Voltage [V], [Hz]	220-24	0, 50/60	220-240, 50/60		220-240, 50/60		220-240, 50/60		220-240, 50/60			
LED nr.	12	7	12	-	-	28	12	-	-	28		
Current max. [mA]	800	1,050*	560	-	-	240	250	-	-	250		
Power max. [W]	31.1	22.9	11.7	-	-	11.7	11.2	-	-	23.1		

* 700 for EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALI XX US	DALI DMX XX	T8 XX
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories Software	Further accessories on request connexx light management software for remote management of intelligent	luminaire clusters	

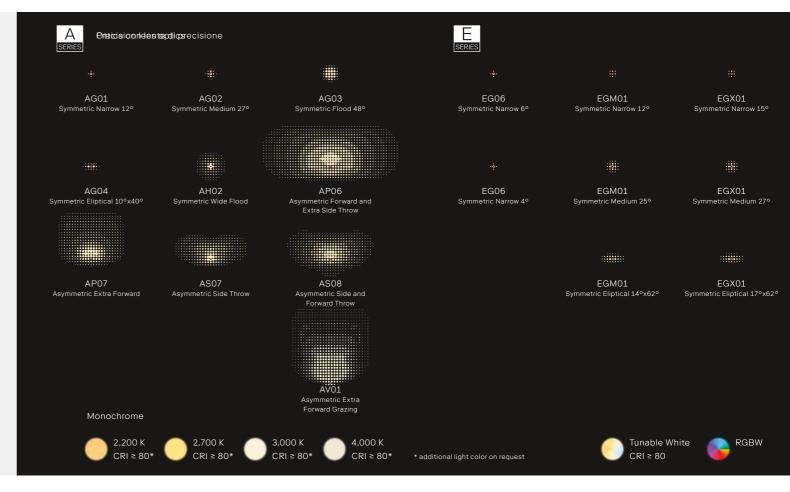

Performance

Distribution	ΔG01	ΔG02	AG03	AG04	ΔΗ02	ΔΡ06	ΔΡ07	ΔS07	AS08	AV01	FG06	FGM01	FGM01	FGX01	FGX01
Ream angle	110	26°	50°	1007/00	60°			- 1007		- 71701	40 60	120 250	14°x62°	150 270	170v620
Monochromo		20									- 0		1- XOZ	10 27	
Tunchlo White Internal	······································	············	······································	······································	······	•	•	•		•		•	•	·•····	· *· ·····
Tunable White Internal	.			······································		•		•		•	·•·····		•••••	············	· • · · · · · · · · · · · · · · · · · ·
lunable White Discrete	-		•••••			•	•	*	•	•		•	•		· * ·····
RGBW Internal						•		•			. .				•
RGBW Discrete						•	•		•	•					

	Monochrome			ole White	RGBW		
Light color (K)	4,	000	5	,000	4,000		
CRI*	≥	80	:	≥ 80	≥ 80		
Distribution	AG01	EG06 6°	AS08	EGX01 15°	AV01	EGX01 15°	
MacAdam ellipses	≤ 3 5	≤ 3 SDCM		SDCM	≤ 3 SDCM		
Luminous flux [lm]	3,730	2,650	1,100	1,300	460	1,580	
* other CRI on request					•		

Accessories

* field installable but not field changeable ** factory installed











Half Snoot











Full Snoot

Honeycomb Louvre Circular Louvre

Ground Spike Connection Box

Retrofit pole bracket





C210 Integral

Projector Wall luminaire Pole mounted system

















Housing

Configurator

(€ □ ⊕ 🖜

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
	* other colors on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	↓ 1	→ 🔁 ②	Weight [kg]
C210	0.025*	0.03*	5.9*
	 Projected 	windage area [m²]	
	② Lateral wi	ndage area [m²]	
	* 116		

Operating conditions


Lifetime	Visit the configurator for specific lifetime options
LITELITIE	VISIL LITE COTTIGUIATOF FOR SDECTIFC ITTELLITIE ODITIONS

Electrical

	11101101	chrome		Tunable White				RGBW			
		•		rete		ernal		crete	Inte	rnal	
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	
Protection class	1/11	1/11	I	l I	l I	I	l I	l	l I	I	
Voltage [V], [Hz]		0, 50/60	220–240, 50/60		220-240, 50/60		220-240, 50/60		220-240, 50/60		
LED nr.	24	16	24	-	-	64	24	-	-	64	
Current max. [mA]	750	1,000*	1,000	-	-	500	850	-	-	500	
Power max. [W]	56.9	51.7	43.4	-	-	57.0	73.4	-	-	109.0	

* 700 for EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALI XX US	DALI DMX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories Software	Further accessories on request connexx light management software for remote management of intelligent		

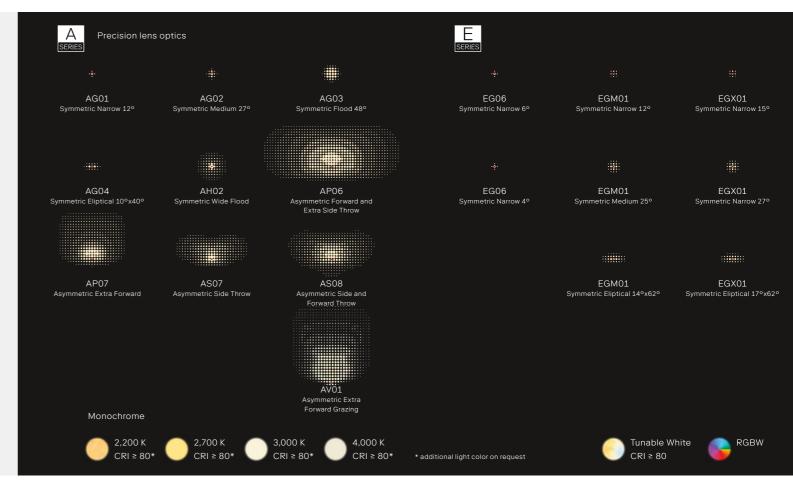

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG06	EGM01	EGM01	EGX01	EGX01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	4º 6º		14°x62°		
Monochrome	•	•	•	•	•	•	•	•	•	•					
Tunable White Internal													•		•
Tunable White Discrete						•	•		•	•					
RGBW Internal													•		•
RGBW Discrete	•	•••••	•	•••••••••••••••••••••••••••••••••••••••		•	•	•	•	•	•••••	••••••	•••••	••••••	••••••

		chrome		ole White	RGBW		
Light color (K)	4,	000	5	,000	4,000		
CRI*	≥	80	:	≥ 80	≥ 80		
Distribution	AG01	EG06 6°	AV01	EGX01 15°	AV01	EGX01 15°	
MacAdam ellipses	≤ 3 SDCM		≤ 3	SDCM	≤ 3 SDCM		
Luminous flux [lm]	7,100	5,830	3,500	5,300	2,200	6,050	
* other CRI on request							

Accessories

* field installable but not field changeable ** factory installed

Retrofit pole bracket

55

External ewoLightLayers*







Full Snoot











Half Snoot Honeycomb Louvre Circular Louvre Ground Spike Connection Box





C260 Integral

Projector Wall luminaire Pole mounted system















Housing

Configurator

(€ □ ⊕ 🖜

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard color	RAL 9007*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
	* other colors on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	↓ <u>°</u> 1	→ ②	Weight [kg]
C260	0.030*	0.044*	7,6*
	① Projected	•	

Operating conditions


Lifetime	Visit the configurator for specific lifetime options

Electrical

	11101100	chrome			e White		RGBW				
				Discrete		ernal		crete	Internal		
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	
Protection class	1/11	1/11	I	l I	l I	I	l I	l	l I	I	
Voltage [V], [Hz]		0, 50/60		0, 50/60	220-24	0, 50/60	220-240, 50/60		220-240, 50/60		
LED nr.	36	24	36	-	-	96	36	-	-	96	
Current max. [mA]	700	900*	700	-	-	500	250	-	-	250	
Power max. [W]	80.5	69.8	43.2	-	-	86.4	30.8	-	-	83.2	

* 700 for EG06 - 4°

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	ON DALI XX L/S	DALI DMX	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	\(\frac{1}{2}\)	
Control accessories	Further accessories on request		······································
Software	connexx light management software for remote management of intelli	gent luminaire clusters	

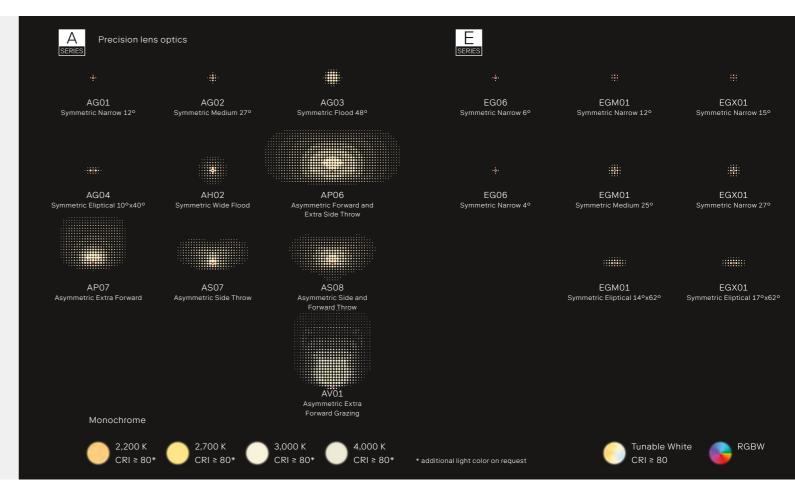

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP06	AP07	AS07	AS08	AV01	EG06	EGM01	EGM01	EGX01	EGX01
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	4° 6°	12° 25°	14°x62°		17°x62°
Monochrome	•	•	•	•	•	•	•	•	•	•					
Tunable White Internal													•		•
Tunable White Discrete						•	•		•	•					
RGBW Internal													•		•
RGBW Discrete						•	•		•	•					

		chrome		le White	RGBW		
Light color* (K)	4,0	000	5	,000	4,000		
CRI*	≥	80	≥ 80		≥ 80		
Distribution	AG01	EG06 6°	AV01	EGX01 15°	AV01	EGX01 15°	
MacAdam ellipses	≤ 3 SDCM		≤ 3	SDCM	≤ 3 SDCM		
Luminous flux [lm]	10,100	8,060	3,900	8,000	1,390	5,420	
* other CRI on request							

Accessories

* field installable but not field changeable ** factory installed

External ewoLightLayers*









Half Snoot









Full Snoot

Honeycomb Louvre Circular Louvre


Ground Spike Connection Box

Retrofit pole bracket




Special options


Shadow Sail

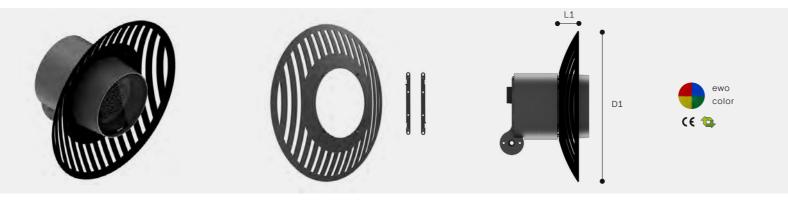

Heritage Sail

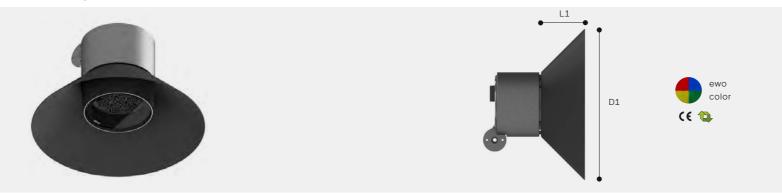

Snoot transparent

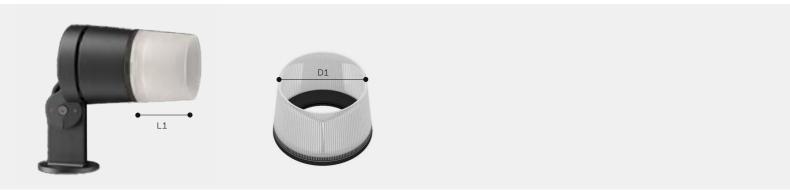

Support for scenic filters



Shadow Sail

Model Slice/Integral	Article	L1 [mm]	D1 [mm]	Note
C125	1062093	56	331	
C165	1062094	50	375	Parts are Polyester powder coating as the luminaire.
C210	1062095	45	420	The accessories can be mounted subsequently by the customer
C260	1062096	40	465	

Heritage Sail

Model Slice/Integral	Article	L1 [mm]	D1 [mm]	Note
C125	1062089	56	331	
C165	1062090	50	375	Parts are Polyester powder coating as the luminaire.
C210	1062091	45	420	The accessories cannot be mounted after installation.
C260	1062092	42	470	

Snoot transparent

Model Slice/Integral	Article	L1 [mm]	D1 [mm]	Note
C125	1062266			
C165	1062246	108	135	Polycarbonate snoots. The accessories can be assembled on site but cannot be dismantled.
C210	1062267			

Support for scenic filters

Model Slice/Integral	Article	L1 [mm]	D1 [mm]	Note
C90	1062xxx	-	-	
C125	1062xxx	114	16	Support for scenic filters,
C165	1062244	154	16	can be installed on site by the user. Filter unit mounting via clip on
C210	1062xxx	199	16	projector.
C260	1062xxx	248	16	



Special options

V-Notch



V-Notch

Model Slice/Integral	Article	L1 [mm]	D1 [mm]	Note
C90 /C125 / C165	1062098	258	133	The accessory cost is related to the pole modification only and must be added to
C210 / C265	1062099	258	133	the standard price of the chosen pole.

Catenary



Catenary

Model Slice	Article	L1 [mm]	D1 [mm]	Note
C125 / C165	1021721	172	60	Fixation for Slice models: for integral ones on request. Element powder-coated, same colour as
C210 / C260	1021722	172	70	the projector. Compatible rope diameters: Ø6 mm - Ø14 mm, 360° rotatable.


Single pole adapter



Single pole adapter

Model Slice/Integral	Article	Ø pole	Ø (9)	Note
C125 - C165	1062247	76	60	
C210 - C260	1062255	76	70	Pole bracket for Chameleon installation, support for pole top Ø76 mm and Ø114
C125 - C165	1062253	114	60	mm. Single arm.
C210 - C260	1062257	114	70	

Duple pole adapter

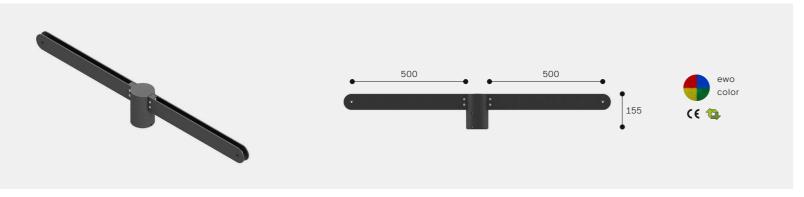

Duple pole adapter

Model Slice/Integral	Article	Ø pole	Ø (9)	Note
C125 - C165	1062248	76	60	
C210 - C260	1062256	76	70	Pole bracket for Chameleon installation, support for pole top Ø76 mm and Ø114
C125 - C165	1062254	114	60	mm. Double arm.
C210 - C260	1062258	114	70	

61








STREETS WALKWAYS PEDESTRIAN CROSSINGS



The F-System is a comprehensive lighting system, designed by Joerg Boner, featuring three sizes (M, S and XS) allowing it to effortlessly scale to a plethora of architectures. Luminaires are available with single or double head, wall mounted or with a bracket for suspended applications. Optically, the F-System can be configured with either A-Series high precision lens optics or T–Series low glare ewoLightTile for tunable white applications bringing humancentric lighting to urban spaces.



ewo.com

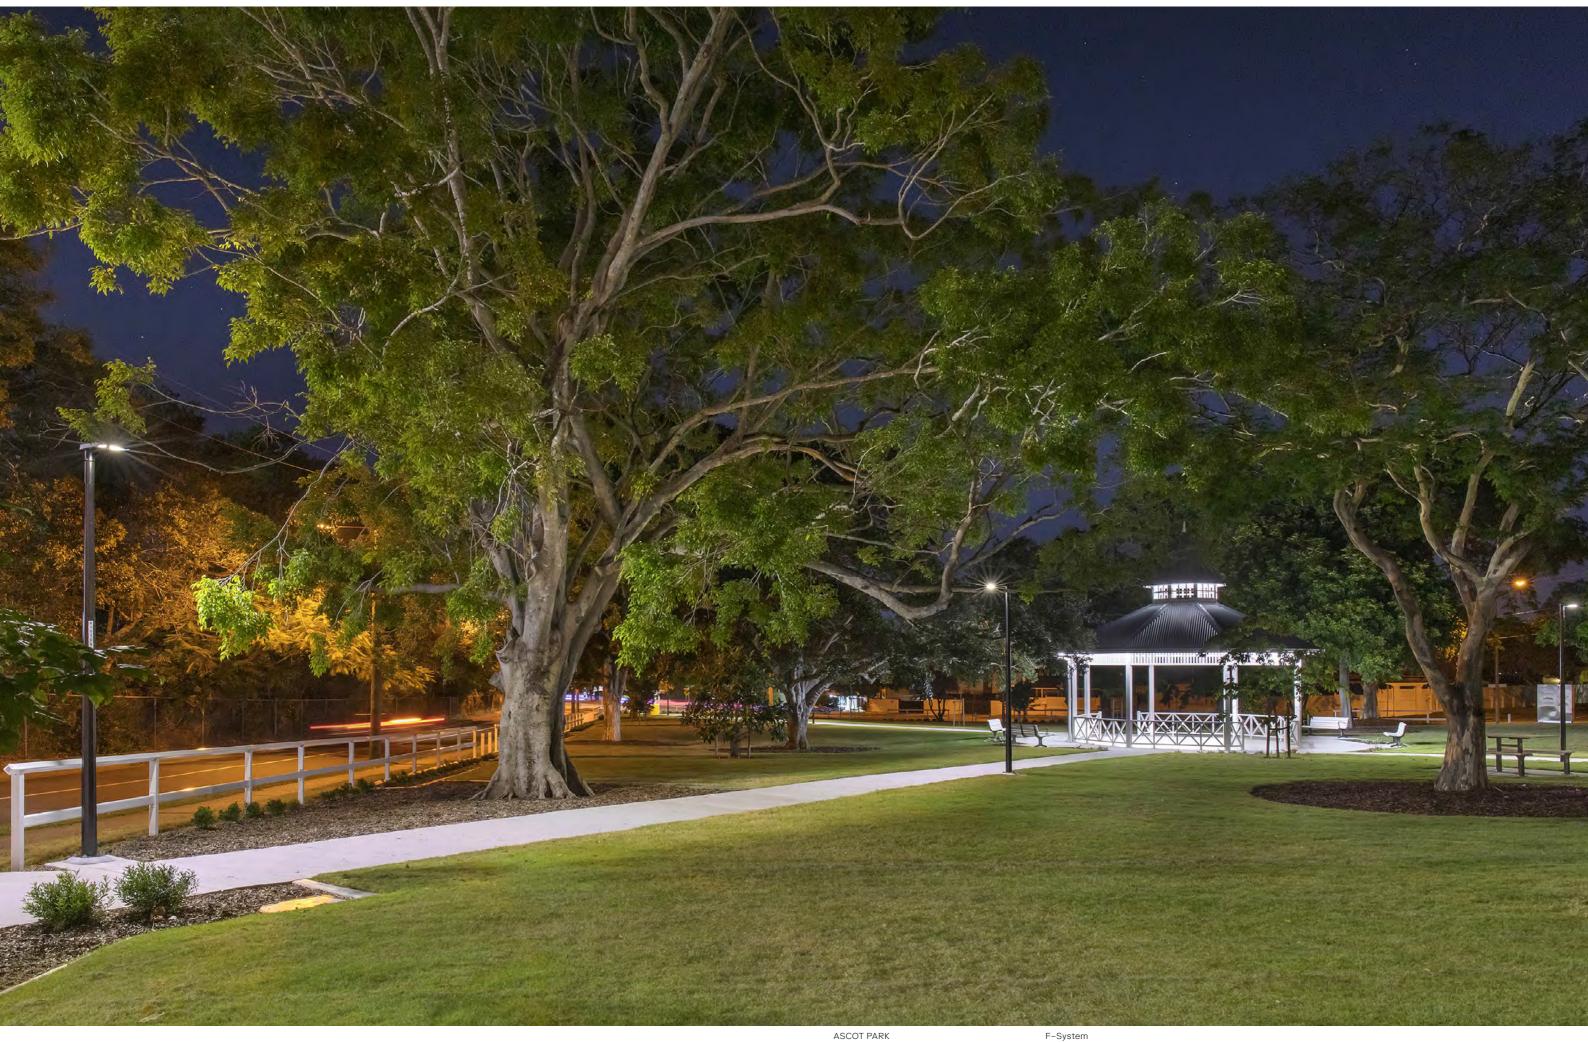

ewo.com

BILL BROWN RESERVE Brisbane, Australia, 2020 F-System



BILL BROWN RESERVE Brisbane, Australia, 2020 F-System, R-System




COMUNE DI VILLANDRO Villandro, Italy, 2022 F-System







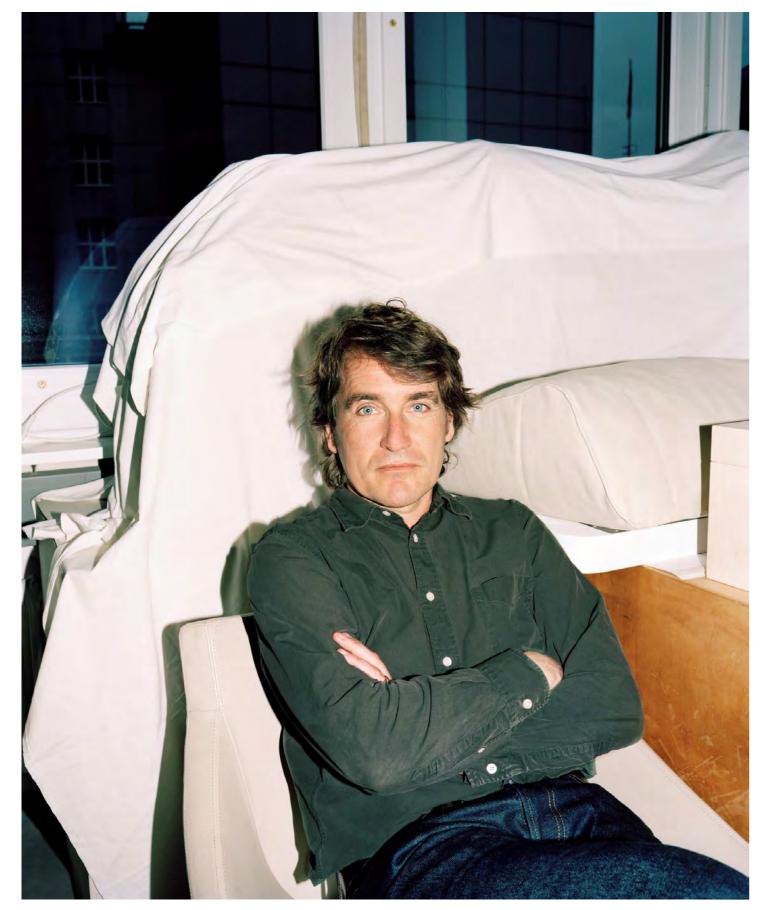

Designer Jörg Boner







The pole mounted variants are compatible with many pole diameters and can also be adjusted in $5^{\rm o}$ increments from 0-90°, for pole-tops with a diameter of Ø76 mm or Ø60 mm.






Luminaires are fitted with a cover that can be opened without the use of tools, making this luminaire family very easy to maintain.

Intelligence of Light



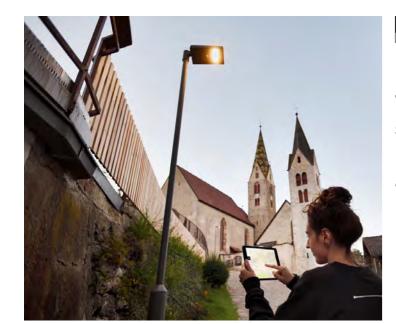









With DALI, 1–10 V and stand alone line switch control, the F-System can easily be controlled to maximise both safety and energy saving.




Intersections and crosswalks – 20 % KwH - 42 % KwH - 68 % KwH - 33 % KwH

City light zoning

Dimming is an excellent way to save money and electricity without sacrificing safety. It allows optimal management of resources, going on to dramatically cut both costs and consumption.


A functional lighting system was developed for Villanders to drastically minimise energy waste by up to 45 % and to reduce light pollution in accordance with regulations. For pedestrian and residential areas, for instance, it was possible to introduce up to three different stages of dimming between 10 p.m. and system shutdown.

71

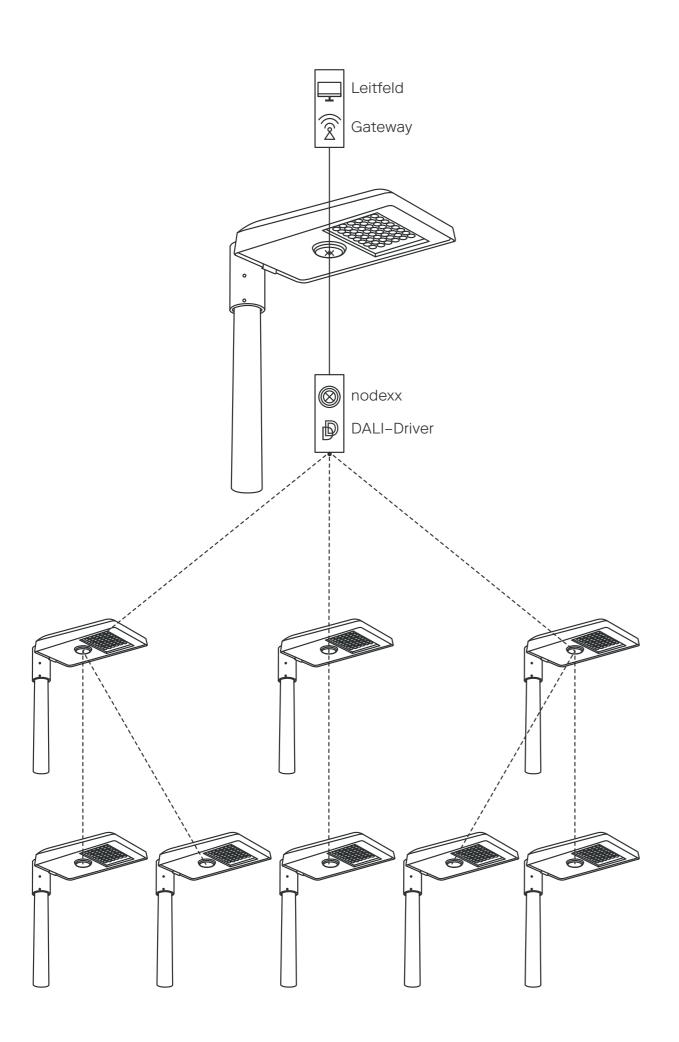

The F-System can also be specified with Zhaga interface for smart city integration and intelligent central lighting control. This is an important feature to onboard urban lighting into the internet of things.

Flexibility creates the possibility of grouping luminaires by manually managing and dimming the lighting. This allows squares, streets, and pathways to be lit in any desired or preferred pattern. In addition, software programming responds to changing needs, such as Christmas lighting or one-off events.

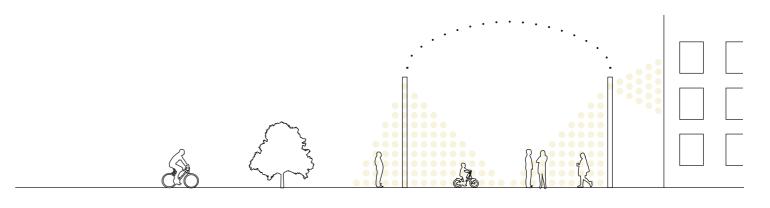



Shape of Light

The F-System is compatible with ewo's A-Series precision lens optics or ewoLightTile, low glare light guiding panels. Fitted with A-Series optics, the T-Series becomes an ideal luminaire for streetlighting and pathway applications. The homogenous yet precise ewoLightTile optics on the other hand, brings dynamic lighting to public spaces to improve wellbeing outside.

ewoLightLayers

With the new optical accessory, ewoLightLayers, the light guidance of the A–Series is even more precise. To the already extensive range of light distributions, the two effects rear light shield and glare shield increase the choice even more.

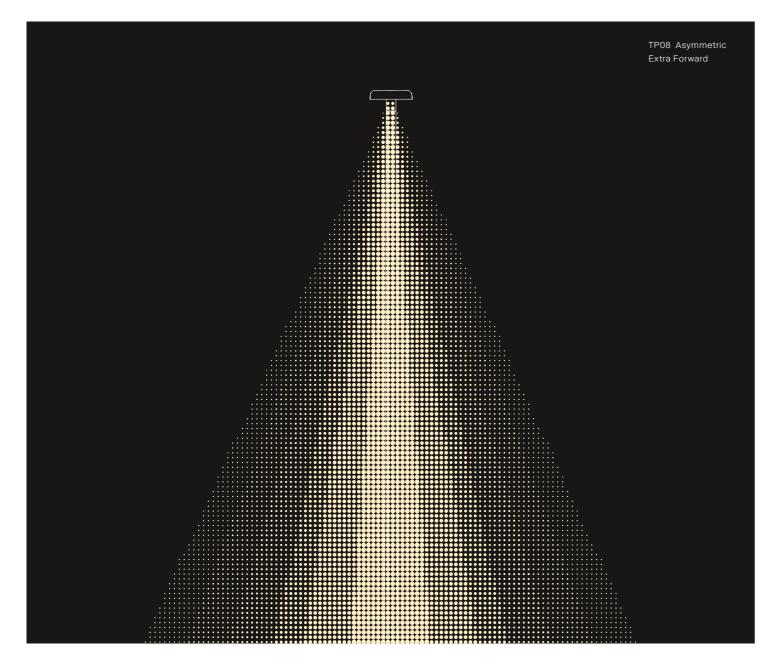

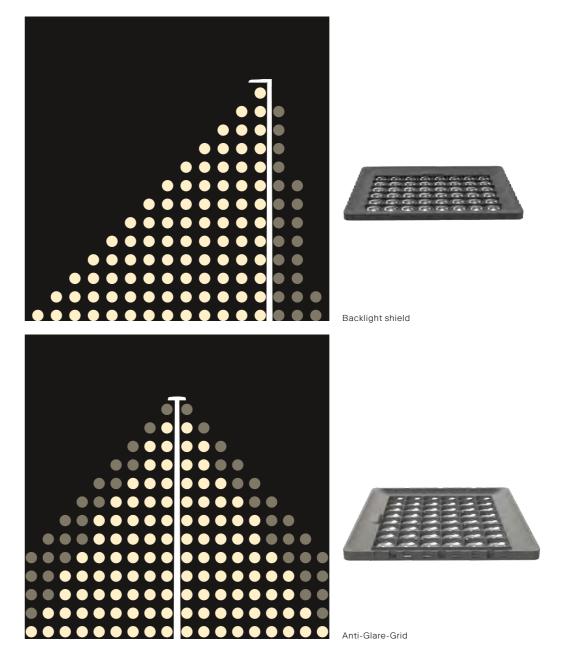



PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology

ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA 9.6-36.9 W per ewoLightTile

Luminous flux up to 2,300 lm per ewoLightTile

Asymmetric Side and Forward Throw TP08 Asymmetric Extra Forward


horizontal array

Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.


Modular Combinations

For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

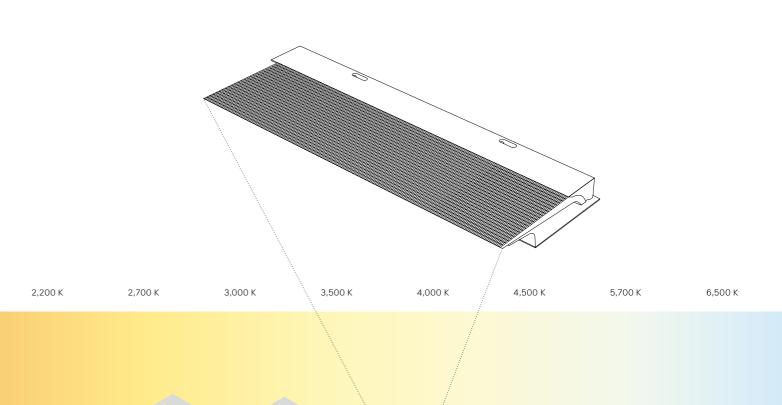


Tunable White CRI ≥ 80

vertical array luminous range: 3xLPH *.*::.

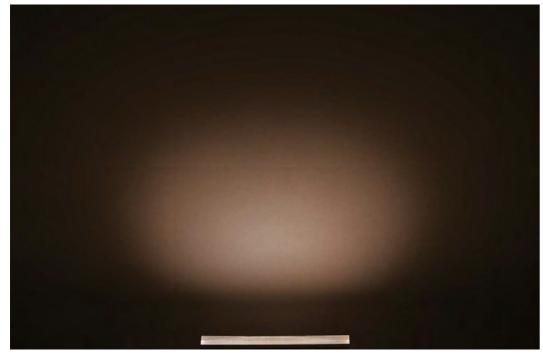



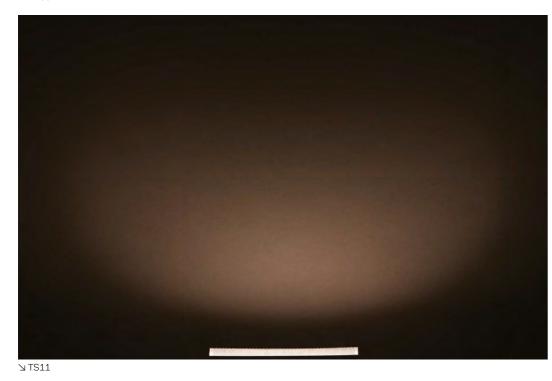


Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.




SHAPE OF LIGHT

::::.


F-System





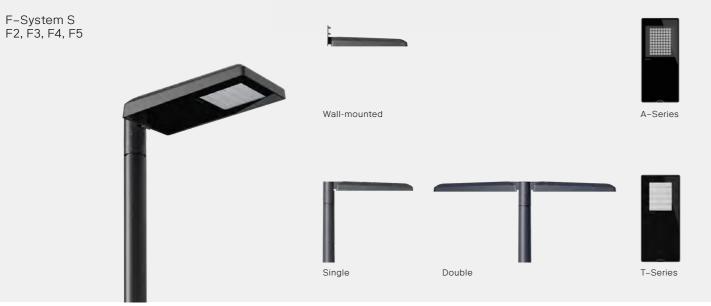



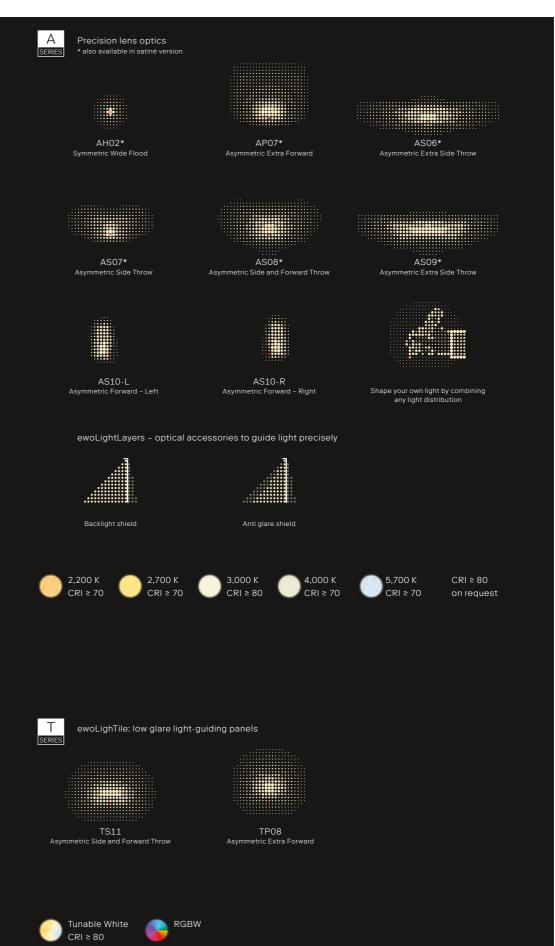



Control protocols

ON/OFF	OFF
DALI 2	DALI
1–10 V	+ 1–10V
ewo connexx	$\times\!\!\times\!\!\times$
Zhaga Book 18	Z
Line Switch	LS

Programming options

CLO	Constant Lumen Output
AC/DC	Emergency power supply



Stand-alone



Control protocols

DALI 2 T8



Night dimming



F-System M



F6/F8/F10

6-10 lighting units

Housing

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall, bracket
Pole adapter	Aluminum, fixed position, 90° for pole-top Ø89 mm, Ø114 mm or Ø133 mm (single or double design)

^{*} other color on request

F6/F8/F10

6-10 lighting units

Measurements

Model	LPH [m] ①	J @	→ [~ ③	Weight [kg] @
F6	4-10	0.29	0.07	14.2
F6-W	/	0.27	0.05	13.9
F8	4-10	0.29	0.07	14.4
F8-W	/	0.27	0.05	14.1
F10	4-10	0.29	0.07	14.6
F10-W	/	0.27	0.05	14.3
	① in 1 m steps	@ projecte	d windage area [m	1 ²]

3 lateral windage area [m²]


⊕ With pole adapter/fixing bracket without power cable (Pole adapter Ø76 fix 1.2 kg/ fixing bracket (-W) 0.9 kg)

Electrical	A-Series	T-Series
Protection class	1/11	1
Voltage [V], [Hz]	220-240, 50/60	220–240, 50/60
Current feed max. [mA]	650*	225
LED power max. [W]	295	119
•••••	* F10 max. 600 mA	•

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	

Driver	A-Series	T-Series	
Control options	ON DALI 1-10V XX Z L/S	T8 DALI	
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		······································
Software	connexx light management software for remote management		

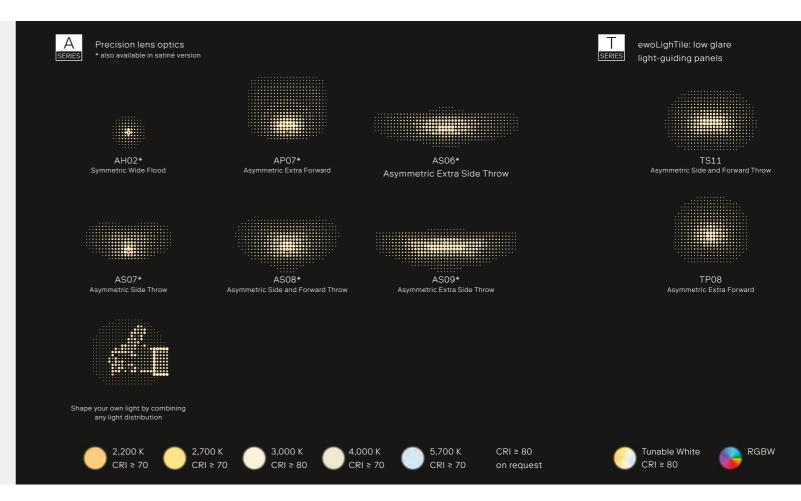

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	TS11	TP08
MacAdam ellipses (SDCM)			≤ 5 S	SDCM			≤ 5 SD(CM


Model	F6/-W	F8/-W	F10/-W	F6/-W	F8/-W	F10/-W
Light units	6	8	10	6	8	10
Luminous flux [lm]	5,700-21,900	7,500-29,200	9,400-34,200	5,500	7,300	9,100

Accessories Pole bracket variants ewoLightLayers (optical accessories)



Single







Fixed 90° pole-top

Bracket

Available designs

Double



Wall-mounted



Glass cover can be opened without tools

83

Glass cover

82 1st edition, October 2023; Copyright: © ewo srl/GmbH ewo.com

^{**} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance



F-System S



F2/F3/F4/F5

2-5 lighting units

Housing

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top Ø89 mm, Ø114 mm or Ø133 mm (single or double design)
•••••	* other color on request
	** ewo three steps process (high quality alloy, pre-treatment, primer) to

ensure extreme corrosion resistance

F2/F3/F4/F5

2-5 lighting units

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220–240, 50/60
Current feed max. [mA]	700*	225
LED power [W]	147	60
	* F5 max. 600 mA	

Measurements

Model	LPH [m] ①	↓ ^ ②	→ ਼ ③	Weight [kg] @
F2	4-10	0.19	0.07	10.8
F2-W	/	0.18	0.04	10.5
F3	4-10	0.19	0.07	11.0
F3-W	/	0.18	0.04	10.7
F4	4-10	0.19	0.07	11.2
F4-W	/	0.18	0.04	10.9
F5	4-10	0.19	0.07	11.4
F5-W	/	0.18	0.04	11.1
① in 1 m steps		@ projecte	d windage area [m	2]


3 lateral windage area [m²]

@ With pole adapter/fixing bracket without power cable (Pole adapter Ø76 fix 1.2 kg/ fixing bracket (-W) 0.9 kg)

Operating conditions

Lifetime	Visit the configurator for speci	fic lifetime options

Driver	A-Series	T-Series	
Control options	ON DALI 1-10V XX Z YS	T8 DALI	
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		······································
Software	connexx light management software for remote manage	nent of intelligent luminaire clusters	

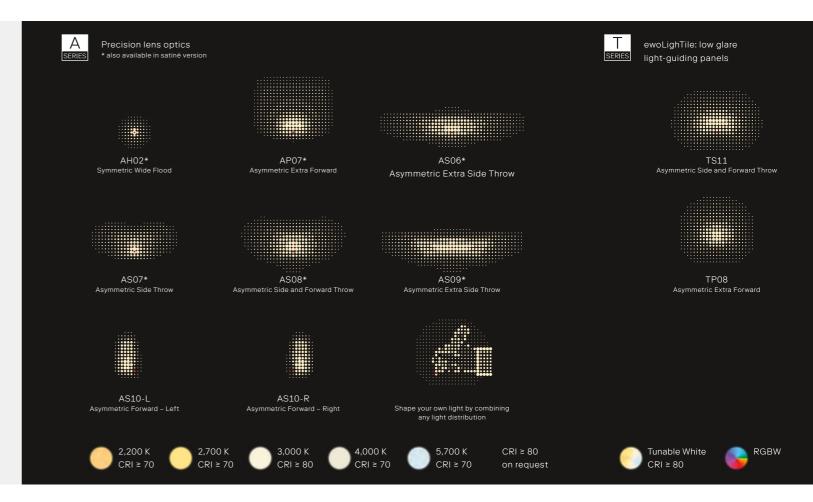


Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 S	DCM

Model	F2/-W	F3/-W	F4/-W	F5/-W	F2/-W	1 07 11	F4/-W	F5/-W
Light units	2	3	4	5	2	3	4	5
Luminous flux [lm]	1,900-8,400	2,900-12,000	3,800-15,500	4,700-17,100	1,800		3,600	4,600

Accessories Pole bracket variants ewoLightLayers (optical accessories)









Fixed side-entry



85

Available designs






Glass cover

Glass cover can be opened without tools



F-System XS



Large area and street lighting







Configurator



Housing







Measurements

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole Adapter	Aluminum, fixed position, 90° for pole-top \varnothing 42 mm, \varnothing 48 mm, \varnothing 60 mm, \varnothing 89 mm, \varnothing 114 mm or \varnothing 133 mm (single or double design) / fixed position, 0° for pole-top \varnothing 42 mm, \varnothing 48 mm or \varnothing 60 mm / adjustable in 5° increments from 0–90°, for pole-top \varnothing 76 mm or \varnothing 60 mm
	* other color on request ** ewo three steps process (high quality alloy, pre-treatment, primer) to

ensure extreme corrosion resistance


Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220–240, 50/60
Current feed max. [mA]	700*	225
LED power [W]	145	60
	* F3-XS 650 mA	•

modedicinon				
Model	LPH [m] ①	1 2	→_^^ 3	Weight [kg] @
F1-XS	3-6	0.13	0.05	7.9
F1-XS-W	/	0.11	0.03	7.6
F2-XS	3-6	0.13	0.05	8.1
F2-XS-W	/	0.11	0.03	7.9
F3-XS	3-6	0.13	0.05	8.3
F3-XS-W	/	0.11	0.03	8.1
	① in 1 m steps	② projected wir	ndage area [m²]	
		3 lateral windag	ge area [m²]	

 \odot With pole adapter/fixing bracket without power cable (Pole adapter Ø76 fix 1.2 kg/ fixing bracket (-W) 0.9 kg)

Operating conditions Lifetime Visit the configurator for specific lifetime options

Driver	A-Series	T-Series
Control options	ON DALI 1-10V XX Z US	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote management of intelli	

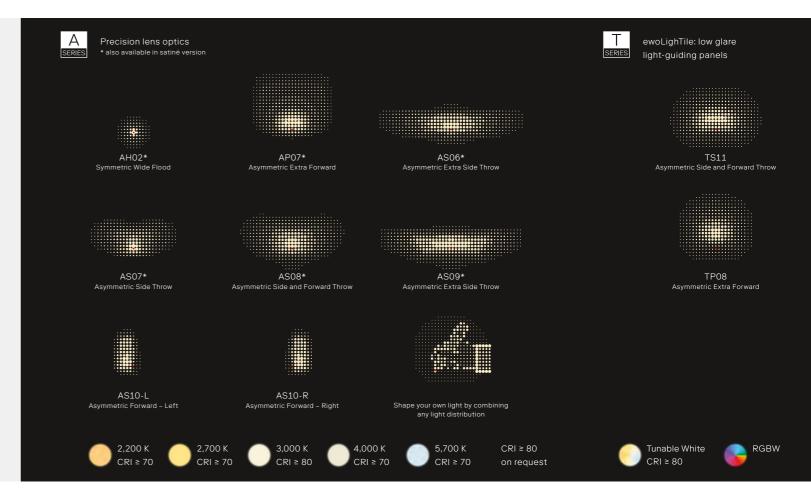


Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	Т	S11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM					≤ 5 SD	CM

Model	F1-XS/-W	F2-XS/-W	F3-XS/-W	F2-XS/-W	F3-XS/-W
Light units	1	2	3	2	3
Luminous flux [lm]	1,000-4,200	1,900-8,400	2,900-12,000	1,800	2,700

Accessories Pole bracket variants ewoLightLayers (optical accessories)











Fixed side-entry



Available designs






Glass cover



Glass cover can be Bolted glass cover opened without tools

86 87 1^{st} edition, October 2023; Copyright: © ewo srl/GmbH ewo.com



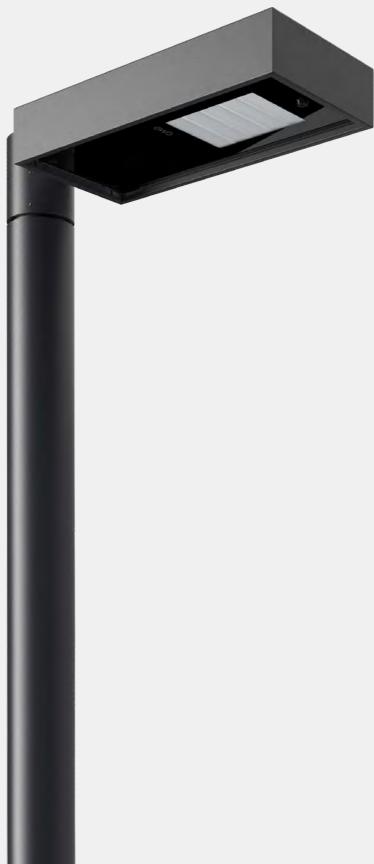





AREA HIGH BAY WALKWAYS

FO

The FO family of pole and wall mounted luminaires is available with either A-Series high precision lens optics for static white applications or T-Series low glare ewoLightTile for tunable white configurations.

ewo.com


Intelligence of Light



The body of the FO luminaires can house up to 5 light units, providing various light distributions for area, high bay, street or walkway lighting. Pole and wall mounted luminaires are in two different sizes as FO420 and FO600 (optionally as a double head design available).

Smart Lighting control modules for different communication standards or external Zhaga interface can optionally be integrated into the luminaire, allowing it to join smart city networks.



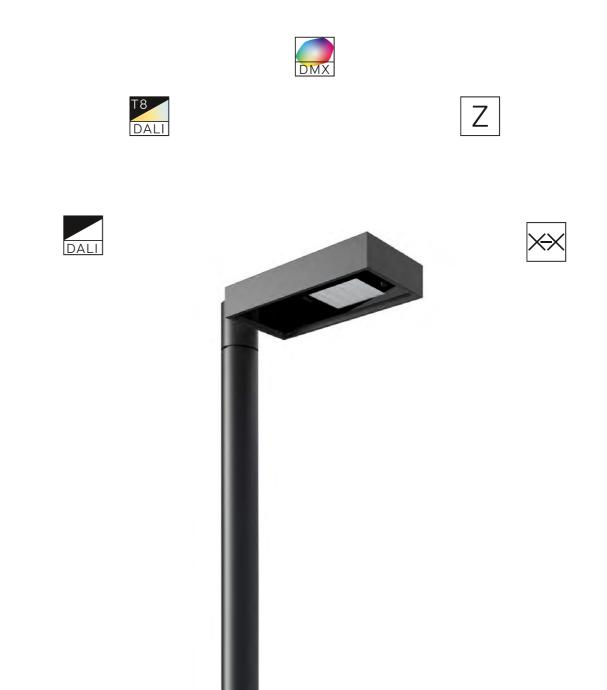

Shape of Light





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology


ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

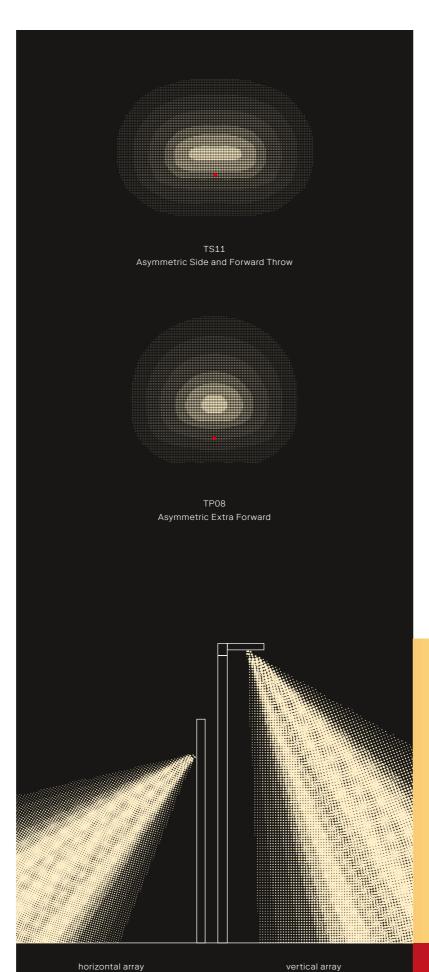


Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations


For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

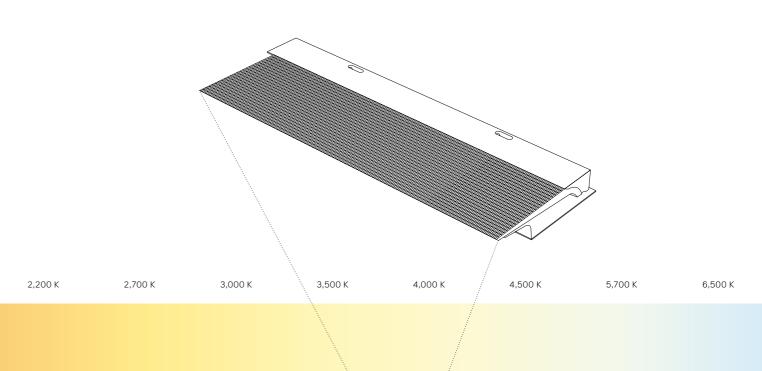


Tunable White CRI ≥ 80

luminous range: 3xLPH



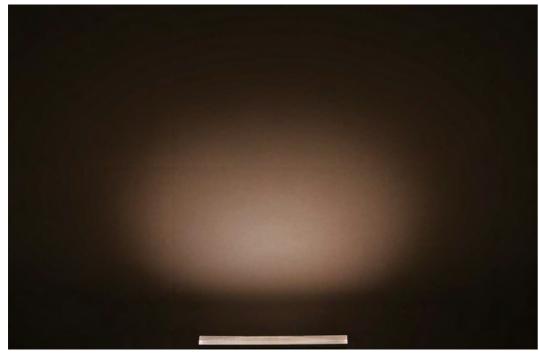



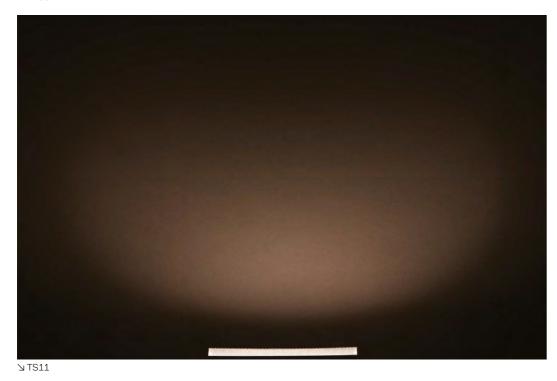

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



:::.








1-3 lighting units









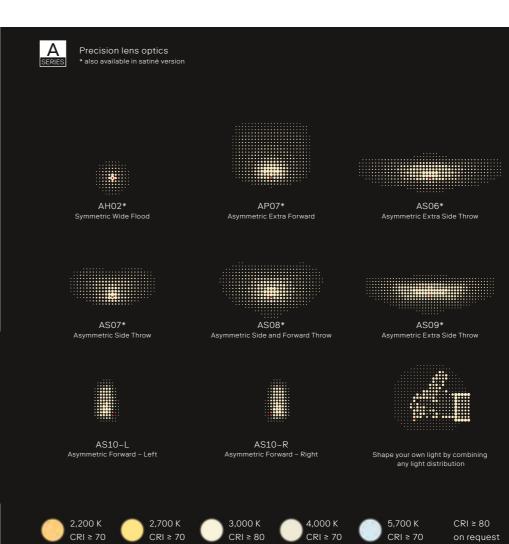



Control protocols

ON/OFF	OFF
DALI 2	DALI
1–10 V	1–10V
ewo connexx	$\times\!\!\times\!\!\times$
Zhaga Book 18	Z
Line Switch	L/S

Programming options

CLO	Constant Lumen Output
AC/DC	Emergency power supply

Stand-alone



Control protocols

DALI 2 T8



Programming options

Night dimming





3-5 lighting units





ewoLighTile: low glare light-guiding panels

FO600 FO600-W





2-3 lighting units

Housing

IP66 RoHS IK08

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top \varnothing 42 mm, \varnothing 48 mm, \varnothing 60 mm, \varnothing 76 mm, \varnothing 89 mm, \varnothing 114 mm or \varnothing 133 mm (single or double design), fixed position, 0° for pole-top \varnothing 42 mm, \varnothing 48 mm or \varnothing 60 mm, adjustable in 5° increments from 0 – 90° , for pole-top \varnothing 60 mm or \varnothing 76 mm
	* other color on request

1-3 lighting units

^{*} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	650	225
LED power max. [W]	95	36


Dimensions

Model	LPH [m] ①	1 2	→ ^ 3	Weight [kg]
FO420	3-10	0.11	0.06	11.0
FO420-W	/	0.12	0.05	10.0
•	① in 0.1 m steps	② projected wi	ndage area [m²]	······································
		3 lateral winda	ige area [m²]	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options

Driver	A-Series	T-Series	
Control options	ON DALI 1-10V XX Z Ly	T8 DALI	
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connexx light management software for remote manager		

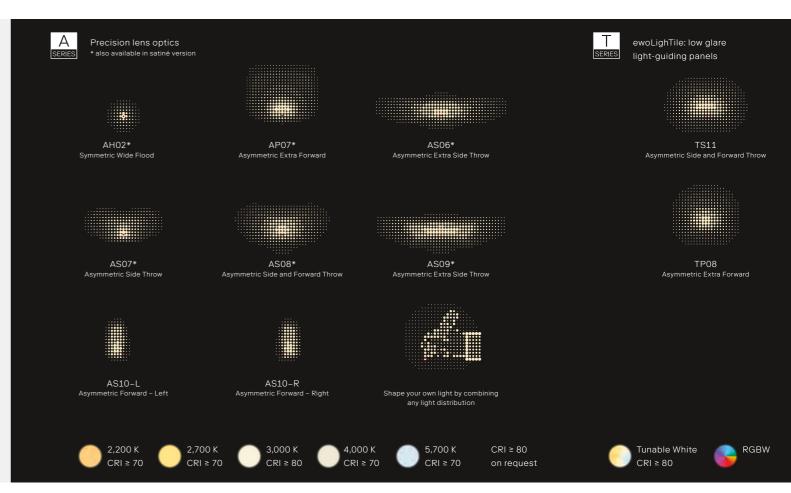


Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 SE	CM
•		•	•	•	•		•	• •		

Model	FO420/-W	FO420/-W
Light units	1-3	2-3
Luminous flux [lm]	1,000-10,900	1,800-2,700

Accessories Pole bracket variants ewoLightLayers (optical accessories)







Fixed 90° pole-top

Glass cover



Fixed side-entry



Available designs








Bolted glass cover Glass cover can be opened without tools

98 99 1st edition, October 2023; Copyright: © ewo srl/GmbH ewo.com



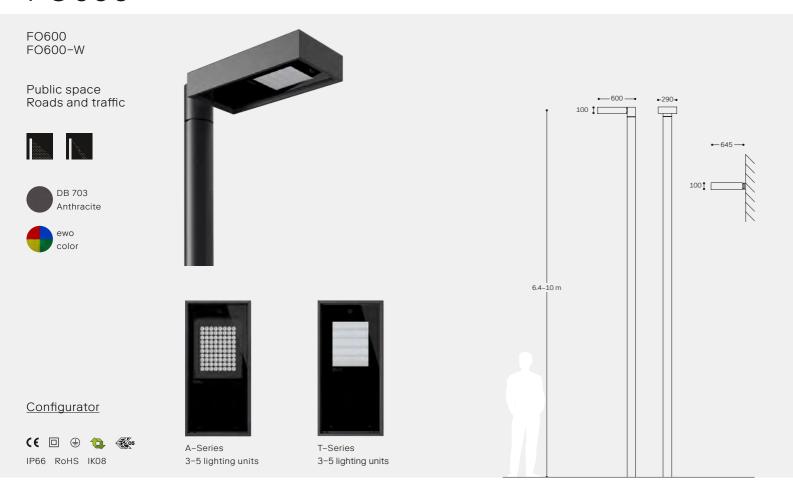

Housing

Housing material	Stainless steel
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top ø60 mm, ø76 mm, ø114 mm or ø133 mm (single or double design)
•••••	* other color on request

Measurements


Model	LPH [m] ①	↓ ° ②	→ ^ 3	Weight [kg]
FO600	6.4-10	0.19	0.08	17.0
FO600-W	/	0.18	0.06	18.0
	① in 0.1 m steps	② projected w	rindage area [m²]	
		3 lateral wind	age area [m²]	

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	550	225
LED power max. [W]	135	60
		60

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	. *

Driver	A-Series	T-Series
Control options	ON DALI 1-10VI XX Z YS	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote management of	intelligent luminaire clusters

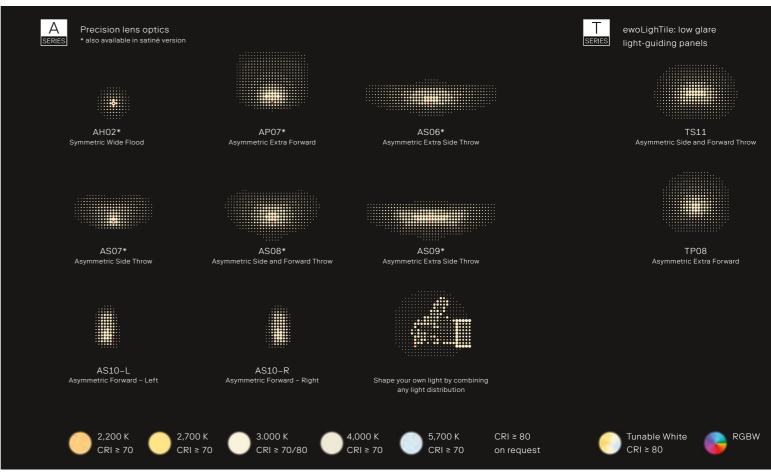


Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 SI	DCM

-		
Model	FO600/-W	FO600/-W
Light units	3–5	3-5
Luminous flux [lm]	2,900-15,900	4,600

Accessories Pole bracket variants ewoLightLayers (optical accessories)







Fixed 90° pole-top

Glass cover

Available designs





Glass cover with bayonet lock

100 101 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH

^{**} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance







PUBLIC SPACE ROADS AND TRAFFIC

FA


The FA family of products is a versatile lighting system available as pole mounted systems, bollards and wall luminaires, helping to create a consistent design language across urban spaces. The FA family utilises two main optical systems. High precision A–Series lenses ideal for applications including street, area, walkway lighting and pedestrian crossings. And T-Series lenses, also known as ewoLightTile, offering maximum visual comfort with LEDs hidden inside, making it ideal for vertical optic elements that sit in the pole of the FA luminaire. With tunable white options and smart control, the FA can significantly contribute to empowering wellbeing outdoors.




103 ewo.com



ewo.com

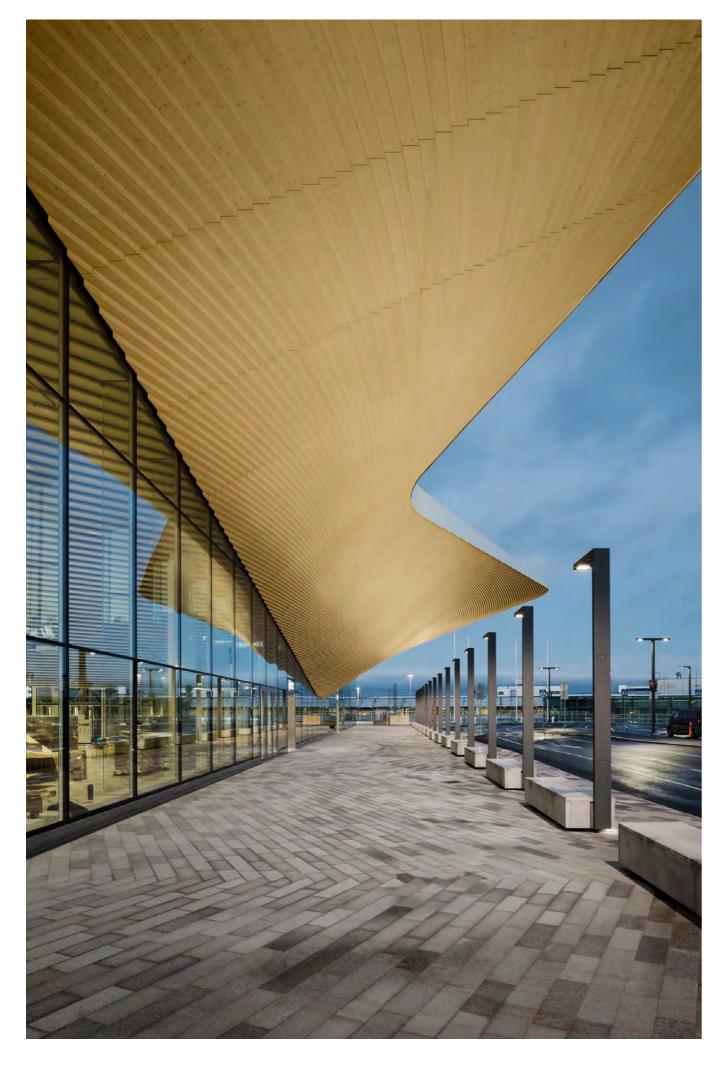

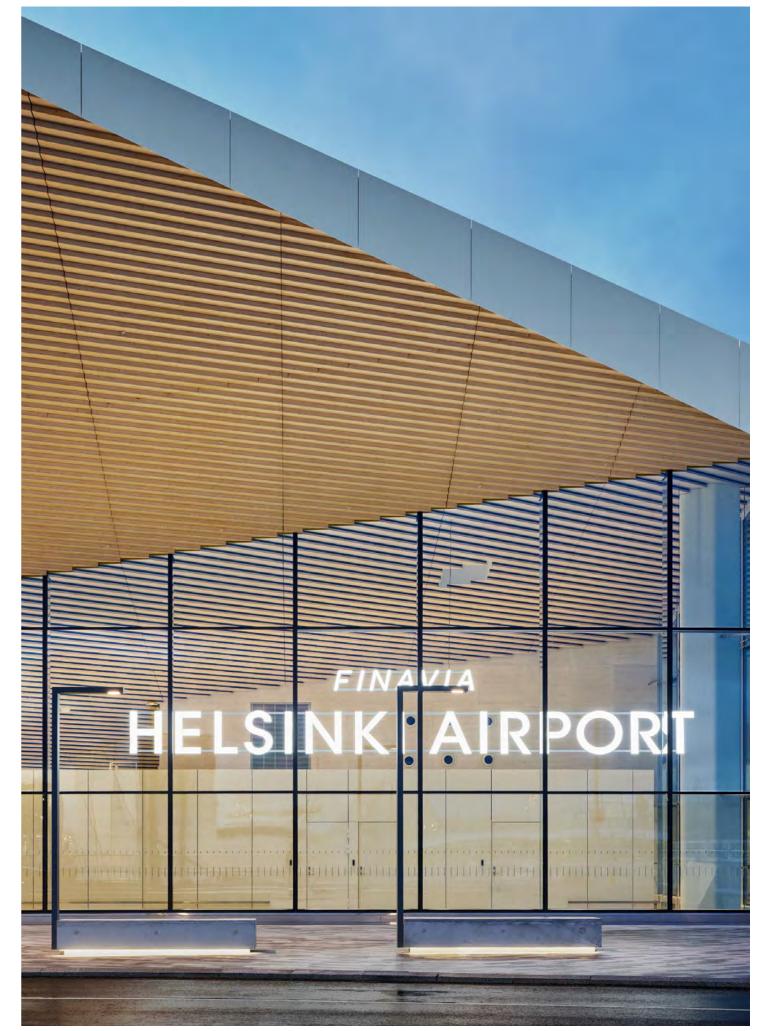


HELSINKI AIRPORT Helsinki, Finland, 2021

ewo.com

ALA Architects FA



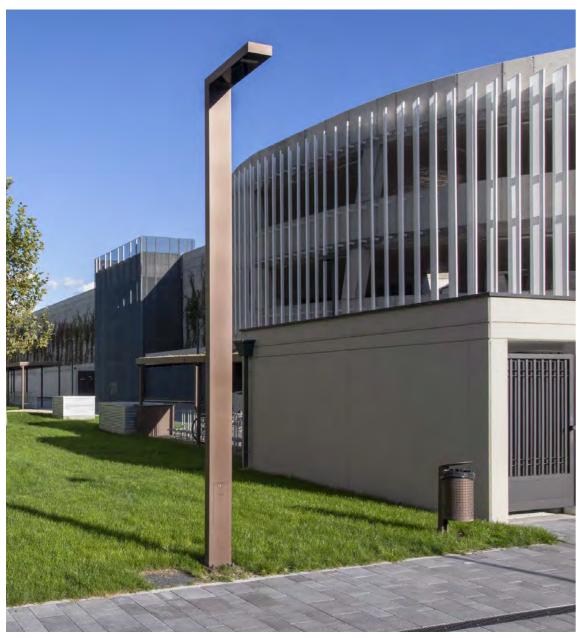


BÄCKEREI KASPROWICZ

Pahl, Germany, 2020

SL-Elektroplanung, Nürnberg – Lichttechnik, Johann Lichtl

FΔ

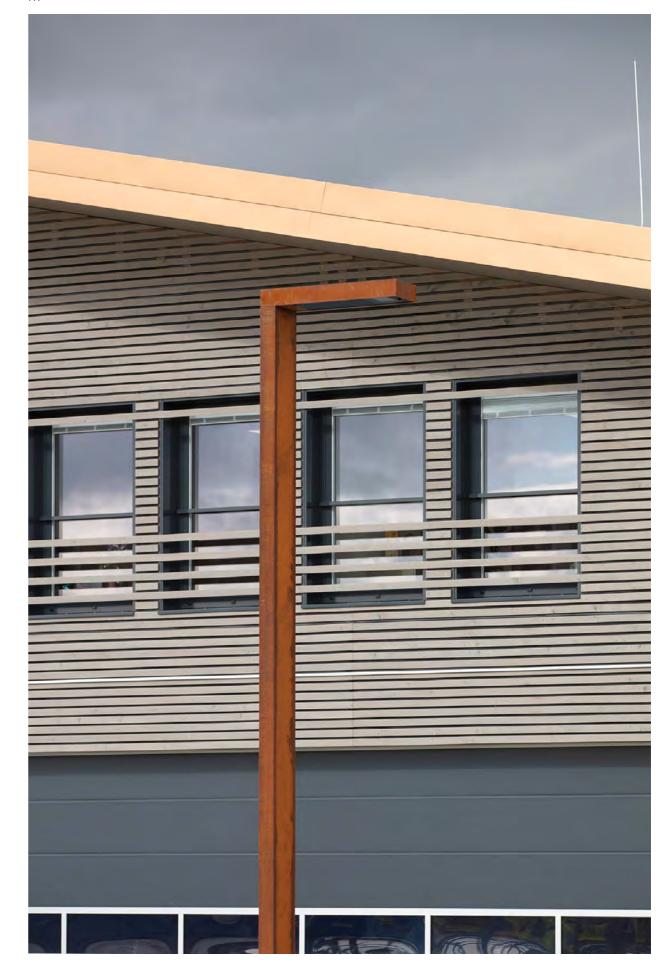

Body of Light



Skins + protection
With differnet finishes and materials FA
is prepared to match modern architecture and urban landscapes.



Forms + combinations
The design of the FA family pole luminaire allows for double or single variants.
Integration of an EL unit as vertical alignment is also possible.

















COR-TEN RAW STEEL

ewoECP

WALL DOWNLIGH FA100-WD

The clear design language has been extended to ceiling luminaires and wall luminaires and provides you with a wide range of elements that allow you to cover many areas of lighting planning in a coherent design with one family.

Protect and clothe your FA luminaire with rough COR-TEN, pure raw steel or with the internally developed ewoECP treatment for additional extra anti corrosion protection (ewoECP).

Shape of Light





PUBLIC SPACE AREAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology


ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

eed 100-350 mA

Power 9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

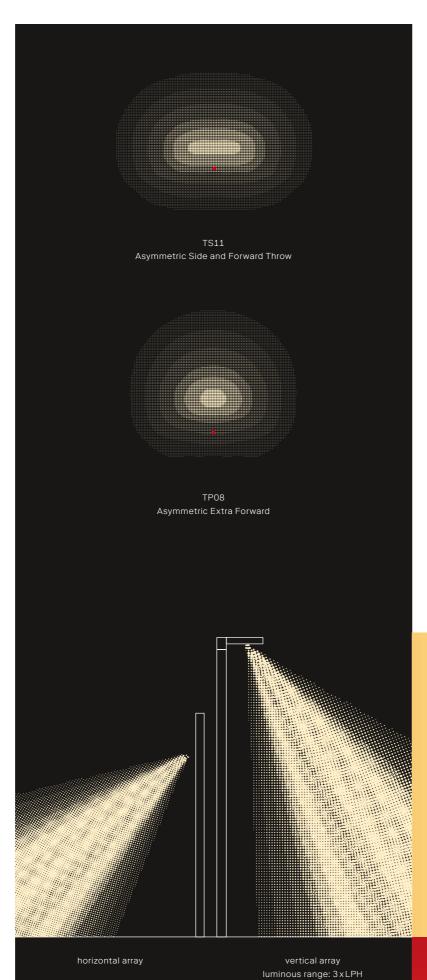


Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations

For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

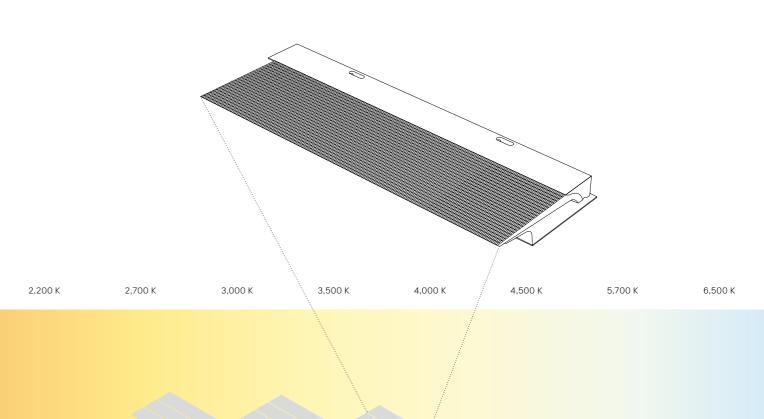


Tunable White CRI ≥ 80

RGBW







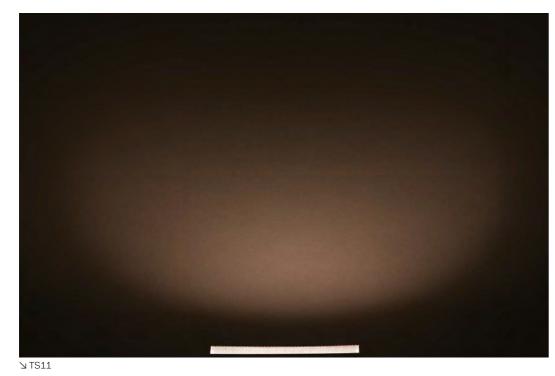

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



BODY OF LIGHT

SHAPE OF LIGHT *:::*:.

INTELLIGENCE OF LIGHT

FA770 FA770-W FA1070

FA170





A-Series

FA1070

5-6 LU

A-Series


FA770


1-4 LU







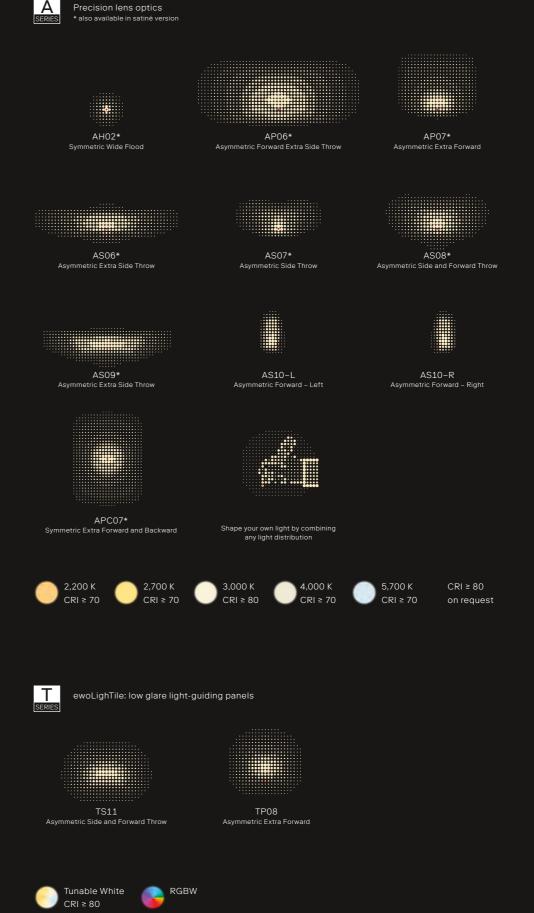





CLO Constant Lumen Output AC/DC Emergency power supply

Stand-alone

Line Switch

T SERIES

Control protocols

DALI 2 T8

Programming options

Night dimming



















Wall-mounted downlight







16 LEDs
















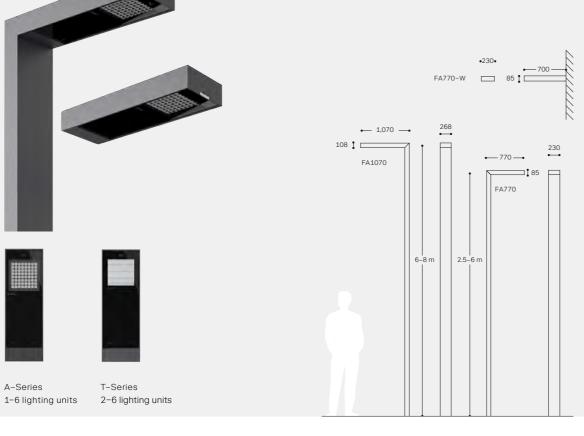

Housing

Extruded aluminium profile (optional COR-TEN steel)
Polyester powder coating (ewoECP upon request**)
Silver grey (RAL 9007 / DB 702)*
Safety glass (ESG)
Pole, wall
* other color on request

^{**} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance (except 1070)

Measurements

Model	LPH [m] ①	↓ ^ ②	→ 2 3	Weight [kg] ®
FA770	2.5-6	0.18	1.38	95.0*
FA770-W	/	0.16	0.06	14.5
FA1070	6-8	0.29	2.14	176.0**
	① in 0.5 m steps	② projecte	d windage area [m²]	® max. weight
			indage area [m²]	238 pole included


^{*} single version with aluminium pole LPH = 6 m and telescopic element with anchor cage

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	700*	225
LED power max. [W]	160	71
	* FA1070 max. 550 mA	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·

Driver	A-Series	T-Series
Control options	ON DALI 1-10V XX Z YS	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote manage	ment of intelligent luminaire clusters

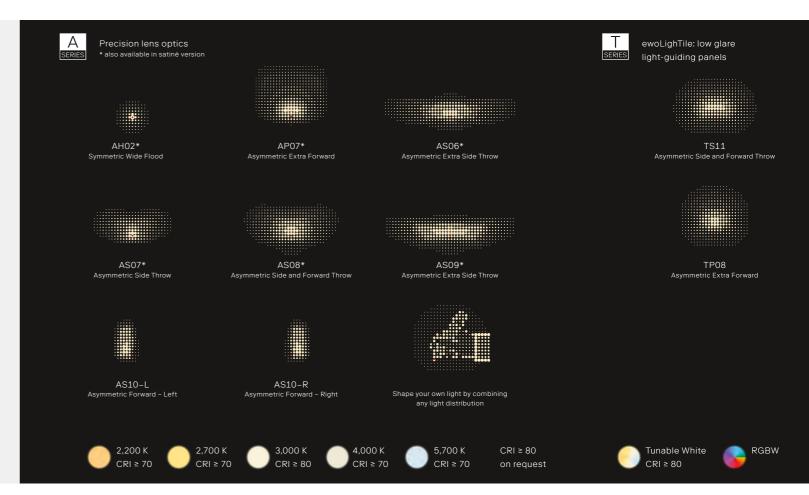

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R		TS11	TP08
MacAdam ellipses (SDCM)		≤ 5 SDCM					***************************************	•••••••••••••••••••••••	≤ 5 S	DCM	

Model	FA770/-W	FA1070	FA770/-W	FA1070
Light units	1-5	5-6	2-4	5-6
Luminous flux [lm]	1,000-18,800	4,700-19,100	4,100	5,500



^{**} single version with aluminium pole LPH = 8 m and telescopic element with anchor cage



BOLLARDS FA170

Pedestrian path Accent lighting



A-Series

FA170

8 LEDs

Configurator



IP66 RoHS IK09* *(IK10 on request, COR-TEN IK08)



Housing

Housing material	Aluminum die-cast* (A-Series: optional COR-TEN)
Housing finish	Polyester powder coating (ewoECP upon request***)
Finish standard colour	Silver grey (RAL 9007 / DB 702)**
Glass	Safety glass (ESG)
Mounting options	Pole
Installation	Gelbox for throughwiring upon request
	* pole made of extruded aluminium profile
	** other color on request
	*** ewo three steps process (high quality alloy pre-treatment primer) to

ensure extreme corrosion resistance

Measurements

Model	LPH [m] ①	J ° ②	→ [* 3	Weight [kg] ®
FA170	1	0.04	0.20	18.5*
FA170	1-4	0.04	0.80	46.5**
	1 in 0.5 m steps	② projected wir	ndage area [m²]	® max. weight
		3 lateral winda	ge area [m²]	236 pole included


^{*} single version with aluminium pole LPH = 1 m and buried base

Electrical A-Series T-Series Protection class 1/11 1/11 220-240, 50/60 220-240, 50/60 Voltage [V], [Hz] Current feed max. [mA] 500 225 LED power max. [W] 26 12

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	. *

Driver	A-Series	T-Series
Control options	ON DALI 1-10V JS	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote mana	

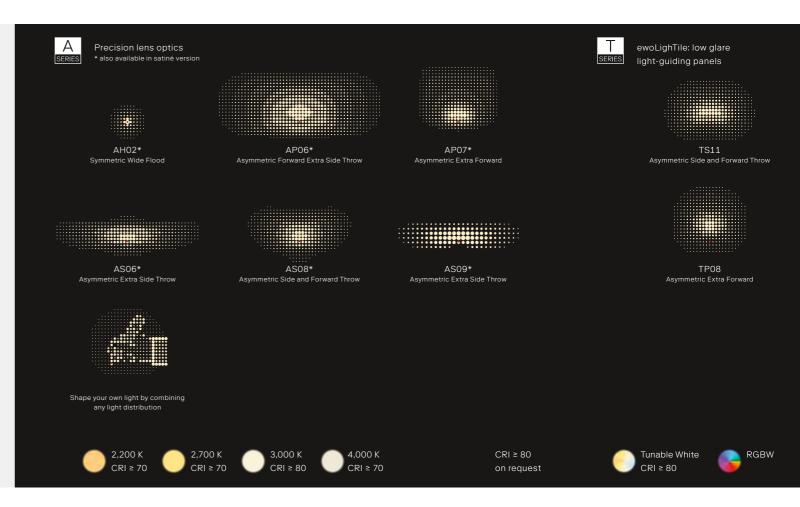


Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM		≤!	5 SDCM
•		•		• • • • • • • • • • • • • • • • • • • •		•		.

Model	FA170	FA170
Light units	1	1
Luminous flux [lm]	340-2,590	1,000










Anti-Glare Grid 60° / 70°

Available designs





Surface

Pole luminaire / bollard: polyester powder coated



Pole luminaire / bollard: COR-TEN steel

120 121 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH

^{**} single version with aluminium pole LPH = 4 m and buried base




WALL / CEILING FA100-C FA100-WD FA100-WU









Configurator



IP66 RoHS IK09*

A-Series FA100 8 LEDs





Housing

LED power max. [W]

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Silver grey (RAL 9007 / DB 702)*
Glass	Safety glass (ESG)
Mounting options	Wall, ceiling
Installation	Gelbox for throughwiring upon request
	* other color on request

Measurements

Model	LPH [m] ①	↓ ^ ②	→ ~ ③	Weight [kg] ®
FA100-WD	/	0.02	0.02	2.5
FA100-WU	/	0.02	0.02	2.5
FA100-C	/	/	0.02	2.5
		② projecte	d windage area [m²]	® max. weight
		3 lateral wi	ndage area [m²]	

other color of request	
ewo three steps process (high quality alloy, pre-treatment, primer) to	
ensure extreme corrosion resistance	


12

Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500	225

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
•	

Driver	A-Series	T-Series
Control options	ON DALI 1-10V S	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote management of intellige	nt luminaire clusters

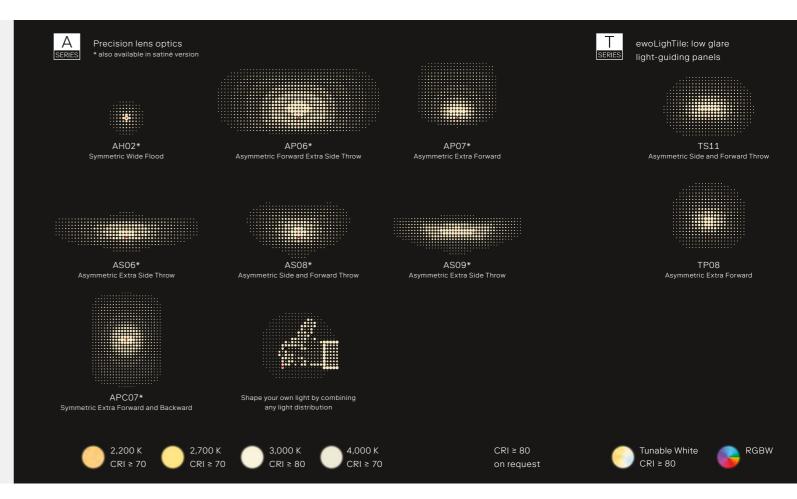

Performance

Optics	AH02	AP07	APC07	AS06	AS07	AS08	AS09	TS11	TP08
MacAdam ellipses (SDCM)					≤ 5 SDCM			 ≤ 5 S[OCM

Model	FA100-WD	FA100-WU	FA100-C	FA100-WD	FA100-WU	FA100-C
Light units	1	1	1	1	1	1
Luminous flux [lm]	315-3,250	315-3,250	420-3,300	1,000	1,000	1,000

Accessories ewoLightLayers (optical accessoires)







Anti-Glare Grid 60° / 70°

Available designs



ewo.com





C (Ceiling)

WD (Wall Downlight)

WU (Wall Uplight)

123 1st edition, October 2023; Copyright: © ewo srl/GmbH





PUBLIC SPACE ROADS AND TRAFFIC



Designed by Zurich based product designer Joerg Boner, the GO family of compact luminaires includes pole mounted and wall mounted systems featuring its signature curved luminaire body. To complement this curve, the GO luminaires are available with a curved safety glass, mirroring the shape of the body, and catching the light as it exits the luminaire, creating a visible sparkle. The safety glass can also be configured to be mounted flush to the luminaire, for enhanced light control and visual comfort. Available with A-Series high precision lens optics and controllable with DALI or 1–10 V, this luminaire is ideal for urban applications.











Jörg Boner working on the GO












Body of Light








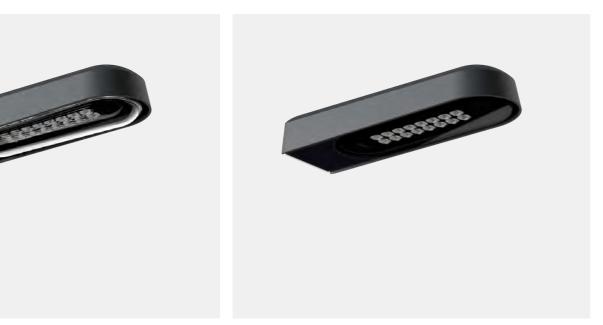










High qualityy optics

The GO family is compatible with A-Series precision lens optics and is the ideal choice for street and pavement lighting.



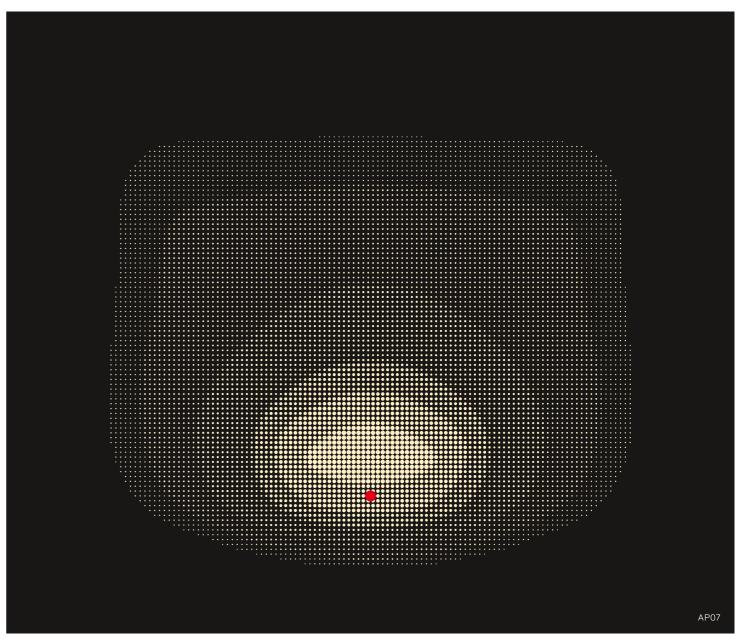


.::.


INTELLIGENCE OF LIGHT

POLE





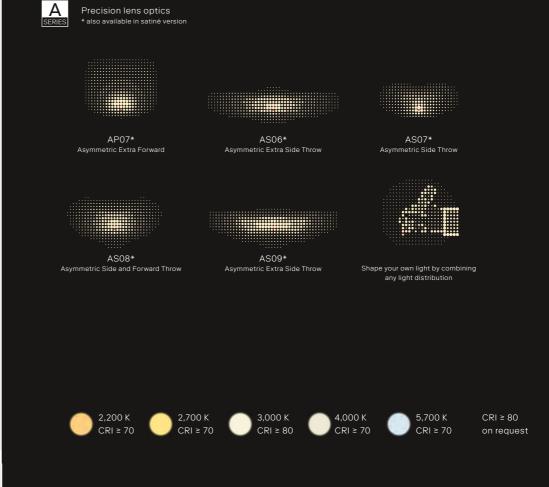



WALL



Curved cover



Single-pane safety glass



1 lighting unit

132 133 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH

Control protocols

A SERIES



POLE





Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating or vibratory-finished aluminum
Finish standard colour	Anthracite (DB 703)*
Glass cover	Safety glass (ESG) or curved cover
Mounting options	Pole
Pole adapter	ø 60mm, optional adapter for ø 76mm
	* other color on request

Measurements


Model	LPH [m] ①	J 2	→ 3	Weight [kg]
GO	3-6	0.05	0.03	6.5
GO-W	/	0.05	0.03	5.0
•••••	① in 0.5 m steps	② projected windage area [m²]		
		(3) lateral windage area [m²]		

Electrical	A-Series	
Protection class	1/11	
Voltage [V], [Hz]	220-240, 50/60	
Current feed max. [mA]	650	
LED power max. [W]	34	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options

Driver	A-Series
Control options	ON DALI 1-10V US
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone
Control accessories	Further accessories on request
Software	connexx light management software for remote management of intelligent luminaire clusters

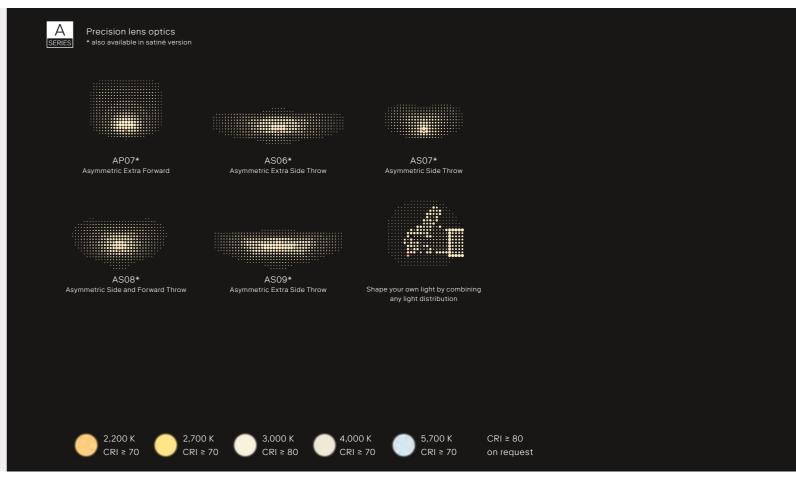

Performance

MacAdam ellipses (SDCM) ≤ 5 SDCM	


Model	GO	
Light units	1	
Luminous flux [lm]	900-3,500	

Accessories

ewoLightLayers (optical accessories)









Surface







Cover design



and pole, anthracite (DB 703)

Vibratory-finished aluminium housing, pole made from hot-dip galvanised steel

Curved cover

Single-pane safety glass



WALL GO-W

Area, street and walkway lighting











Configurator









GO 1 lighting unit

Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating or vibratory-finished aluminum
Finish standard colour	Anthracite (DB 703)*
Glass cover	Safety glass (ESG) or curved cover
Mounting options	Wall
Pole adapter	Ø60mm, optional adapter for Ø76mm
	* other color on request

Measurements


Model	LPH [m]	1 2	→ [* ③	Weight [kg]
GO-W	/	0.05	0.03	6.5
		② projected wir	ndage area [m²]	
		3 lateral winda	ge area [m²]	

Electrical	A-Series	
Protection class	1/11	
Voltage [V], [Hz]	220-240, 50/60	
Current feed max. [mA]	650	
LED power max. [W]	34	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	***************************************

Driver	A-Series
Control options	ON DALI 1-10V US
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone
Control accessories Software	Further accessories on request connexx light management software for remote management of intelligent luminaire clusters

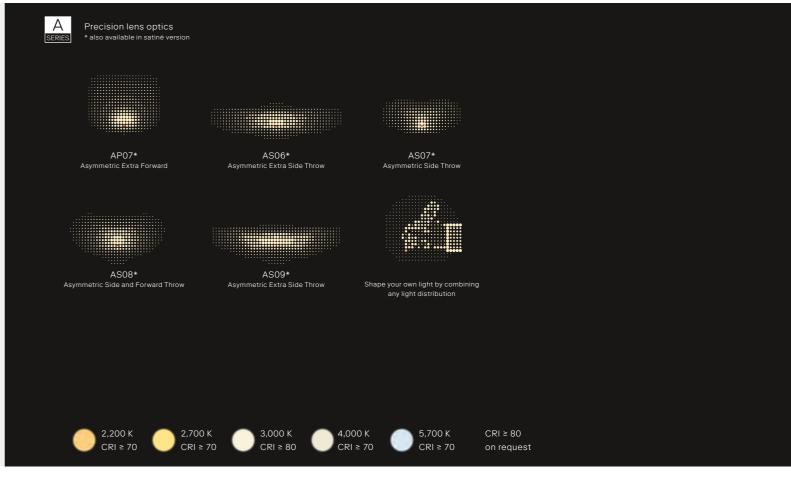

Performance


Optics	AP07	AS06	AS07	AS08	AS09	
MacAdam ellipses (SDCM)			≤ 5 SDCM			

Model	GO-W	
Light units	1	
Luminous flux [lm]	900-3,500	

Accessories ewoLightLayers (optical accessories)









Surface







Cover design



Polyester powder-coated housing and pole, anthracite (DB 703)

Vibratory-finished aluminium housing, pole made from hot-dip galvanised steel

Curved cover

Safety glass (ESG)

-377 **→**









ACCENTS BUILDINGS


CN

This circular pole top luminaire is ideal for urban lighting applications including area, street, walkway lighting and lighting of pedestrian crossings. Either two or four lighting units are symmetrically arranged in the luminaire head with the pole position at the centre. Optically, the CN can be configured with either A-Series high precision lens optics or T-Series low glare ewoLigthTile for tunable white applications bringing humancentric lighting to urban spaces.

139 ewo.com


PARCO PIAZZALE DEGLI ALPINI Bergamo, Italy, 2019 &GO Lighting Solutions CN

ewo.com

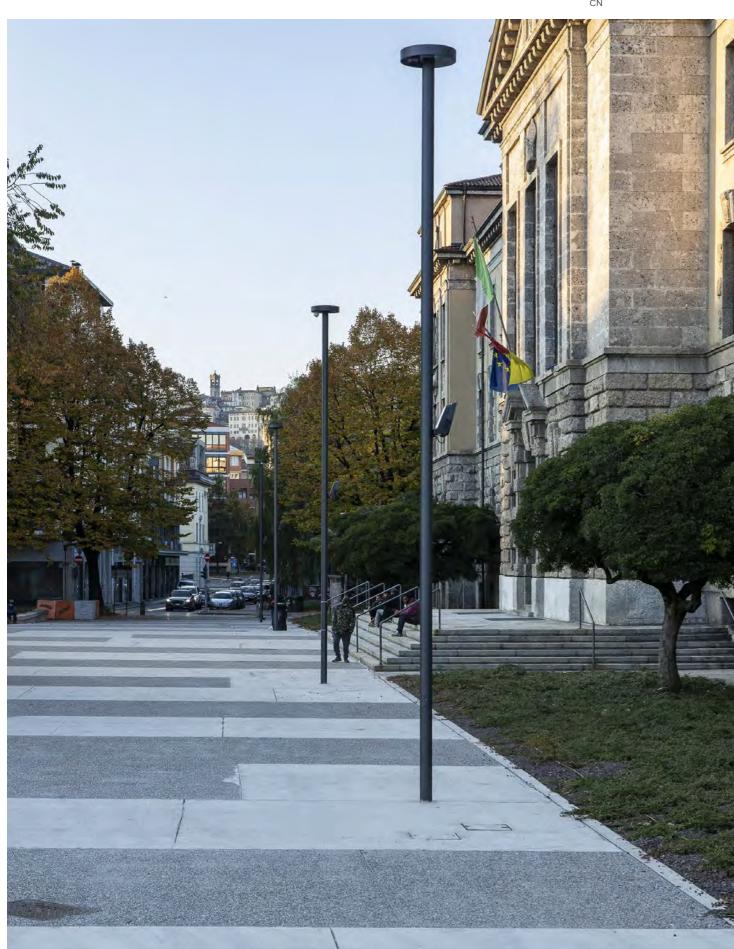

GEMEINDEKULTURZENTRUM ST. NIKOLAUS Ischgl, Austria, 2015 CN



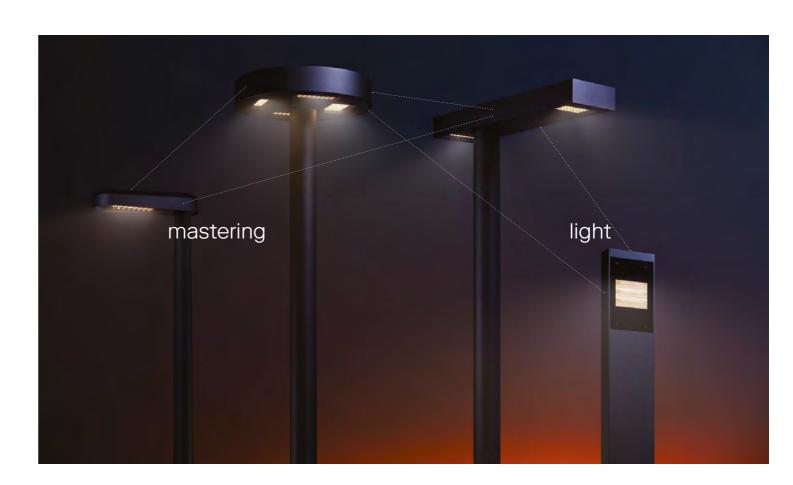

Shape of Light





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology


ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

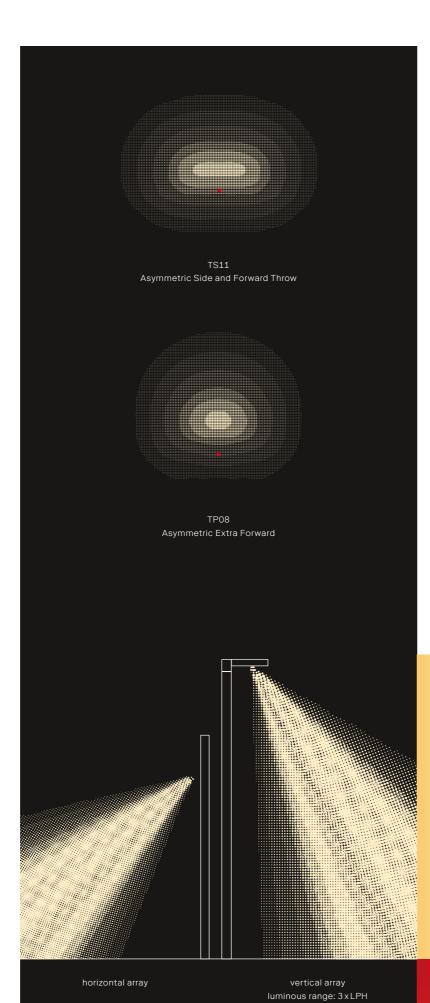


Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.


Modular Combinations

For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

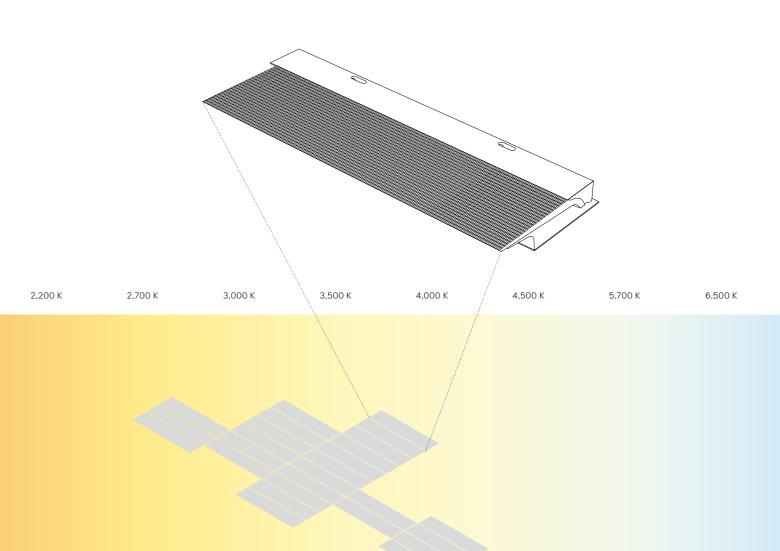


Tunable White CRI ≥ 80



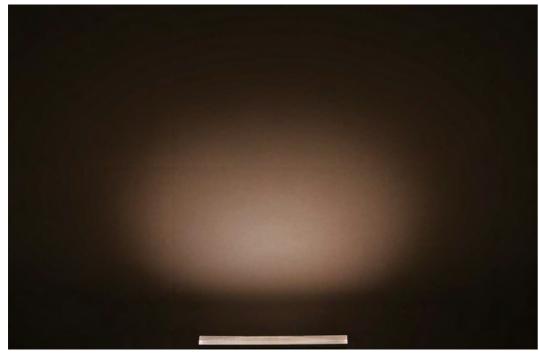

≽ TP08

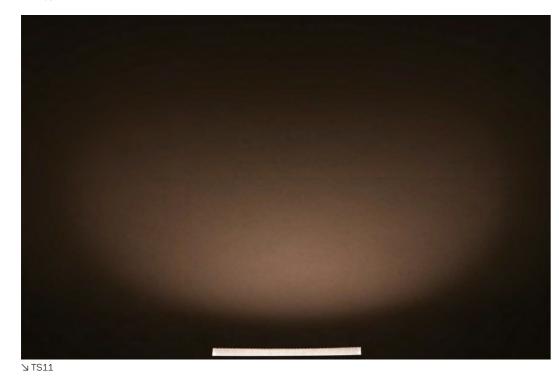

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



CN












1-4 lighting units












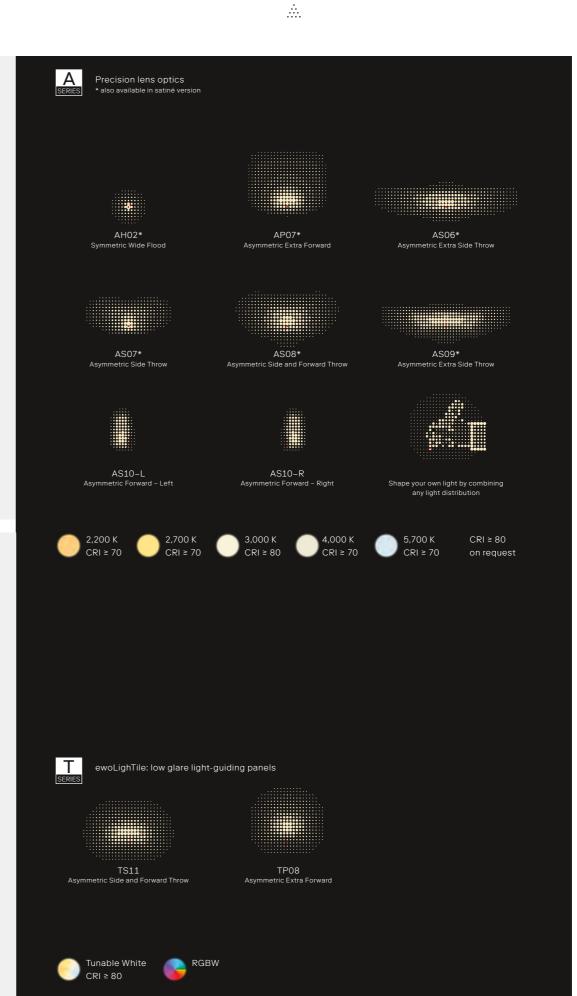



Control protocols

ON/OFF	OFF
DALI 2	DALI
L-10 V	1=10V
ewo connexx	$\times\!\!\times\!\!\times$
Zhaga Book 18	Z
ine Switch	LS

Programming options

CLO	Constant Lumen Output
AC/DC	Emergency power supply

Stand-alone

T SERIES

Control protocols

DALI 2 T8

Programming options

Night dimming

CN600





Public space Roads and traffic












IP66 RoHS IK10

Housing





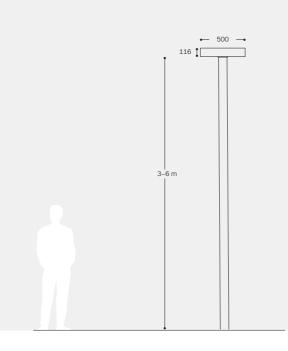

Measurements

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole
	* other color on request


** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance


Model	LPH [m] ①	J 2	→ ਼ ③	Weight [kg] ®	_
CN500	3-6	0.20	0.06	15.0	
	① in 0.1 m steps	② projecte	d windage area [m²]	® max. weight	
		3 lateral w	indage area [m²]	236 excluding pole	

Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500	225
LED power max. [W]	95	48

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·

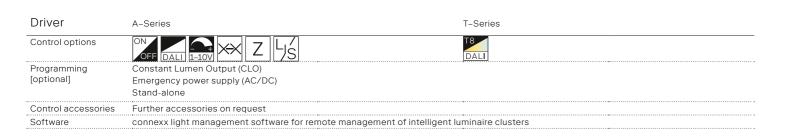

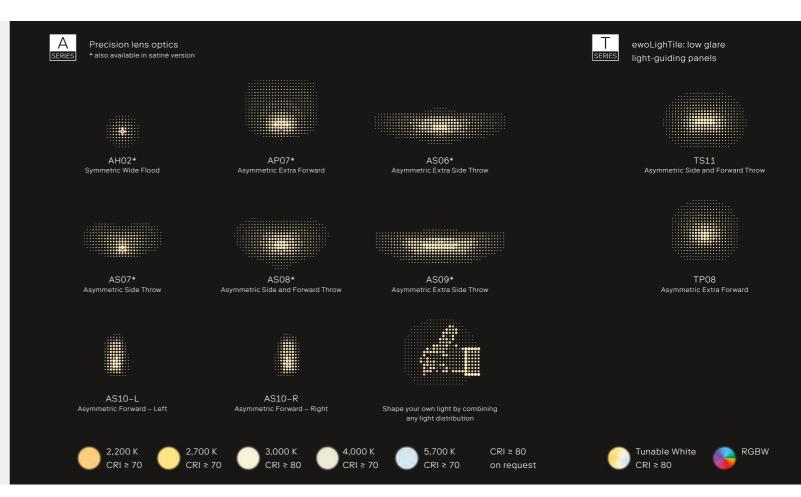

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS	11 1708
MacAdam ellipses (SDCM)		≤ 5 SDCM				***************************************	***************************************	≤ 5 SDCM		

Model	CN500	CN500
Light units	1-4	1-4
Luminous flux [lm]	1,000-11,200	3,600

Available designs (also available as pendant)






ewoLightLayers (optical accessories)









Pole luminaire

148 149 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH





Housing	
Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole
	* other color on request

* other color on request
** ewo three steps process (high quality alloy, pre-treatment, primer) to
ensure extreme corrosion resistance

Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500	225
LED power max. [W]	170	95

Operating conditions

Measurements

LPH [m] ①

① in 0.1 m steps

6-8

Model

CN600

Lifetime	Visit the configurator for specific lifetime options
•••••	

0.28

→ ③ 0.07

② projected windage area [m²]

3 lateral windage area [m²]


Weight [kg] ®

236 excluding pole

20.0

® max. weight

Driver	A-Series	T-Series
Control options	ON DALI 1-10V S	DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Software	Further accessories on request connexx light management software for remote management of intellig	

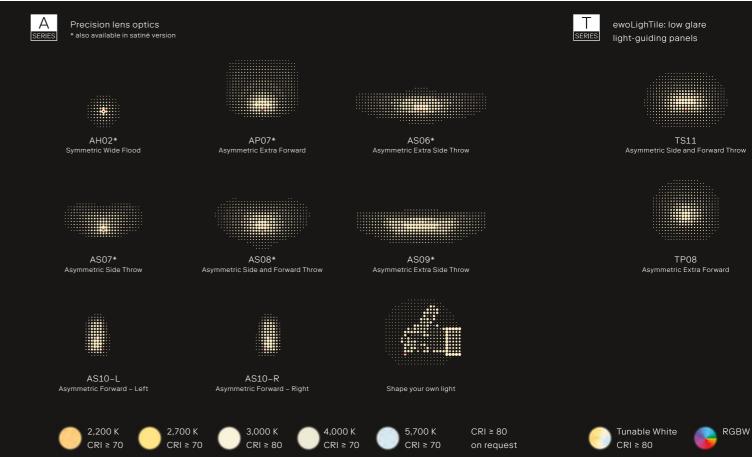

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 SI	DCM

Model	CN500	CN500
Light units	1-8	1-8
Luminous flux [lm]	1,000-19,700	7,300

Available designs (also available as pendant)






Backlight shield

Accessories





ewoLightLayers (optical accessories)



Pole luminaire

150 151 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH







ACCENTS BUILDINGS




Intelligence ready

The IR mast luminaires by Jörg Boner can be equipped with high-precision lens optics from the A series for static white colour temperatures as well as with ewoLightTiles for tunable white configurations. Its housing allows for the integration of nodes and sensors, making the IR intelligence ready and allowing it to integrate seamlessly into smart city systems whilst offering a high degree of control flexibility for its individual lighting units.



153 ewo.com













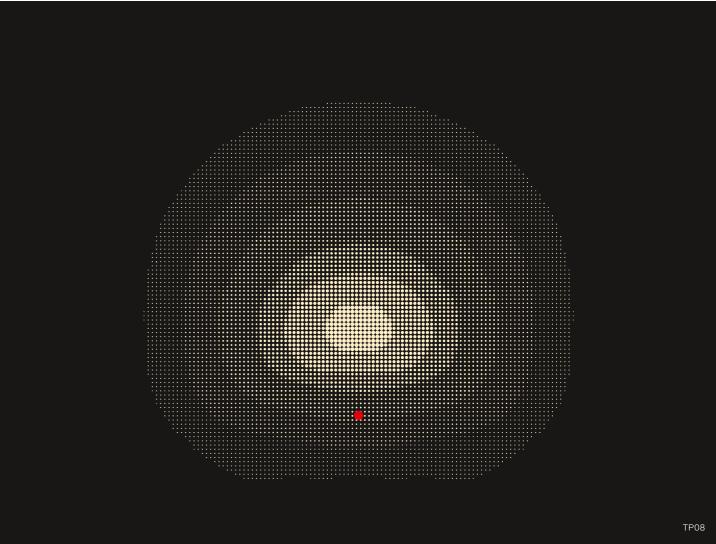

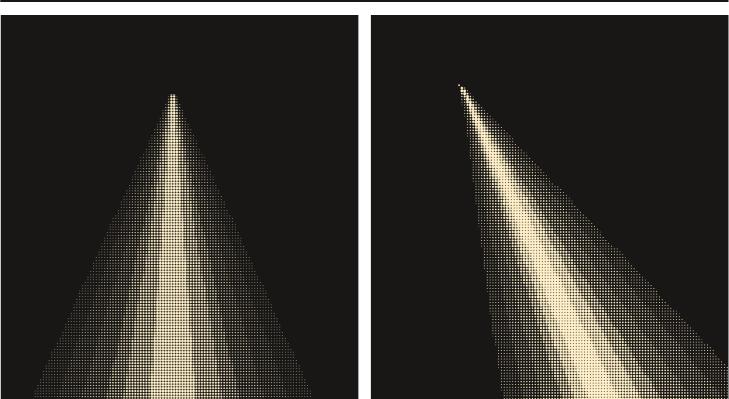



PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology

ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile Asymmetric Side and Forward Throw TP08 Asymmetric Extra Forward


horizontal array

Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations


For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

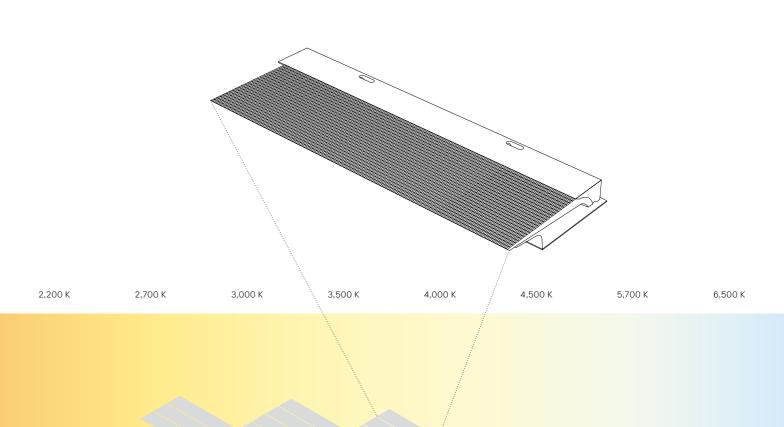


Tunable White CRI ≥ 80

vertical array luminous range: 3xLPH



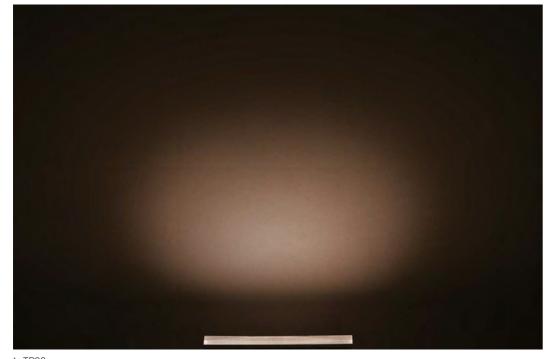



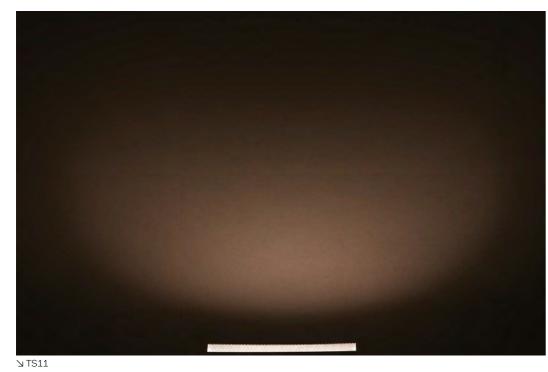

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



Intelligence of Light







 $\widehat{\ldots}$










Play with colour
Cityscapes are being transformed
every day in the pursuit to creating
dramatic spaces and enticing city
centres. Controlling dynamic lighting solutions with DALI T8 will enable scene setting, automated lighting adjustment and an introduction
to circadian lighting during the
hours of darkness.

With DALI, 1–10 V and stand alone line switch control, IR can easily be controlled to maximise both safety and energy saving.



Designed by Zurich based product designer Joerg Boner, the IR is a family of pole mounted luminaires with either a single or a twin head. The luminaire itself makes for an elegant appearance with its integrated luminaire and pole connection.

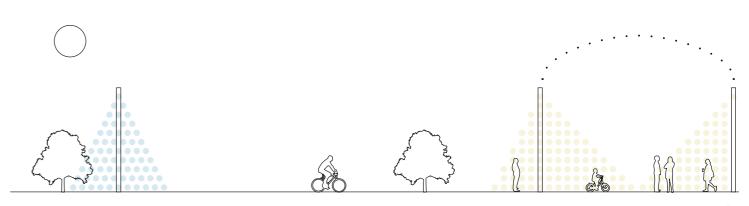

160 <u>ewo.com</u>

ewoECP Extreme Corrosion Protection



Four steps to optimise corrosion protection:

- 1) Corrosion resistant alloy ewo luminaires are produced with a high-quality, low copper-aluminium alloy to guarantee high-end mechanical and anti-corrosion properties.
- 2) ewoECP pre-treatment After a detailed cleaning process, a Cr6-free film is applied to ensure complete adhesion of the following layer.
- 3) ewoProtectiveLayerECP
 A proprietary coating prevents delamination, blistering and cracking of the protective layer, even after accidental damage. This way, extreme corrosion resistance can be achieved.
- 4) High-quality powder coating
 A high-quality coating performed inhouse with thermosetting powders delivers customer desired colours with the
 serenity of a superior performance
 against corrosion.



ewoECP areas of application


Outdoor: coastal and offshore areas with high salinity

Indoor: buildings or areas with almost permanent condensation with high pollution

164





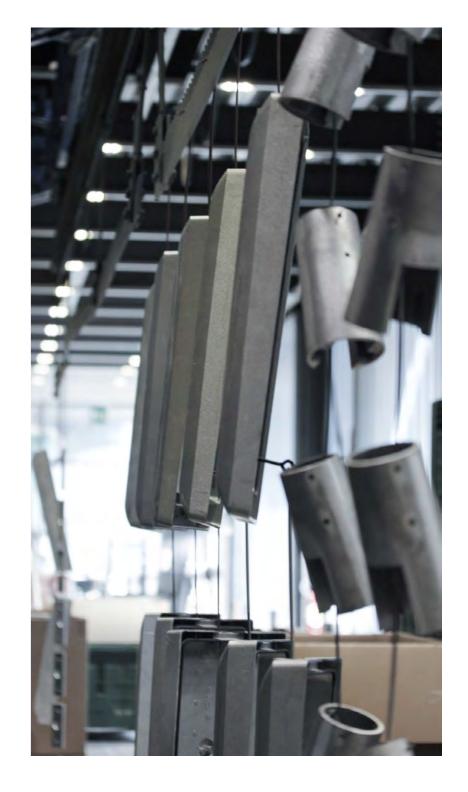

ewoECP performance

- No blistering around scribe >1000 h* (AUS & NZ common requirement)
- No other corrosion defects such as blistering and adhesion >2500 h*
- Comparable to the IM3 corrosivity category (suitable for buried tanks)
- SASO compliance

ewo.com

^{*} testing process: ISO9227 salt spray test

BODY OF LIGHT

SHAPE OF LIGHT

AS06*

etric Extra Side Throw

::::.

AP07*

INTELLIGENCE OF LIGHT

Control protocols

ON/OFF

DALI 2

1-10 V

ewo connexx

Zhaga Book 18

Programming options

CLO Constant Lumen Output

AC/DC Emergency Power Supply

Line Switch

Stand-alone

A SERIES



POLE IR1, IR2, IR3





A-Series IR1, IR2, IR3 1-3 lighting units



T-Series IR2, IR3 2-3 lighting units





Precision lens optics

AH02*



Control protocols

DALI 2 T8

DALI
1-10V
XX
Z
L/S

Programming options

Night dimming










T-Series IR2, IR3 2-3 lighting units

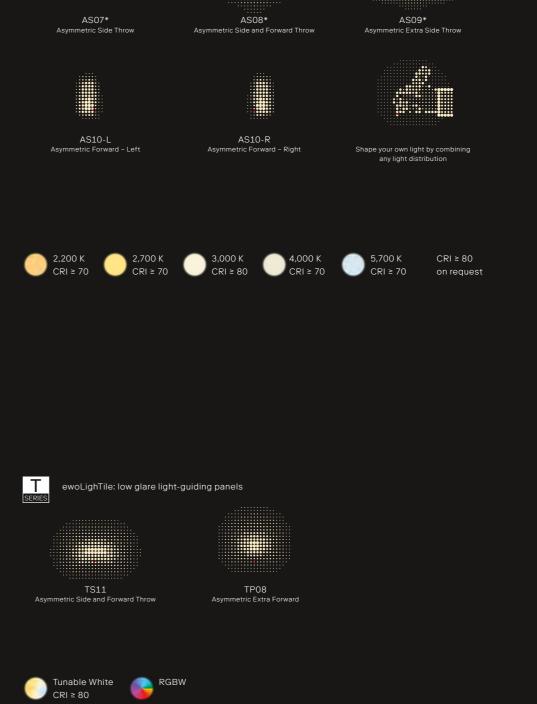

WALL

IR1-W, IR2-W, IR3-W





Area, street and walkway lighting







Configurator





Housing

Housing material

Mounting options

Housing finish

Pole adapter

Glass





Measurements

Model	LPH [m] ①	J 2	→ ° ③	Weight [kg] ®
IR1	3-6	0.12	0.03	6.5
IR2	3-6	0.12	0.03	6.5
IR3	3-6	0.12	0.03	6.5
	① in 0.5 m steps	② projecte	d windage area [m²]	® max. weight
		③ lateral w	indage area [m²]	236 excluding pole

- 528 **-**

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220–240, 50/60
Current feed max. mA	700*	225
LED power max. [W]	95	36
	* IR3 max. 650 mA	•

Polyester powder coating (ewoECP upon request**)

Integral pole adapter, for pole-top $\varnothing\,60$ mm and $\varnothing\,76$ mm

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Aluminum die-cast

Safety glass (ESG)

* other color on request


Finish standard colour Anthracite (DB 703)*

Pole

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•••••	······································



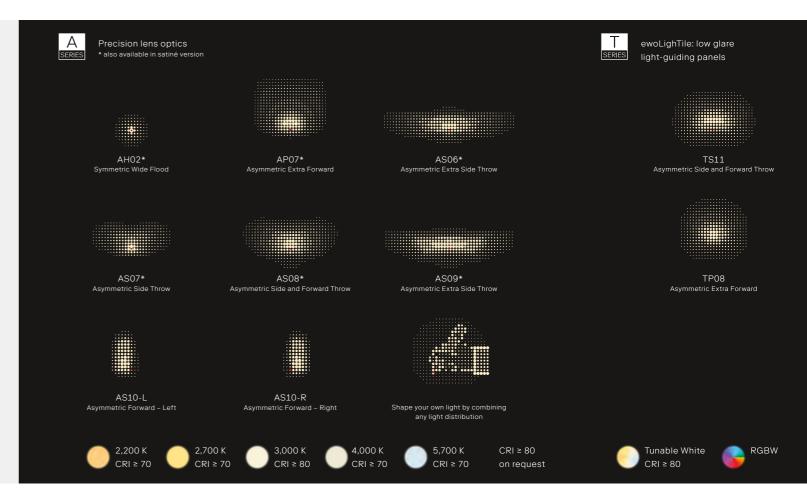

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	Т	S11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM					≤ 5 SD	CM

Model	IR1	IR2	IR3	IR2	IR3
Light units	1	2	3	2	3
Luminous flux [lm]	1,000-3,800	1,900-7,700	2,900-10,900	1,800	2,700

Accessories ewoLightLayers (optical accessories)







Available designs

Single



Double







Glass cover can be opened without tools

Bolted glass cover

168 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH



WALL IR1-W, IR2-W, IR3-W

Area, street and walkway lighting

















Configurator

Housing

Glass

Housing material

Mounting options

Housing finish



A-Series IR1, IR2, IR3 1-3 lighting units

Polyester powder coating (ewoECP upon request**)

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

T-Series IR2, IR3 2-3 lighting units

Measurements

Model	LPH [m]	↓ 2	→ ਼ ③	Weight [kg] ®	
IR1-W	/	0.12	0.04	10.0	
IR2-W	/	0.12	0.04	10.0	
IR3-W	/	0.12	0.04	10.0	
		② projected	d windage area [m²]	® max. weight	
		3 lateral wi	indade area [m²]		

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	700*	225
LED power max. [W]	95	36
•••••	* IP3 may 650 mA	***************************************

Aluminum die-cast

Safety glass (ESG)


* other color on request

Finish standard colour Anthracite (DB 703)*

Wall

Lifetime	Visit the configurator for specific lifetime options

Driver	A-Series	T-Series
Control options	ON DALI 1-10V XX Z Ly	DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote management of intell	igent luminaire clusters

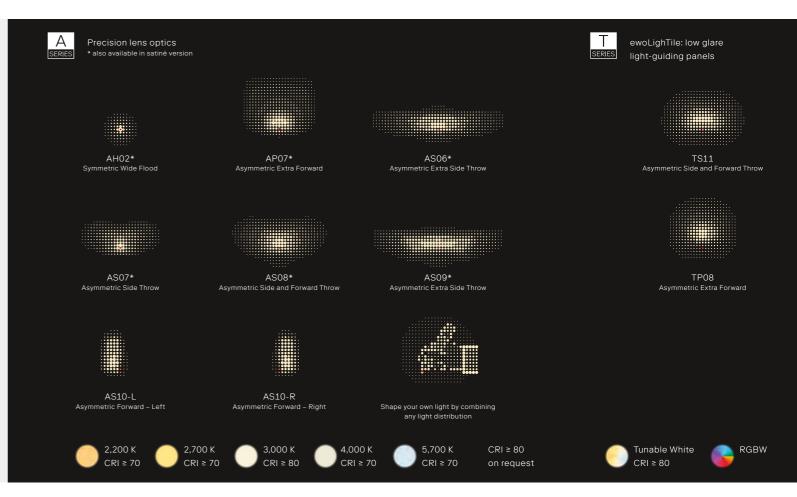


Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 SI	DCM

Model	IR1-W	IR2-W	IR3-W	IR2-W	IR3-W
Light units	1	2	3	2	3
Luminous flux [lm]	1,000-3,800	1,900-7,700	2,900-10,900	1,800	2,700









Glass cover



Glass cover can be opened without tools

Bolted glass cover

170 171 ewo.com 1^{st} edition, October 2023; Copyright: © ewo srl/GmbH







PUBLIC SPACE ROADS AND TRAFFIC





The CO family of luminaires shares design features with the CN family, where square lighting units are placed within a circular luminaire head. This family is ideal for urban lighting applications including area, street, walkway lighting and lighting of pedestrian crossings. Optically, the CO can be configured with either A-Series high precision lens optics or T–Series low glare ewoLightTile for tunable white applications bringing humancentric lighting to urban spaces.

173 ewo.com

Shape of Light





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology


ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

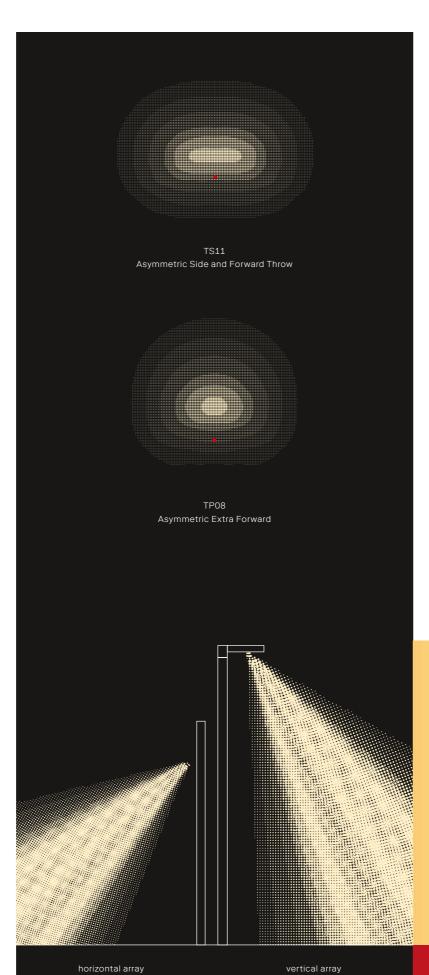


Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations

For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

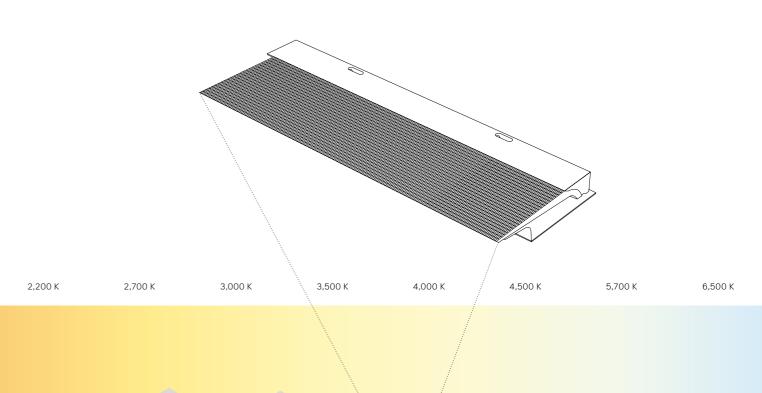

Tunable White CRI ≥ 80


luminous range: 3xLPH

174







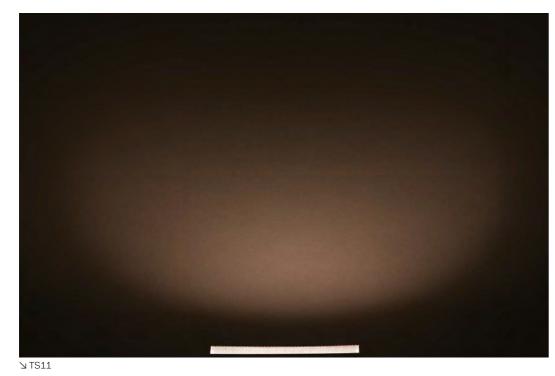

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.




::::.


INTELLIGENCE OF LIGHT




POLE / WALL CO600 -W





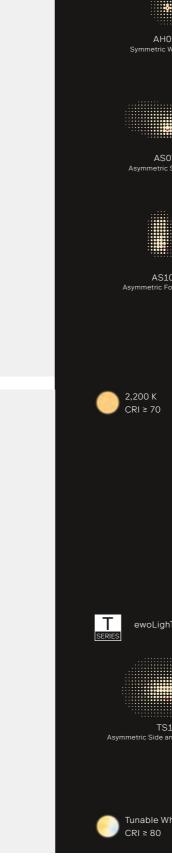

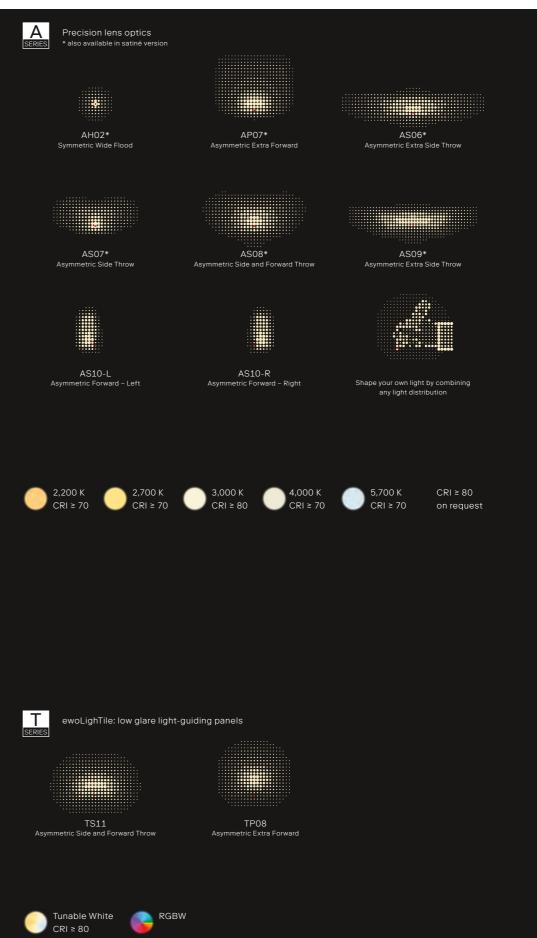



Control protocols

Programming options

CLO	Constant Lumen Output	
AC/I	C Emergency power supply	,

Stand-alone



Control protocols

DALI 2 T8

Programming options

Night dimming





4-5 lighting units



T-Series CO600 4-5 lighting units

ewo.com





Public space Roads and traffic










Configurator





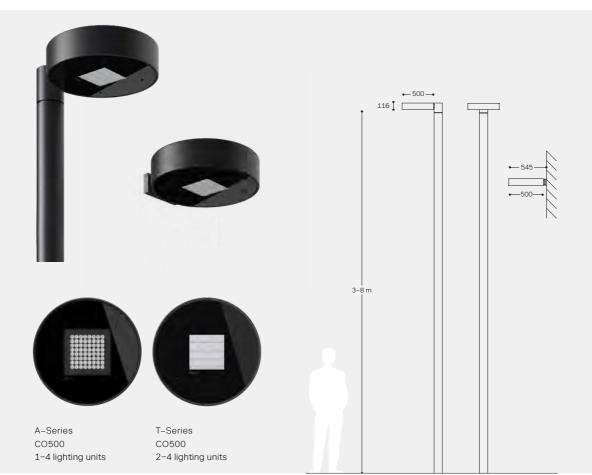

Housing

Housing material	Aluminum
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top Ø60 mm,
	Ø76 mm, Ø114 mm or Ø133 mm (single or double design)

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500	225
LED power max. [W]	95	48


Measurements

Model	LPH [m] ①	↓ ^ ②	→ ^ 3	Weight [kg] ®
CO500	3-8	0.21	0.08	14
CO500-W	/	0.20	0.06	15
•	1 in 0.1 m steps	② projected wir	ndage area [m²]	® max. weight
		3 lateral windag	ge area [m²]	236 excluding pole

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	•••••••••••••••••••••••••••••••••••••••

Driver T-Series A-Series T8 DALI Control options Programming Constant Lumen Output (CLO) [optional] Emergency power supply (AC/DC) Stand-alone Control accessories Further accessories on request Software connexx light management software for remote management of intelligent luminaire clusters

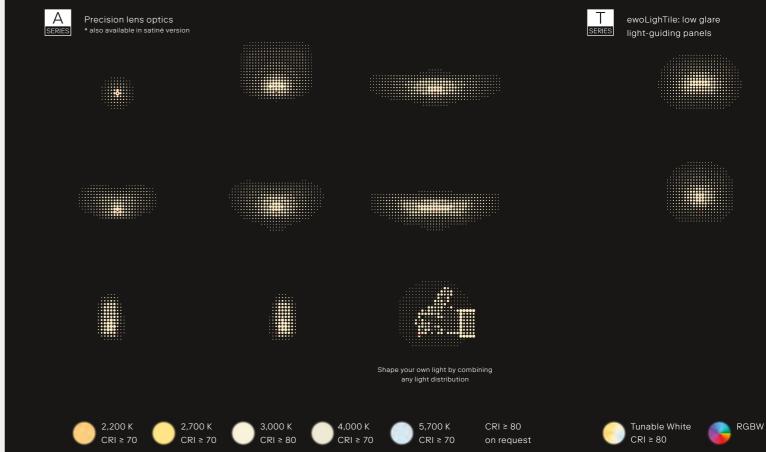

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 S	DCM

Model	CO500/-W	CO500/-W	_
Light units	1-4	2-4	
Luminous flux [lm]	1,000-11,800	3,600	






Accessories

ewoLightLayers (optical accessories)









Anti-Glare Grid

180 181 1st edition, October 2023; Copyright: © ewo srl/GmbH ewo.com

^{*} other color on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to
ensure extreme corrosion resistance





Public space Roads and traffic










Configurator





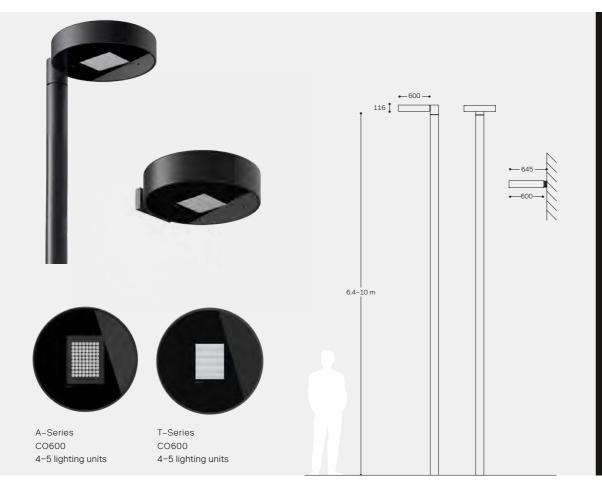

Housing

Housing material	Aluminum
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top Ø60 mm, Ø76 mm, Ø114 mm or Ø133 mm (single or double design)
•••••	* other color on request

Measurements


Model	LPH [m] ①	↓ ૄ ②	→ ③	Weight [kg] ®	
CO600	6.4-10	0.30	0.09	18.0	
CO600-W	/	0.29	0.07	19	
	① in 0.1 m steps	② projecte	d windage area [m²]	® max. weight	
		3 lateral wi	ndage area [m²]	236 excluding pole	

Electrical A-Series T-Series Protection class 1/11 Voltage [V], [Hz] 220-240, 50/60 220-240, 50/60 Current feed max. [mA] 500 225 LED power max. [W] 120 60

Operating conditions

Lifetime	Visit the configurator for specific lifetime options

Driver A-Series T-Series T8 DALI Control options Programming Constant Lumen Output (CLO) [optional] Emergency power supply (AC/DC) Stand-alone Control accessories Further accessories on request Software connexx light management software for remote management of intelligent luminaire clusters

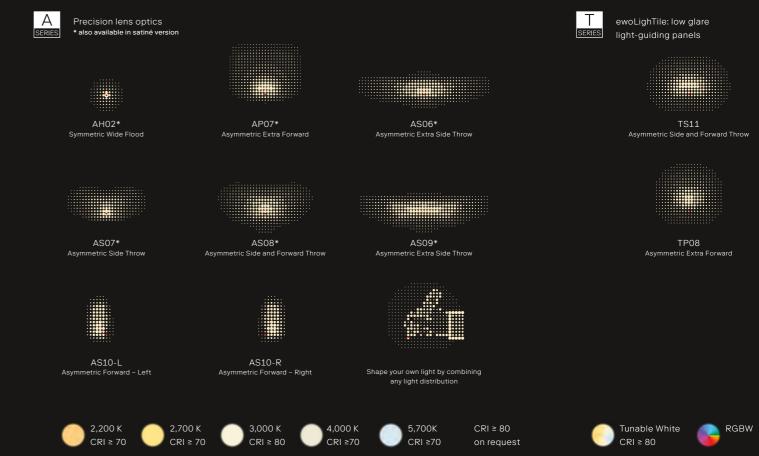

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 SI	DCM

Model	CO600/-W	CO600/-W
Light units	4-5	4-5
Luminous flux [lm]	3,800-14,700	4,600





Accessories

ewoLightLayers (optical accessories)









Anti-Glare Grid

^{**} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance








PUBLIC SPACE ROADS AND TRAFFIC

DA

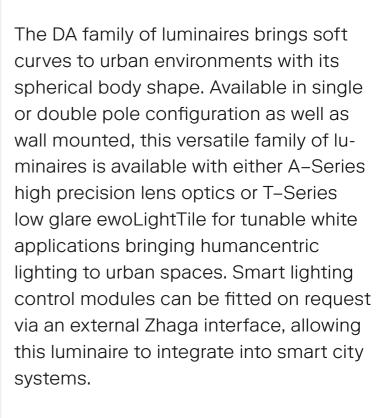



185 ewo.com

Shape of Light





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology


ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

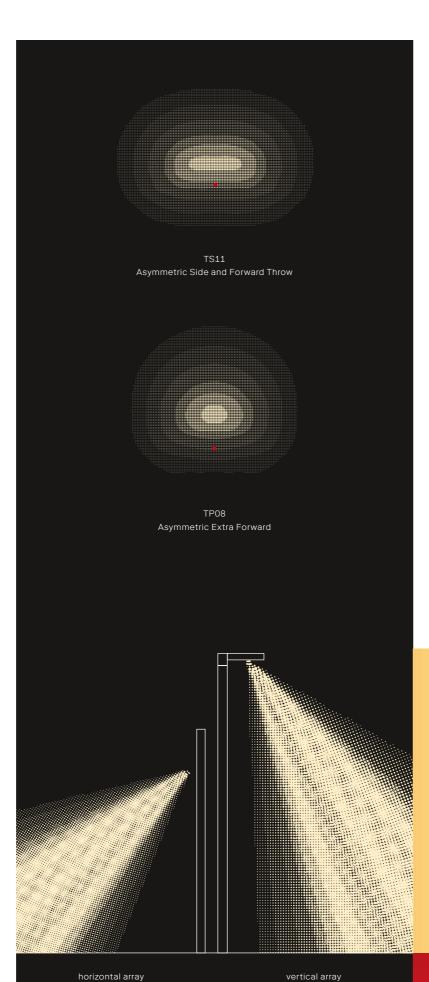


Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations


For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

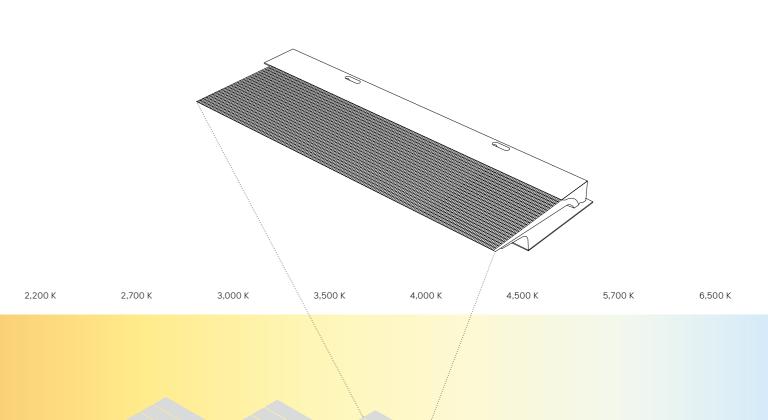


Tunable White CRI ≥ 80

luminous range: 3xLPH



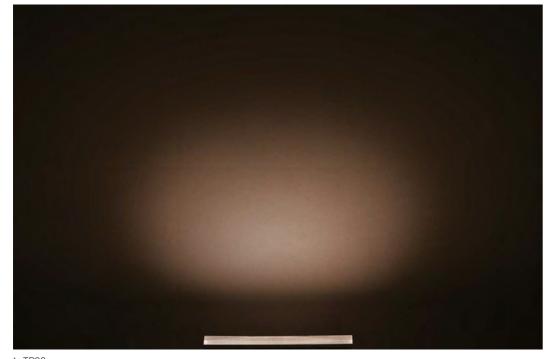



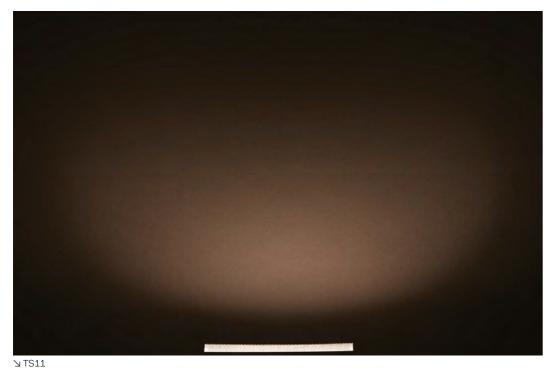



Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



::::.


DA



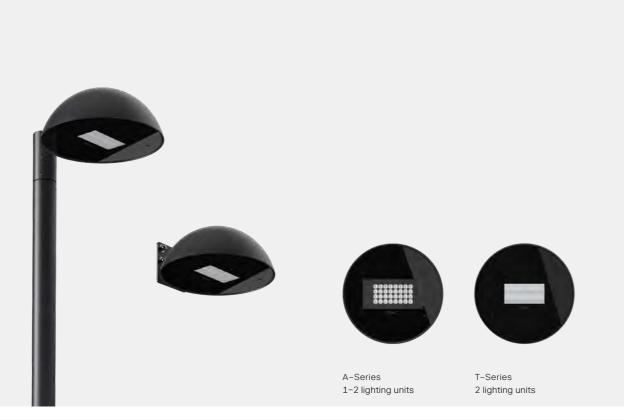

POLE / WALL DA520 DA520-W



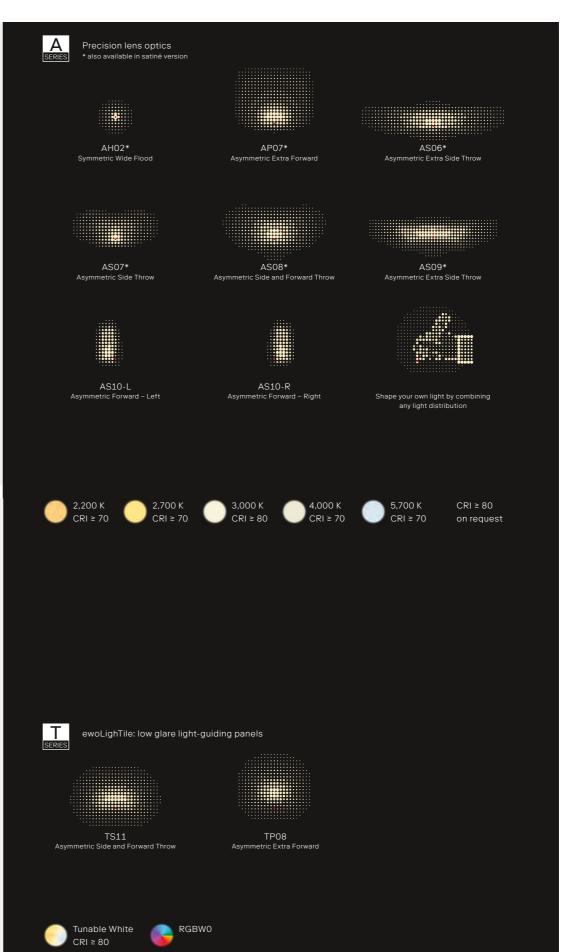



Control protocols

ON/OFF	OFF
DALI 2	DALI
1–10 V	1=10V
ewo connexx	$\times\!\!\times\!\!\times$
Zhaga Book 18	Z
Line Switch	LJS

Programming options

CLO	Constant Lumen Output			
AC/DC	Emergency power supply			
Stand-alone				



Control protocols

DALI 2 T8



Programming options

Night dimming



DA



Public space Roads and traffic










Configurator





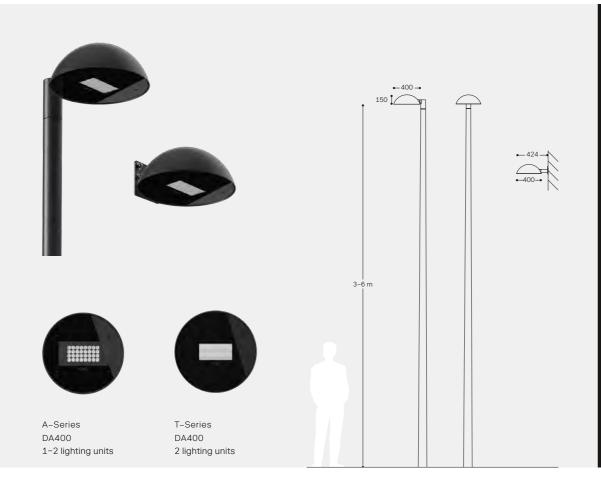

Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top $\varnothing 48$ mm, $\varnothing 60$ mm, $\varnothing 89$ mm, $\varnothing 114$ mm or $\varnothing 133$ mm (single or double design) / fixed position, 0° for pole-top $\varnothing 48$ mm / adjustable in 5° increments from 0–90°, for pole-top $\varnothing 76$ mm or $\varnothing 60$ mm
•••••	* other color on request

^{*} other color on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to

Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500	225
LED power max. [W]	55	24


Measurements

Model	LPH [m] ①	↓ ②	→ ^ ③	Weight [kg] ®	
DA400	3-6	0.14	0.07	11.5	
DA400-W	/	0.13	0.05	10.0	
•••••	① in 0.1 m steps	② projecte	d windage area [m²]	® max. weight	
		3 lateral wi	ndage area [m²]	236 excluding pole	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	•••••••••••••••••••••••••••••••••••••••



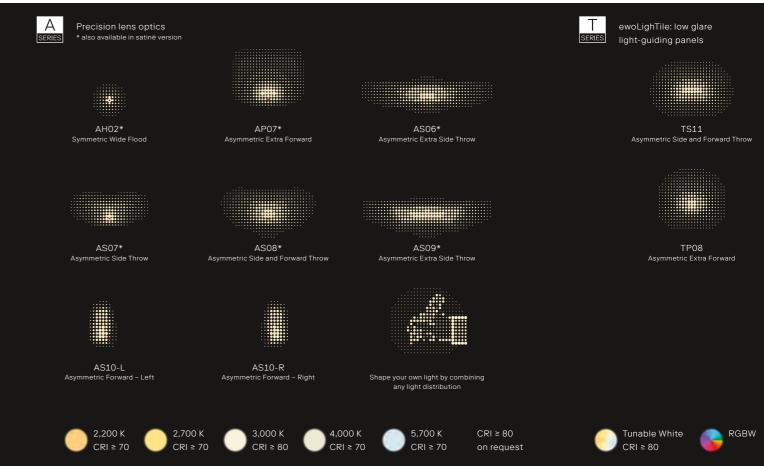

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5 S[OCM

Model	DA400/-W	DA400/-W
Light units	1–2	2
Luminous flux [lm]	1,000-6,300	1,800





Accessories

 $ewoLightLayers \ (optical \ accessories)$









Backlight shield Anti-Glare Grid 60° / 70°



DA520 DA520-W

Public space Roads and traffic










Configurator





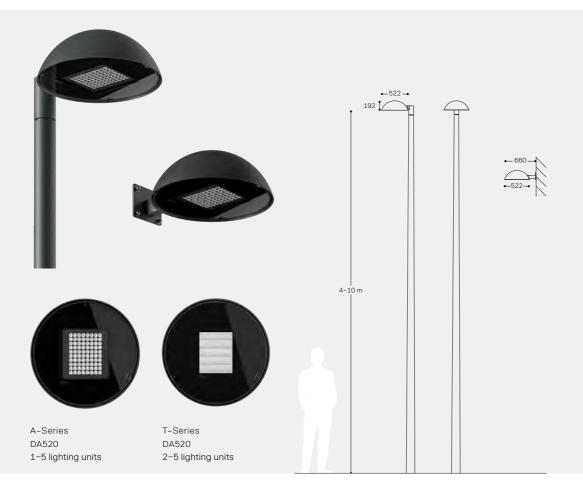

Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole, wall
Pole adapter	Aluminum, fixed position, 90° for pole-top $\varnothing 89$ mm, $\varnothing 114$ mm or $\varnothing 133$ mm (single or double design) / swivels from 0 to 90° in 5° increments, for pole-top $\varnothing 76$ mm or $\varnothing 60$ mm

^{*} other color on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to
ensure extreme corrosion resistance


Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500	225
LED power max. [W]	123	60

Measurements

		3 lateral winda	ige area [m²]	238 excluding pole
	① in 0.1 m steps	② projected wi	ndage area [m²]	® max. weight
DA520-W	/	0.22	0.09	17.5
DA520	4-10	0.23	0.10	18.0
Model	LPH [m] (1)	↓ <u>「</u> ②	→ <u>[</u> ③	Weight [kg] (5)

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	··· ·

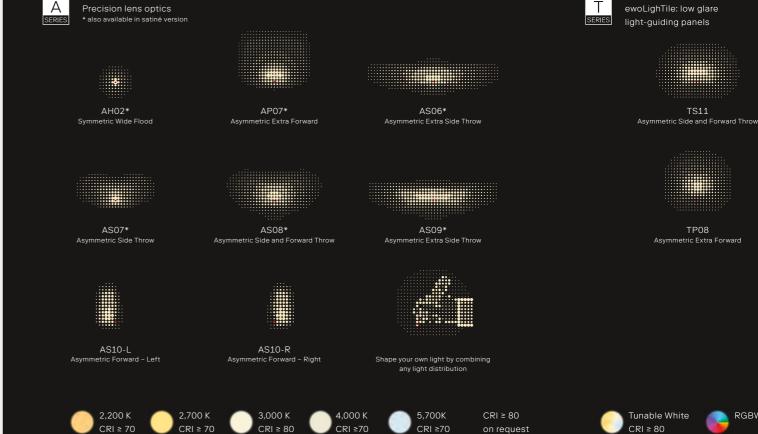

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	Т	S11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM					≤ 5 SD	CM

Model	DA520/-W	DA520/-W
Light units	1-5	2-5
Luminous flux [lm]	1,000-14,700	4,600

Driver A-Series T-Series T8 DALI Control options Programming [optional] Emergency power supply (AC/DC) Stand-alone Control accessories Further accessories on request Software connexx light management software for remote management of intelligent luminaire clusters

Available designs (also available as pendant)



Accessories

ewoLightLayers (optical accessories)









TP08

Backlight shield Anti-Glare Grid 60° / 70°








ACCENTS BUILDINGS



The FN family of pole mounted luminaires is available with either A-Series high precision lens optics for static white applications or T-Series low glare ewoLightTile for tunable white configurations. Its body can house up to six lighting units, providing various light distributions for area, high bay, street or walkway lighting. A single lighting unit can be added to the back of the luminaire for applications requiring a more bi-directional approach. Smart Lighting control modules for different communication standards or external Zhaga interface can optionally be integrated into the luminaire, allowing it to join smart city networks.

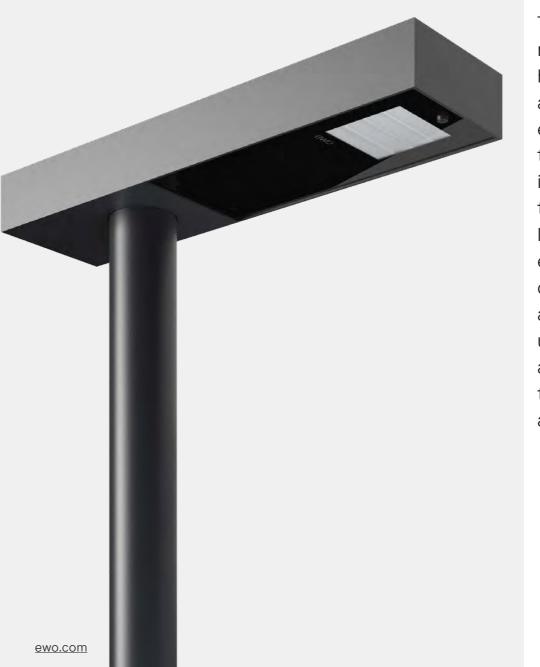

Shape of Light





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology

ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA 9.6-36.9 W per ewoLightTile

Luminous flux up to 2,300 lm per ewoLightTile

Asymmetric Side and Forward Throw TP08 Asymmetric Extra Forward


horizontal array

Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations

For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

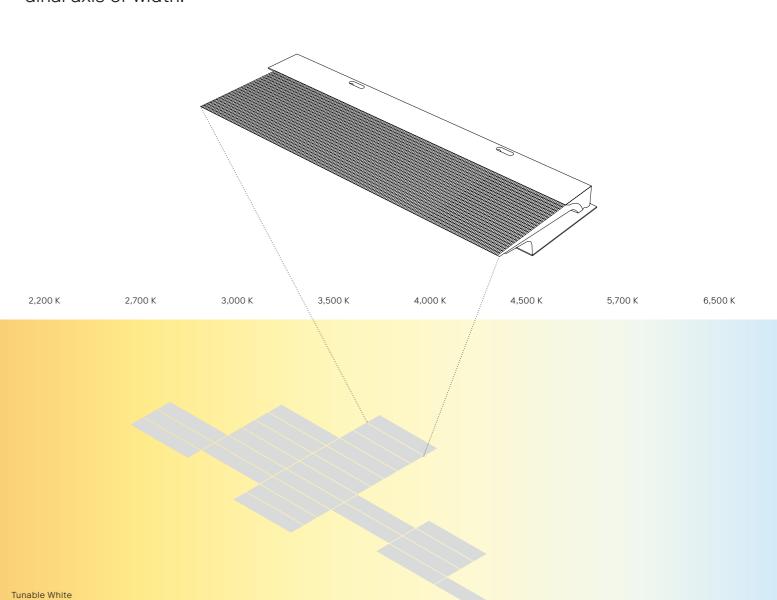


vertical array luminous range: 3xLPH CRI ≥ 80







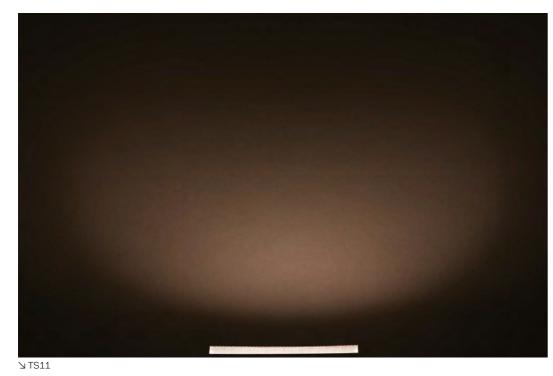

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



BODY OF LIGHT

SHAPE OF LIGHT

:::.



DALI

1-10V

XX

Z

Control protocols

ON/OFF

DALI 2

1-10 V

ewo connexx

Line Switch

Stand-alone

Zhaga Book 18

Programming options

CLO Constant Lumen Output

AC/DC Emergency power supply

A

FN



POLE FN1300 FN1300-B







1-4+1 lighting

units





units



units



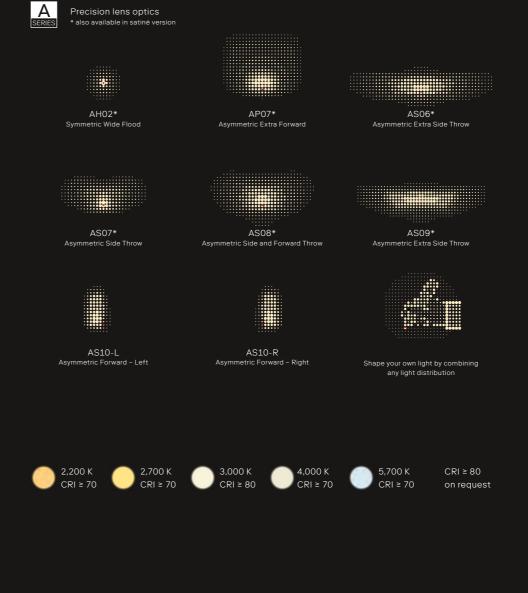



Programming options

Night dimming






5-6+1 lighting

units




units

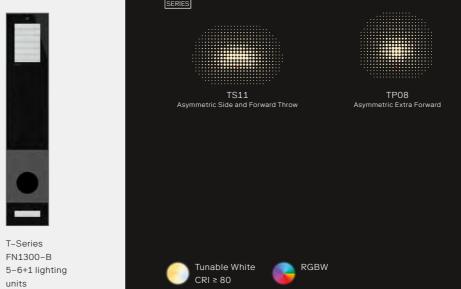

ewoLighTile: low glare light-guiding panels

units



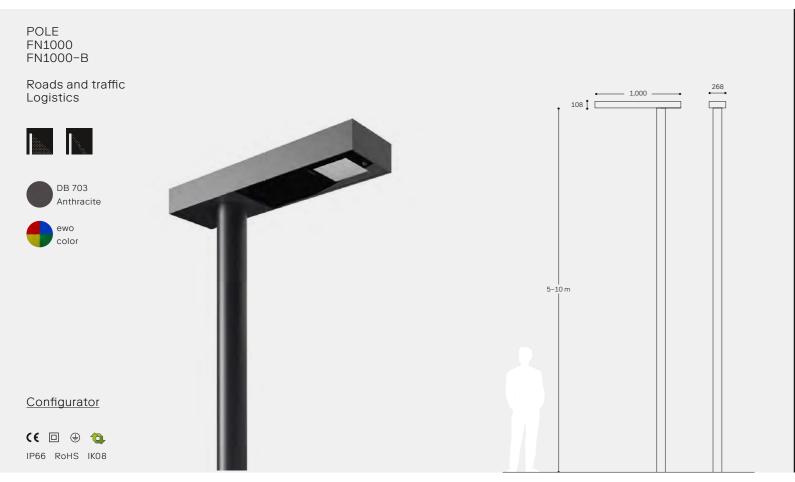

Housing

Housing material	Extruded aluminum profile
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole
	* additional color on request

** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements


Model	LPH [m] ①	1 2	→ ^ 3	Weight [kg] ®
FN1000	5-10	0.27	0.11	21.5
FN1000-B	5-10	0.27	0.11	24.0
•	10 in 0.1 m steps	② projected wir	ndage area [m²]	® max. weight
		3 lateral winda	ge area [m²]	236 excluding pole

Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220–240, 50/60
Current feed max. [mA]	700	225
LED power max. [W]	174	60

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·



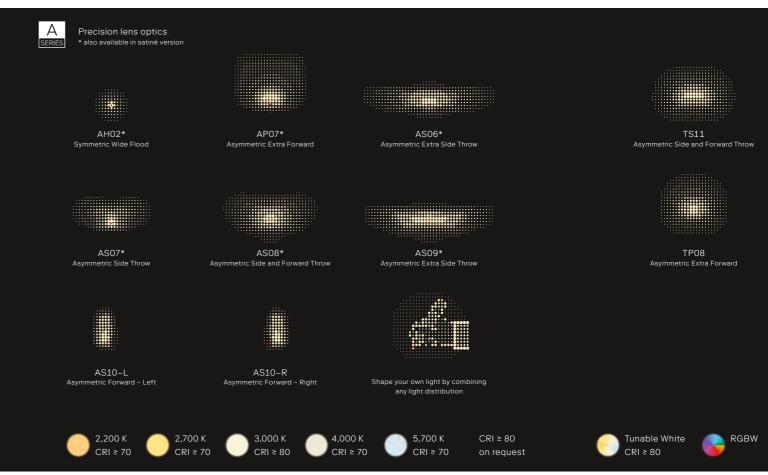

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5	SDCM

Model	FN1000	FN1000-B	FN1000	FN1000-B
Light units	1-4	1-4+1	2-4	2-4+1
Luminous flux [lm]	1,000-15,500	1,900-19,400	3,600	4,600

Available designs



Accessories

ewoLightLayers (optical accessoires)









Anti-Glare Grid 60° / 70°



FN



Housing

Housing material	Extruded aluminum profile
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Glass	Safety glass (ESG)
Mounting options	Pole
	* other color on request
	** ewo three steps process (high quality alloy pre-treatment primer) to

ewo three steps process (high quality ensure extreme corrosion resistance

Measurements


Model	LPH [m] ①	1 2	→ ^ 3	Weight [kg] ®
FN1300	6.4-10	0.35	0.14	26.0
FN1300-B	6.4-10	0.35	0.14	28.5
•••••	① in 0.1 m steps	② projected wi	ndage area [m²]	® max. weight
		3 lateral winda	ige area [m²]	236 excluding pole

Electrical	A-Series	T-Series
Protection class	1/11	1/11
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	550	225
LED power max. [W]	195	83

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·

Driver	A-Series	T-Series	
Control options	ON DALI 1-10V XX Z Ly	T8 DALI	
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connexx light management software for remote manager		

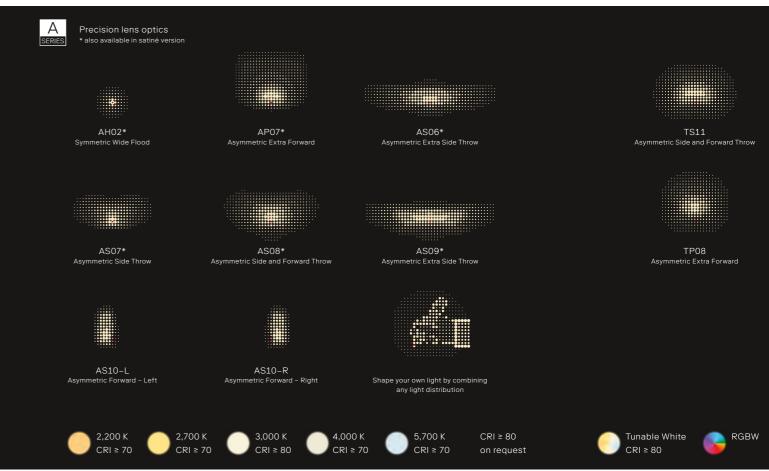

Performance

Optics	AH02	AP07	AS06	AS07	AS08	AS09	AS10-L	AS10-R	TS11	TP08
MacAdam ellipses (SDCM)				≤ 5 S	DCM				≤ 5	SDCM
	•	•	•	•	• · · · · · · · · · · · · · · · · · · ·	•	•	•		.

Model	FN1300	FN1300-B	FN1000	FN1000-B
Light units	5-6	5-6+1	2-4	2-4+1
Lumious. flux [lm]	4,700-19,100	5,700-22,300	5,500	6,400

Available designs



Accessories

ewoLightLayers (optical accessoires)









Anti-Glare Grid 60° / 70°

206 207 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH







ARCHITECTURE AND THE ARTS PUBLIC SPACE


if, if round

For paths, gardens and squares

When it all comes down to atmosphere, our if bollard luminaire is the perfect tool to direct light along walkways, gardens and squares in architectural surroundings. As an elegant continuation of the if bollard, if round and its slender form effortlessly blend in with any setting and environment. Be it in private gardens or on walkways, in residential areas or hotels: With its homogeneous illumination, *if* round is sure to meet even the highest demands of building owners, architects and planners.



209 ewo.com

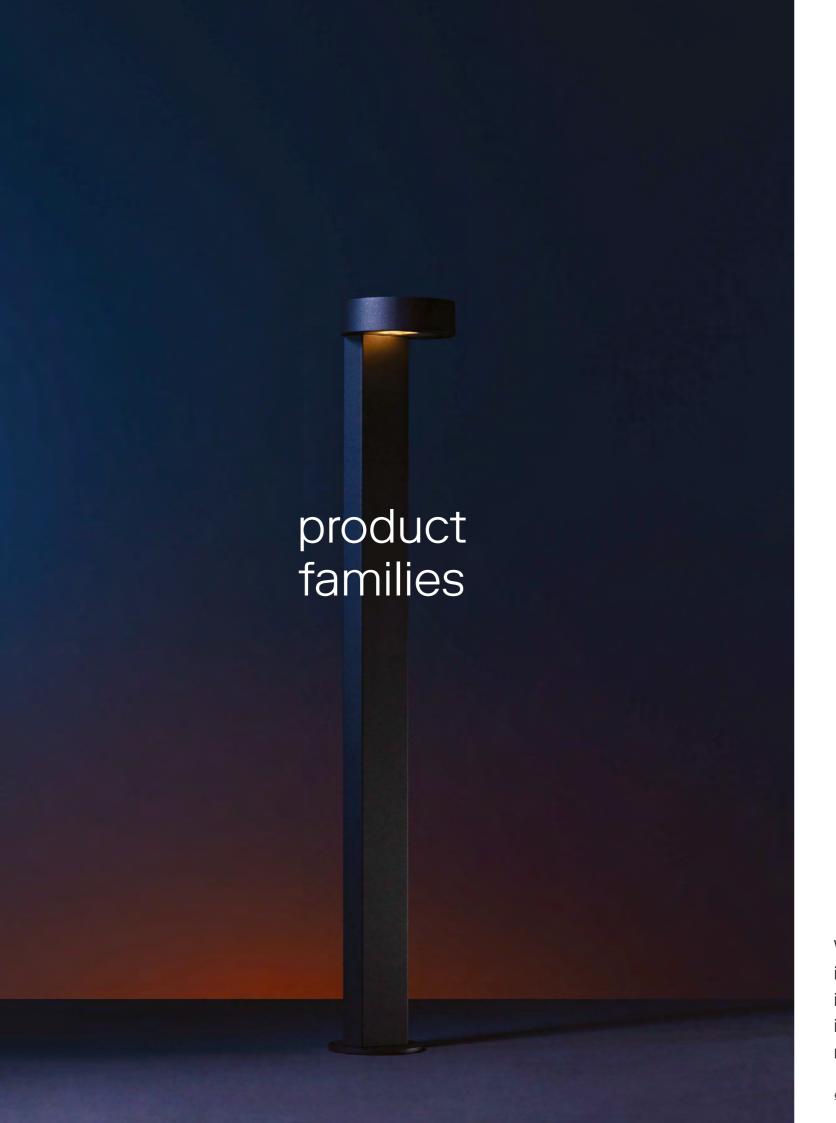



When it comes to atmosphere, our if round family, designed by Moritz Kessler, is the ideal solution for directional light on pavement, in gardens, and on squares in architectural settings. if round subtly adapts to any environment thanks to its elegant shape. With its even illumination, if round also meets the highest requirements of builders, architects, and planners. \checkmark Video

<u>ewo.com</u> 211



"What if"

Artist duo beierle.goerlich explores how light transforms space into fantastic scenery – with photographs and installations, and with characters and props swapping places. Through its light, *if* has a transformative effect on any location. That way, a clearing becomes a venue and a world in which the imagination knows no limits. A place where anything could happen *if* ...

if ...






Although *if* is perfectly at home in classic architectural settings, beierle.goerlich decided not to depict it together with buildings. Instead, they took typical gardening activities such as mowing the lawn, barbecuing or tending to flowers out of the context of cultural landscapes and relocated them to a forest. In a series of surrealistic images, captured at dawn or dusk, the characters are placed next to each other without any apparent relationship: for instance, the forest fauna and the Woman in Black – a recurring figure in beierle.goerlich's work – whose activities in the woods are soberly observed by onlooking animals. Much like the unruffled wildlife, *if* is a quiet, reserved witness, whose light nonetheless powerfully sets the stage at the heart of the Bavarian Forest.



beierle.goerlich – that's photographer Edward Beierle and artist Jutta Görlich. Their work typically takes them into close proximity with architecture, and oftentimes to places that are undergoing some sort of transformation, which offers them new scope for exploration. For ewo, the duo has shifted their gaze and lens to the *if* bollard luminaire.







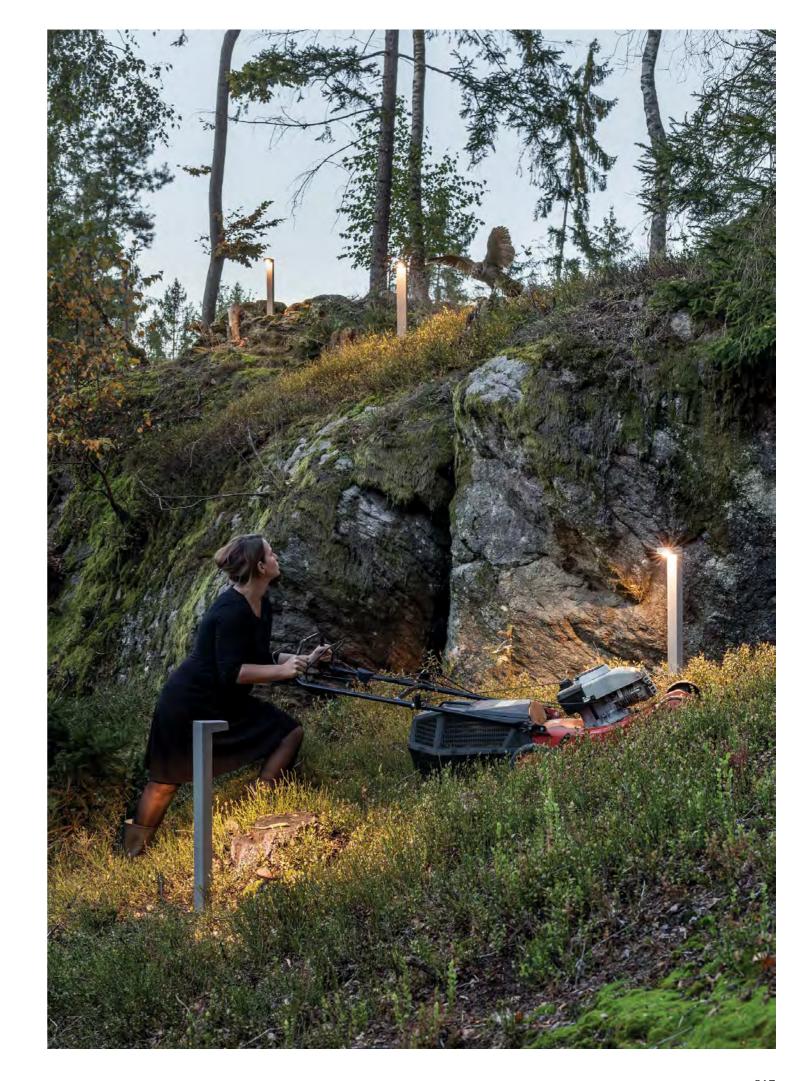

if round — slender elegance

if round adds yet another level of artistry and technology to the if product family. One particular detail makes the luminaire unmistakably recognisable as part of the if product family: the joint between the shaft and the head. if round stands out because the luminaire head can accommodate various A–Series lenses. For designers, this suddenly opens up the entire toolbox of our light-shaping technology – with symmetric and asymmetric light distributions and bespoke lighting configurations.

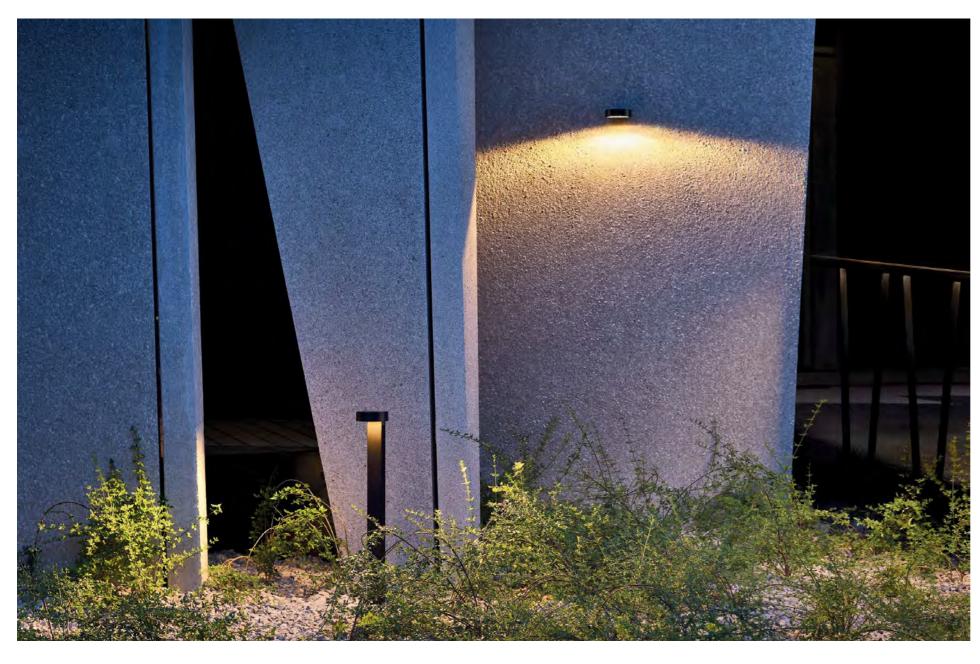

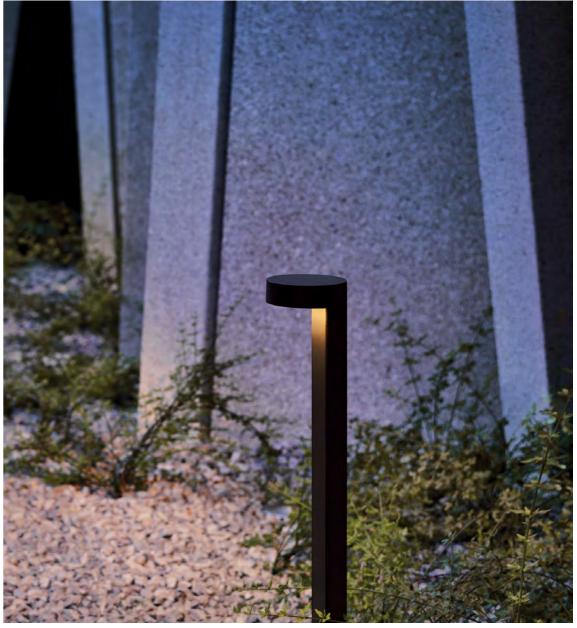

"As a trained architect, I am particularly fond of products that work in unison with buildings. With its pure, smooth geometry, if round is simple yet unmistakable."

- Hannes Wohlgemuth



Be it in private gardens or on walkways, in residential areas or hotels: With its homogeneous illumination, *if* round is sure to meet even the highest demands of building owners, architects and planners. Especially since it is also available in a wall-mounted version that significantly extends its range of application in, on and around any building. And in public spaces, *if* round is the ultimate tool to create and gently finetune any high-quality drama, for nearby objects, surfaces and moods alike.






Shape of Light

::.

Luminous range – unrivalled efficiency

By using asymmetric lenses from the A–Series, a homogeneous illumination of up to 10 m to the side can be achieved – a feat that makes planning walkways

and paths far more efficient than with comparable bollards. And not just with the desired intensity, but also guaranteeing the most economical use of light.

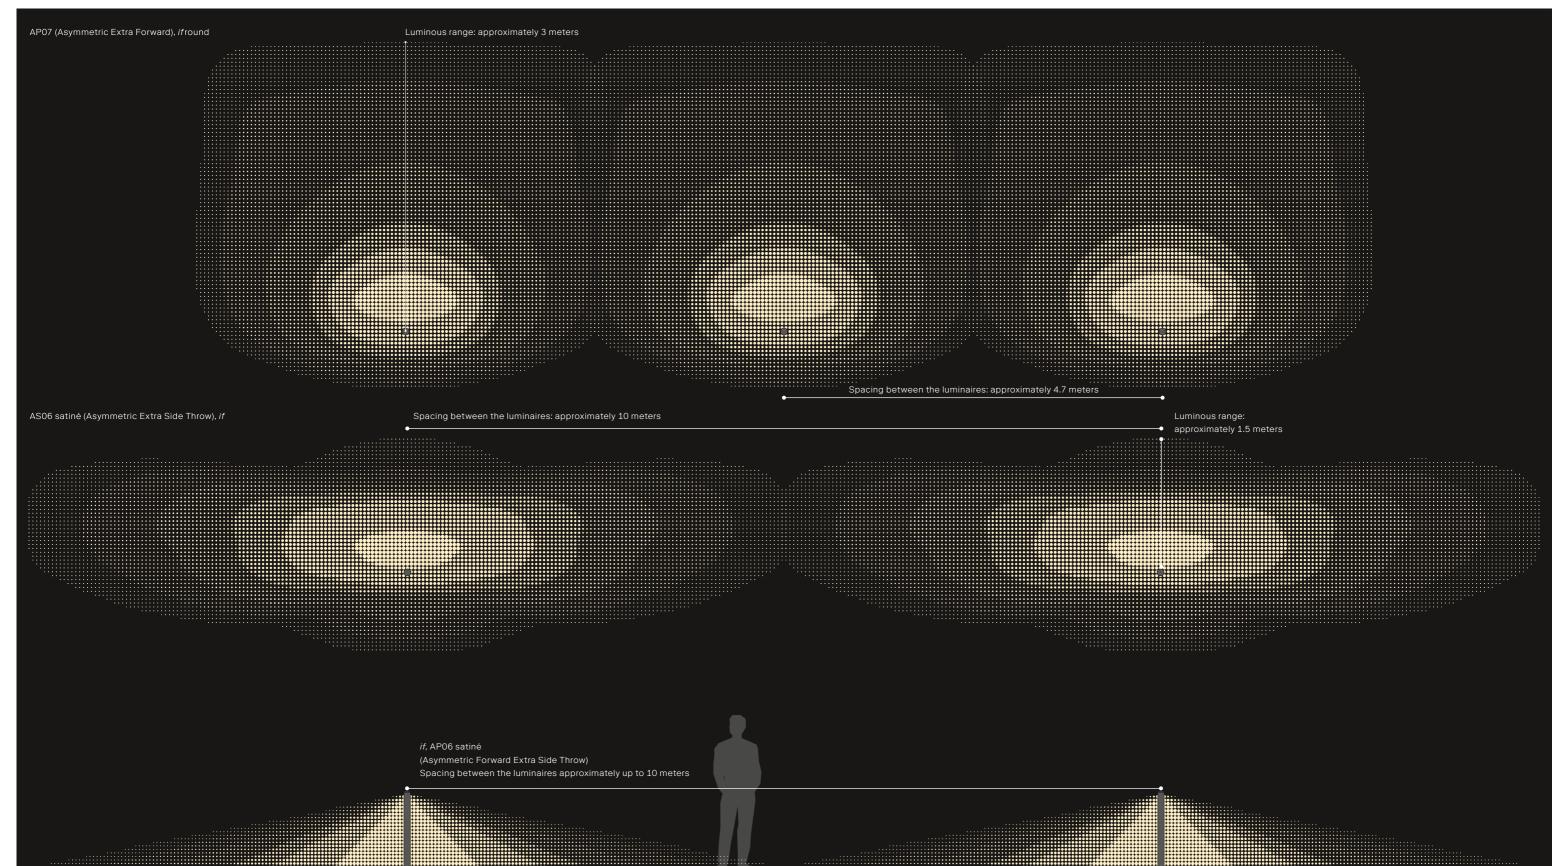



Body of Light


<u>...</u> :

"Our motivation was to develop a simple bollard luminaire that, thanks to its sleek elegance, can discreetly be integrated into any environment. The design links opposites in complete harmony: soft spheres on the vertical plane and clear cuts at the horizontal level."

— Moritz Kessler, product designer



"In the housing, the shaft and the head are linked by a joint – a smooth connecting detail with a decidedly natural look. if is uncompromising in its shape and construction."

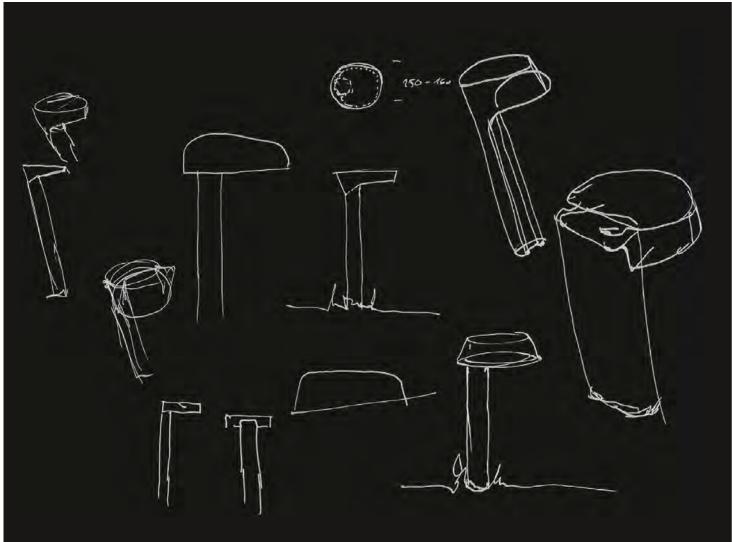

Playful light

"For the paths that lead the guests to their villas, we created a perforated variation of the if round that provides a distinctive and welcoming presence in the otherwise sparingly lit landscape. The resultant vibrancy is reminiscent of a collection of lanterns being left out to guide the guest home."

— The Flaming Beacon, Lighting Designers



The eye-catching effect of our perforated screen. An ewoIndividual project for Park Hyatt Maldives Hadahaa and The Ritz Carlton Maldives. Fari Islands.



BODY OF LIGHT

SHAPE OF LIGHT


::::.


Control protocols


ON/OFF

A SERIES

if, if round



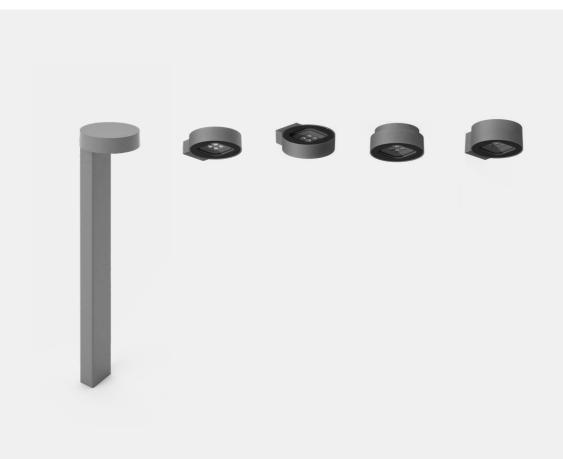


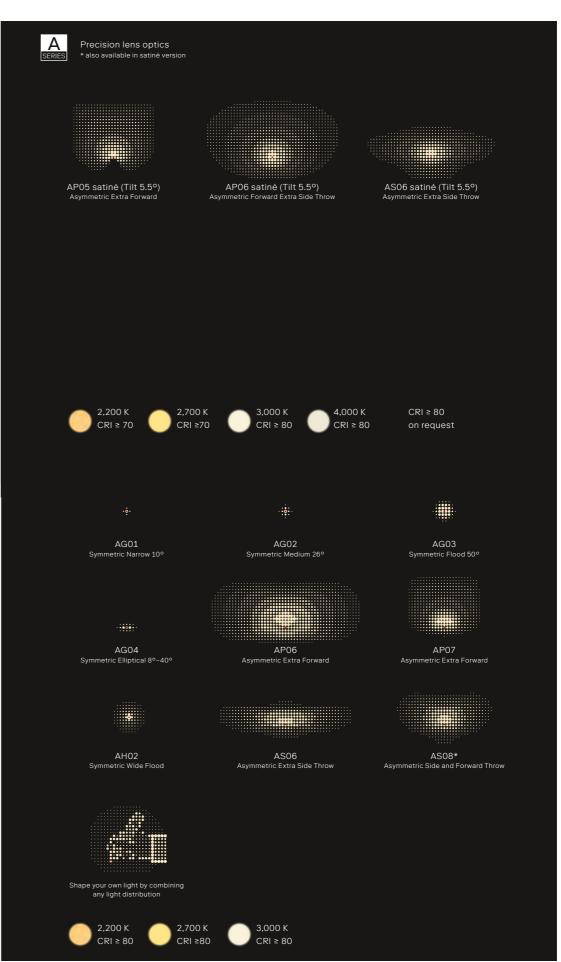

if round-BD
if round-WD

if round-WU if round-CL if round-WB



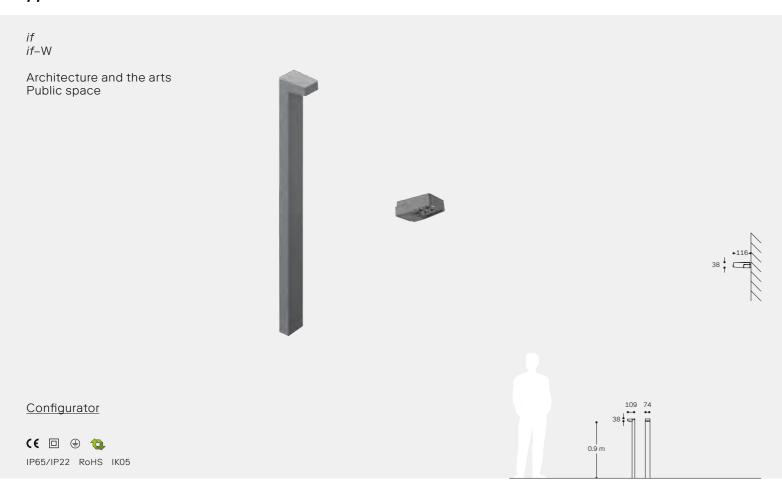

Housing material	Aluminum die-cast*
Housing finish	Polyester powder coating (ewoECP upon request***)
Finish standard colour	Silver grey (RAL9007 / DB 702)**
Cover	РММА
Mounting options	Pole, wall
	* note made of extruded aluminium profile

- * pole made of extruded aluminium profile
- ** other color on request
- *** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements


Model	LPH [m] ①	↓ ^ ②	→ ③	Weight [kg] ®
if	0.9	0.01	0.07	2.5
if–W	/	0.01	0.01	0.5
	① other LPH available	@ projected wir	ndage area [m²]	® max. weight
	upon request	(3) lateral windag	ge area [m²]	238 pole included

Electrical	A-Series	
Protection class	1/11	
Voltage [V], [Hz]	220-240, 50/60	
Current feed max. [mA]	250	
LED power max. [W]	5	

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
***************************************	······

Driver	A-Series
Control option	S ON OFF
Control acces	sories Further accessories on request
Software	connexx light management software for remote management of intelligent luminaire clusters

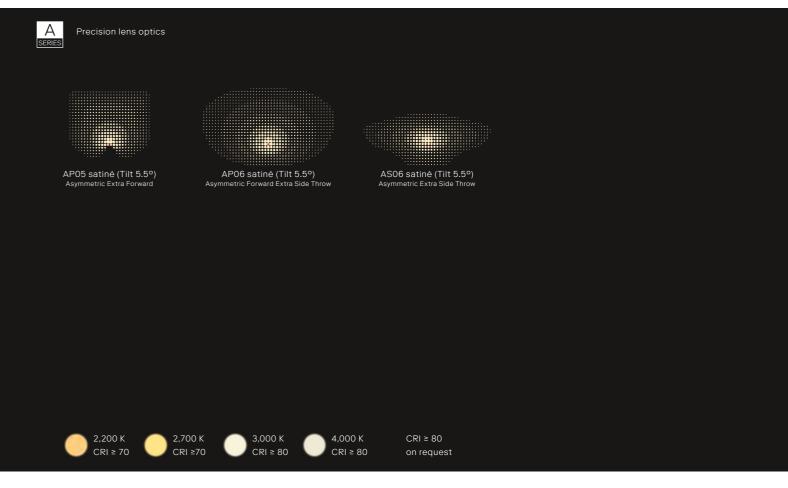

Performance

Optics AP	'05 satiné AP06	satiné AS06 satine	é
MacAdam ellipses (SDCM)	≤ 5 \$	SDCM	

Available designs








Accessory

Single Wall-mounted

228 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH



if round

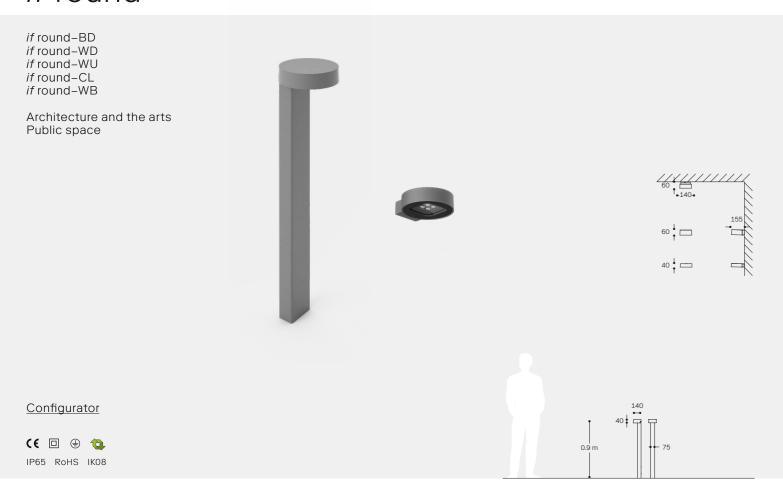

Housing

Housing material	Aluminum die-cast*	
Housing finish	Polyester powder coating, ewoECP upon request***	
Finish standard colour	Silver grey (RAL 9007 / DB 702)**	
Glass	Safety glass (ESG)	
Mounting options	Pole, wall, ceiling	
	* pole made of extruded aluminium profile	

- ** other color on request
- *** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements


Model	LPH [m] ①	J 2	→ ^ 3	Weight [kg] ®
if round-BD	0.9	0.02	0.07	3.0
if round-CL	/	0.02	0.01	1.1
if round-WD	/	0.02	0.01	0.8
if round-WU	/	0.02	0.01	0.8
if round-WB	/	0.02	0.01	0.9
		able @ projecte	d windage area [m²]	® max. weight
	upon request	3 lateral w	indage area [m²]	236 pole included

Electrical	A-Series	
Protection class	1/11	
Voltage [V], [Hz]	220-240, 50/60	
Current feed max. [mA]	650	
LED power max. [W]	10	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	. *

Driver A-Series	
Control options ON OFF	
Control accessories Further accessories on request	
Software connexx light management software for remote management of intelligent luminaire clusters	

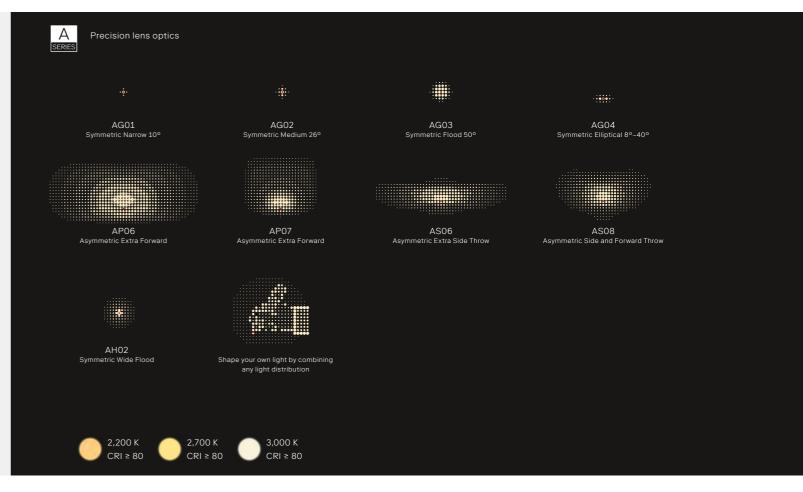

Performance

Optics	AH02	AG01	AG02	AG03	AG04	AP06	AP07	AS06	AS08	
MacAdam ellipses (SDCM)					≤ 5 SDCM					
				•					···········	

Model	if round-BD	if round-CL	if round-WD	if round-WB	if round-WU
Light units	1	1	1	1	1
Luminous flux [lm]	190-730	190-730	190-730	190-730	190-730

Available designs





CL (Ceiling)



WD (Wall Downlight)



Downlight)



WB (Wall Uplight and WU (Wall Uplight)



Diffusor

Accessories



230 1st edition, October 2023; Copyright: © ewo srl/GmbH







ARCHITECTURE AND THE ARTS PUBLIC SPACE

EL

New levels of visual comfort for urban living

A luminaire for illuminating paths, setting accents and even illuminating facades.

<u>ewo.com</u> 233




ewo.com


ST. MARTIN TOWER Frankfurt am Main, Germany, 2015 Kubus Freiraumplanung Gbr ewolndividual, EL



CITTADELLA NUOVA Pisa, Italy, 2014 Fabio Daole ewoIndividual, EL

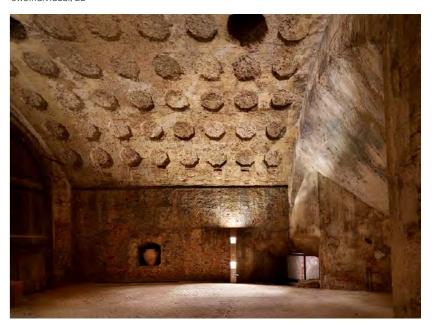

LA SEINE MUSICALE Boulogne-Billancourt, France, 2016 8.18 paris ewolndividual, EL

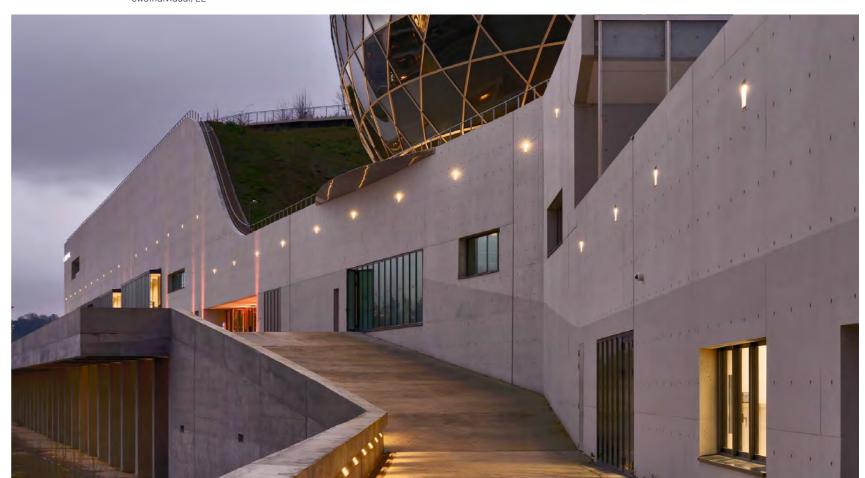

LUXTRAM
Luxembourg, Luxembourg, 2017
Atelier Lumière



WALDKLINIK Eisenberg, Germany, 2021 HDR Germany, Matteo Thun & Partners



XAL COMPETENCE CENTER Graz, Austria, 2011–2013 XAL FA, EL




ewo.com





Shape of Light

The EL family is compatible with ewo's A–Series precision lens optic or ewoLightTile, low glare light guiding panels. Fitted with A–Series optics, the EL becomes an ideal luminaire for street-lighting and pathway applications. The homogenous yet precise ewoLightTile optics on the other hand, brings dynamic lighting to public spaces to improve wellbeing outside.

EL light columns allow for the configuration of up to 6 light units. Each of the light units can be configured with the desired A–Series optic to create just the right light distribution for a specific project. This freedom of the configuration of optics, helps to exactly direct the light to where it's needed.



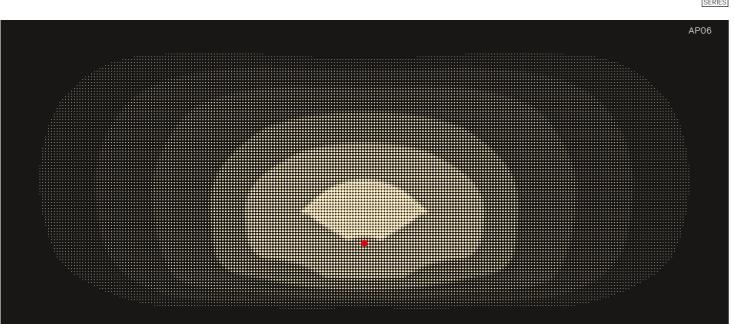


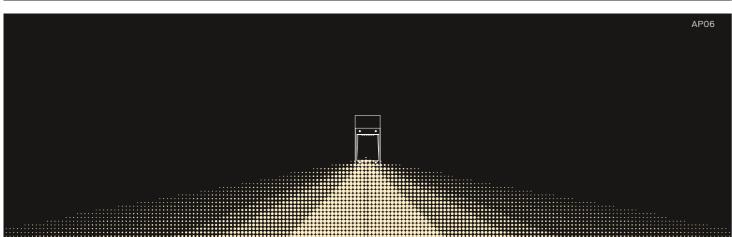






Α

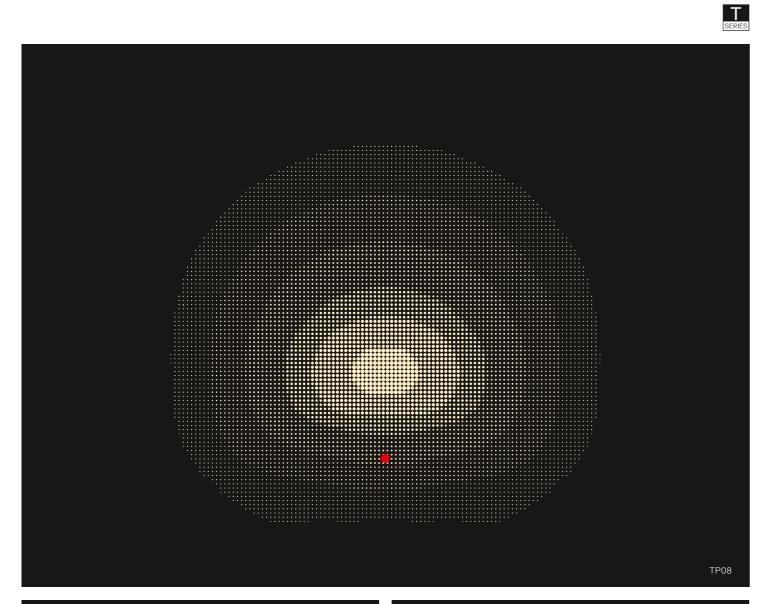

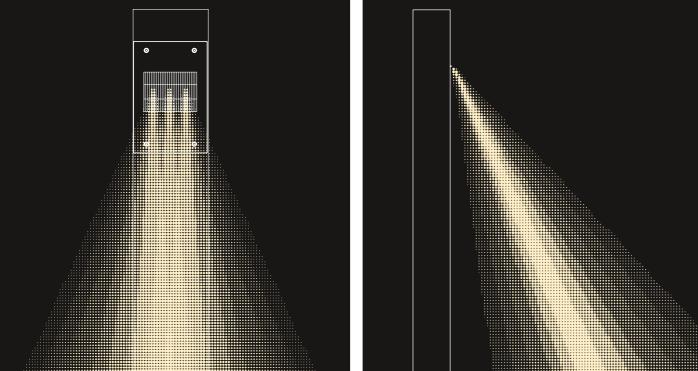

Dynamic Lighting has the power to transform public spaces into urban sanctuaries, improving people's wellbeing outdoors. The ewoLightTile optic not only achieves excellent colour mixing, it also conceals the LED light points from view so onlookers can enjoy the light effect without experiencing unwanted glare. And with ewo's precision optics, also the dynamic light is precisely directed for regulation complaint lighting schemes.





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology

ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

100-350 mA Current feed

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

Asymmetric Side and Forward Throw TP08 Asymmetric Extra Forward


horizontal array

Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations


For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

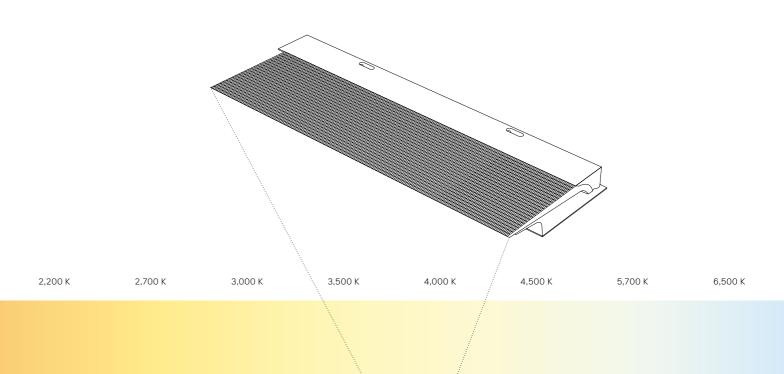


Tunable White CRI ≥ 80

vertical array luminous range: 3xLPH



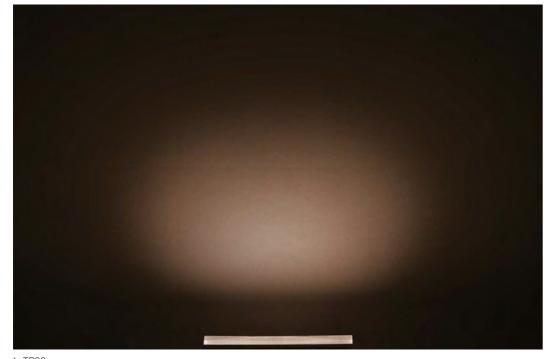



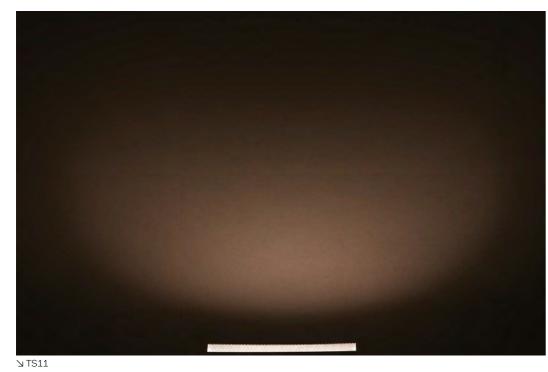

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.






Body of Light





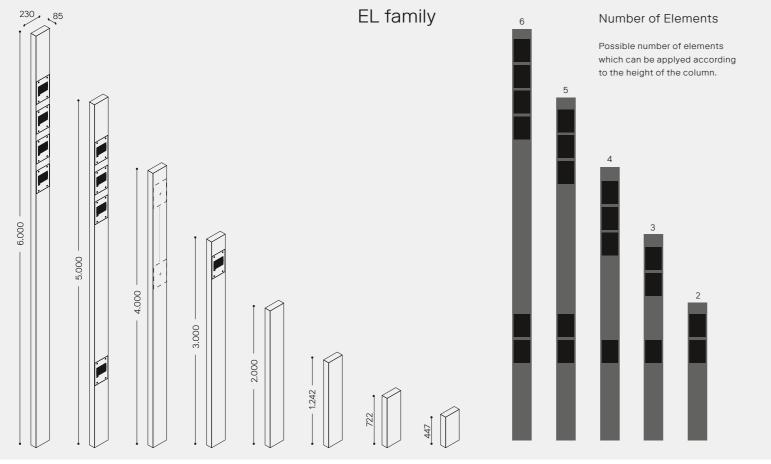



Function

The EL family of luminaires looks great and is also strong. With an IK of 10 and single-pane safety glass, this product can resist the daily challenges public lighting needs to endure.



Form


EL light columns come in a range of sizes from 447mm height all the way to 6m. This makes the EL family of luminaires a versatile tool for both pathway, square and street lighting. Furthermore, the modular nature of the light elements, allows for integration into other product families such as the FA, with an EL light element recessed into the pole.



ewo colours

Finish

With its elegant COR-TEN finish option, EL light columns can transform public areas into modern urban retreats. And if other finishes are needs, ewo offers an extended colour palette of finishes that can be chosen to best suit a space.




Intelligence of Light















Play with colour


Cityscapes are being transformed every day in the pursuit to creating dramatic spaces and enticing city centres. Controlling dynamic EL lighting solutions with DALI T8 will enable scene setting, automated lighting adjustment and an introduction to circadian lighting during the hours of darkness.





EL light columns can also be specified with Zhaga interface for smart city integration and intelligent central lighting control. This is an important feature to onboard urban lighting into the internet of things.





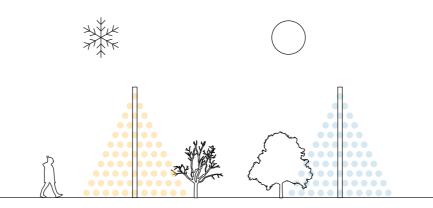







BODY OF LIGHT

SHAPE OF LIGHT

:::.

INTELLIGENCE OF LIGHT

BOLLARD EL380 EL710 EL1250

LIGHT COLUMNS

EL2000 EL3000

EL4000 EL5000 EL6000

WALL EL-W





1 recessed

lighting unit

000000 000000


A-Series


units

1-3 lighting



units

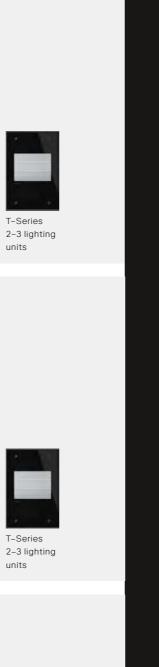

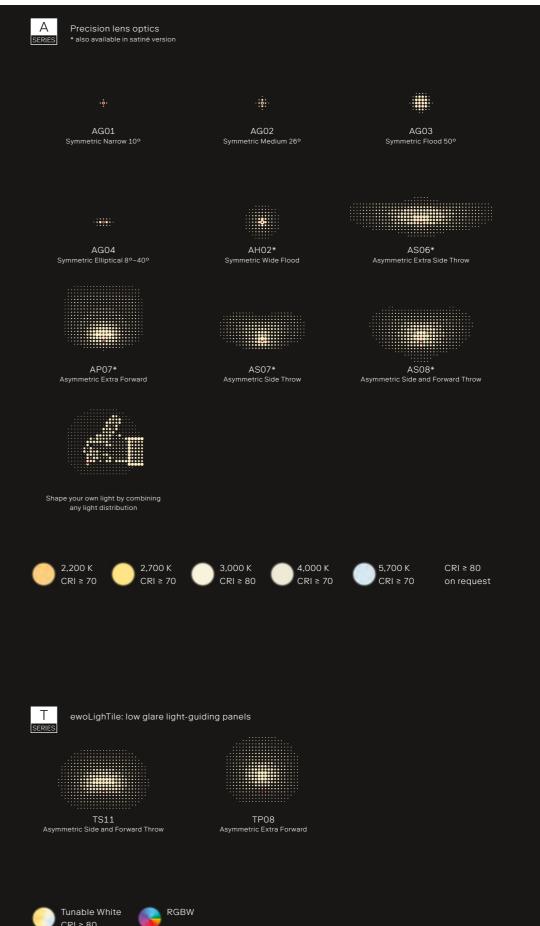



Control protocols

ON/OFF	ON OFF
DALI 2	DALI
1–10 V	1–10V
Line Switch	LJS

Programming options

CLO Constant Lumen Output

AC/DC Emergency power supply

Stand-alone




Control protocols

DALI 2 T8

Programming options

Night dimming





A-Series


1 recessed

lighting unit



T-Series

units



EL Bollard

EL380 EL710 EL1250


Architecture and the arts Public space
















Housing

Configurator

(€ □ ⊕ 🖜

IP66 RoHS IK10

Housing material	Extruded aluminium profile (optionally COR-TEN steel)
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Silver grey (RAL 9007 / DB 702)*
Glass	Safety glass (ESG)
Mounting options	Pole
	* other color on request
	** ewo three steps process (high quality alloy, pre-treatment, primer) to

ewo three steps process (high quality ensure extreme corrosion resistance

Measurements


Model	LPH [m]	↓ ૄ ①	→ ②	Weight [kg]	
EL380	/	0.02	0.10	13.5*	
EL710	/	0.02	0.17	17.0*	
EL1250	/	0.02	0.29	27.0*	
		① projected	d windage area [m²]	* buried base included	i
		② lateral wi	ndage area [m²]		

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	600	225
LED power max. [W]	67	36

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•••••	······································

Driver	A-Series	T-Series				
Control options	ON DALI 1-10V /S	T8 DALI				
Programming	Constant Lumen Output (CLO)					
optional]	Emergency power supply (AC/DC)					
	Stand-alone					
Control accessories	Further accessories on request	-				
Software	connexx light management software for remote mana	gement of intelligent luminaire clusters				

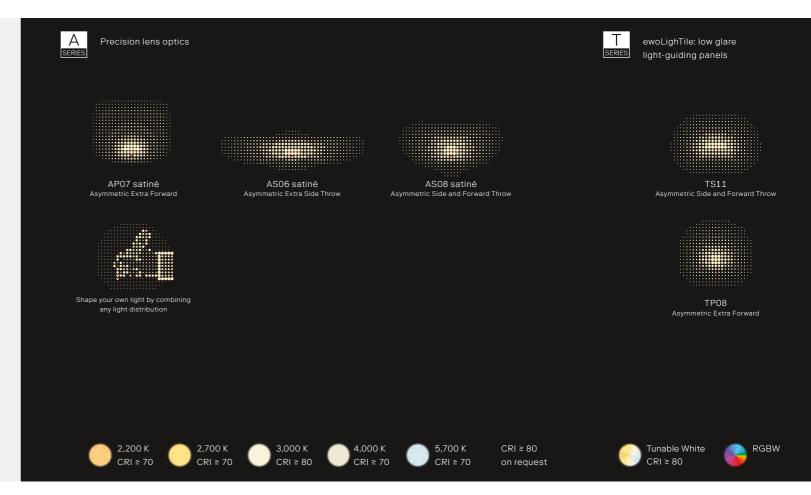

Performance

Distribution	AP07 satiné	AS06 satiné	AS08 satiné	TS11	TP08
MacAdam ellipses (SDCM)		≤ 5 SDCM		≤ 5 SI	DCM

Model	EL380	EL710	EL1250	EL380	EL710	EL1250
Light units	1	1	1	1	1	1
Luminous flux [lm]	300-1,100	300-1,100	300-7,500	2,700	2,700	2,700
• • • • • • • • • • • • • • • • • • • •	······		•		·····•	····•···

Models/equipment variations







Surface





Aluminium polyester powder coated


COR-TEN steel


255



EL Light Columns



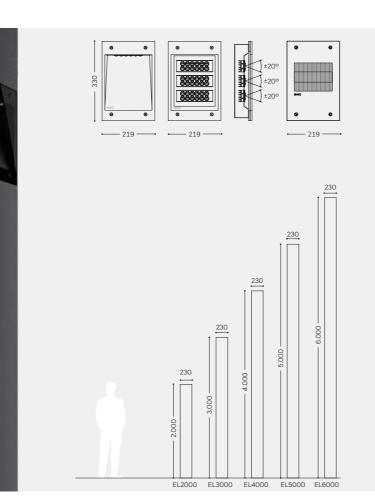

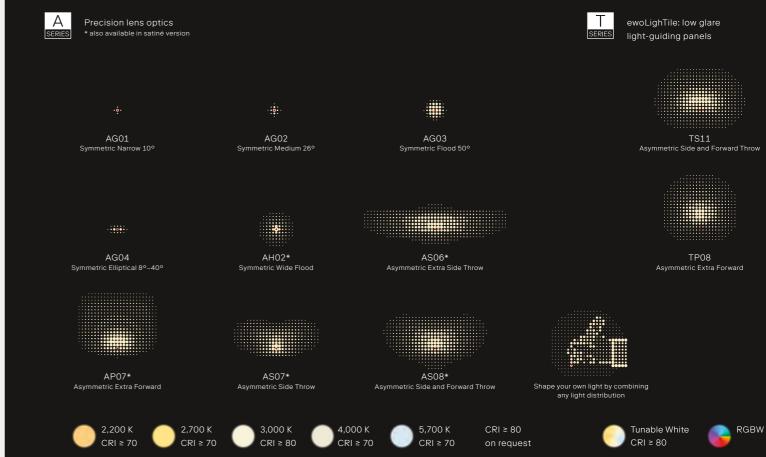

Housing

Housing material	Extruded aluminium profile (optionally COR-TEN steel)
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Silver grey (RAL 9007 / DB 702)*
Glass	Safety glass (ESG)
Mounting options	Pole
	* other color on request
	** ewo three steps process (high quality alloy, pre-treatment, primer) to

ensure extreme corrosion resistance

Measurements

Model	LPH [m]	↓ ૄ ①	→ ②	Weight [kg]
EL2000	/	0.02	0.46	64.0*
EL3000	/	0.02	0.69	77.0*
EL4000	/	0.02	0.92	90.0*
EL5000	/	0.02	1.15	103.0*
EL6000	/	0.02	1.38	116.0*
	•	① projecte	d windage area [m²]	* telescopic element
		② lateral w	indage area [m²]	included with anchor

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. mA	600	225
LED power max. [W]	400	216

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·

Driver	A-Series	T-Series
Control options	ON DALI US	T8 DALI
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote managemen	t of intelligent luminaire clusters

Performance

Optics	AG01	AG02	AG03	AG04	AH02	AS06	AP07	AS07	AS08	TS11	TP08
MacAdam ellipses (SDCM)					≤ 5 SDCM					≤ 5 S[DCM
•			•	•	•	•		•			

Model	EL2000	EL3000	EL4000	EL5000	EL6000	EL2000	EL3000	EL4000	EL5000	EL6000
Light units	1-2	1-3	1-4	1-5	1-6	1-2	1-3	1-4	1-5	1-6
Lumin. flux [lm]	300-15,100	300-22,700	300-30,300	300-37,900	300-45,500	5,400	8,100	10,800	13,500	16,200

Equipment variations



1 lighting unit


A-Series A-Series Pedestrian path Façade / Accent lighting element Object lighting element



1-3 lighting units

T-Series Pedestrian path Accent lighting element 2-3 lighting units

Product variations



Aluminium polyester powder coated



COR-TEN steel



Combinations with FA

256 257 ewo.com $\mathbf{1}^{\mathrm{st}}$ edition, October 2023; Copyright: © ewo srl/GmbH




EL Wall


EL-W

Recessed walkway lighting







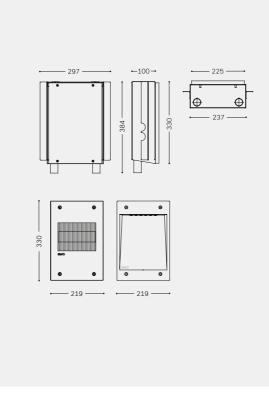

Configurator





Housing		
Housing material	Stainless steel	

Housing	
Housing material	Stainless steel
Glass	Safety glass (ESG)
Mounting options	Wall

Measurements


Model	LPH [m]	J°	→[©	Weight [kg]
EL-W	_/	/	/	6.0

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	600	225
LED power max. [W]	65	36

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	

Driver	A-Series	T-Series
Control options	ON DALI 1-10V S	T8 DALI
Programming	Constant Lumen Output (CLO)	
[optional]	Emergency power supply (AC/DC)	
	Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote manage	ment of intelligent luminaire clusters

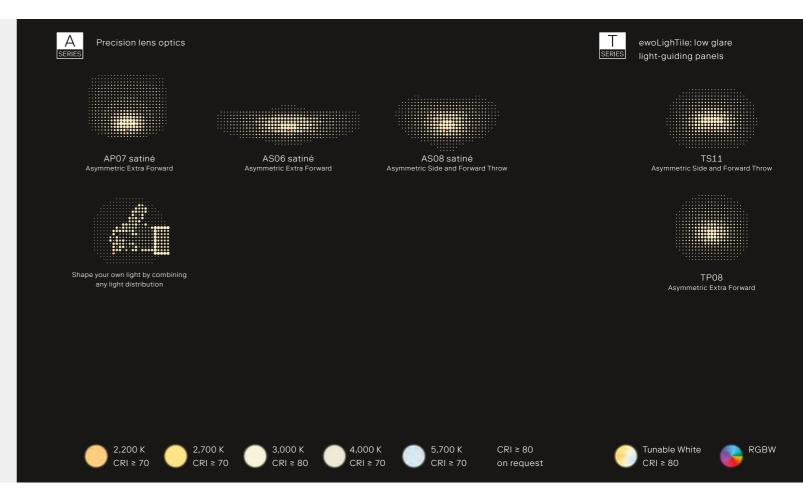

Performance

Optics	AP07 satiné	AS06 satiné	AS08 satiné		TS11	TP08
MacAdam ellipses (SDCM)		≤ 5 SDCM			≤ 5 9	SDCM
Model	EL-W	EL-W	EL-W	EL380	EL710	EL1250
Light units	1	1	1	1	1	1
Lumin. flux [lm]	300-1,100	300-1,100	300-7,500	2,700	2,700	2,700

Models/equipment variations






A-Series Pedestrian path Accent lighting element 1 lighting unit

T-Series Pedestrian path Accent lighting element 2-3 lighting units




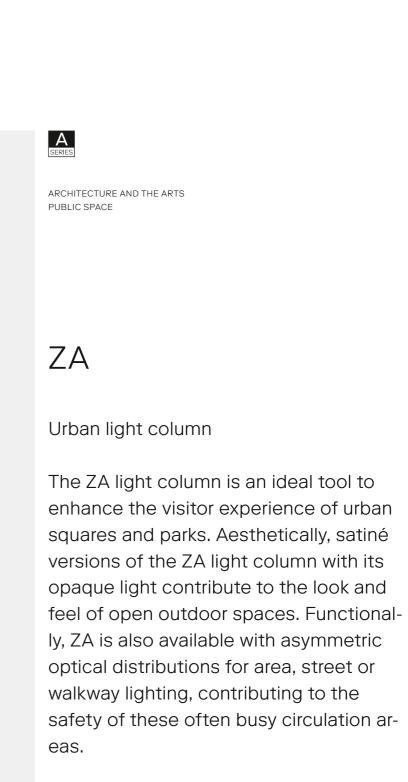

<u>ewo.com</u> ______261



ZA190

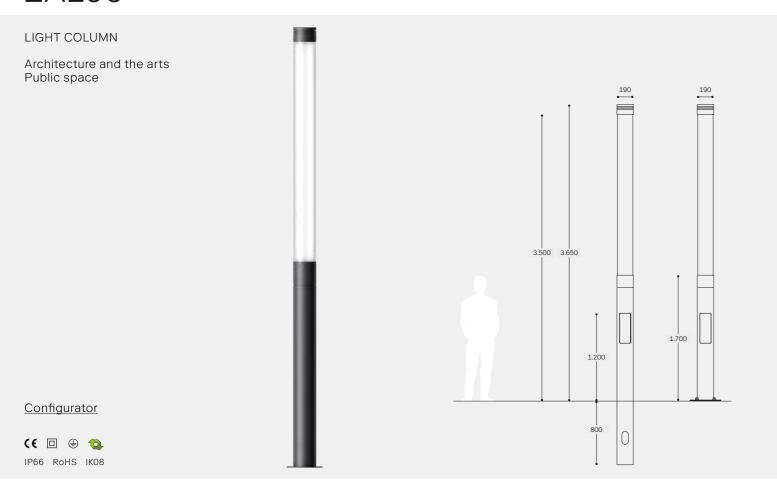

Housing	
Housing	

Housing material	Aluminum
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	Anthracite (DB 703)*
Tube	PMMA tube (satiné)
Maintenance	Flush service door with junction box
	* other color on request
	** ewo three steps process (high quality alloy, pre-treatment, primer) to
	ensure extreme corrosion resistance

Measurements


Model	LPH [m]	1 1	→ ②	Weight [kg] 3	
ZA190	3.5	0.03	0.69	45.0	
	•	① projecte	d windage area [m²]	③ max. weight	
		② lateral wi	indage area [m²]	@ pole included	

Electrical A-Series Protection class 1/II Voltage [V], [Hz] 220-240, 50/60 Current feed max. [mA] 700 LED power max. [W] 36

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•••••	•

Driver	A-Series
Control options	ON DALI 1-10V JS
Programming	Constant Lumen Output (CLO)
[optional]	Emergency power supply (AC/DC)
	Stand-alone
Control accessories	Further accessories on request
Software	connexx light management software for remote management of intelligent luminaire clusters
•••••	

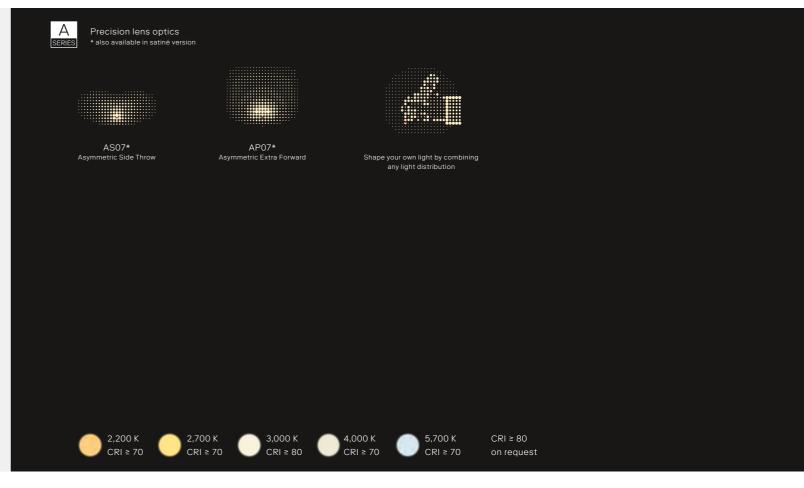


Performance

Optics	AS07	AP07
MacAdam ellipses (SDCM)	≤ 5 SD	CM

Model	ZA190	
Nr. of LEDs	16	
Luminous flux [lm]	1,100-3,700	

<u>ewo.com</u> 1st edition, October 2023; Copyright: © ewo srl/GmbH









RECESSED WALL LUMINAIRES CEILING MOUNT INGROUND LUMINAIRES

IN

Recessed linear lighting system

The IN family of flush mounted recessed linear luminaires can be ground, wall or ceiling mounted and is suitable for both outdoor and indoor spaces. When fitted with T-Series ewoLightTiles for tunable white solutions, this luminaire creates lighting accents well suited for direct view applications such as inground or wall recessed. When fitted with high precision A-Series lenses, IN becomes a powerful linear projector suitable for walkway lighting and wall washing.

265 ewo.com

Shape of Light





PUBLIC SPACE ARFAS RESIDENTIAL AREAS WALKWAYS

ewoLightTile

Light guiding panels, superior visual comfort, patented technology


ewoLightTile provides a precise and homogeneous light distribution as well as minimised glare and backlighting. The individual LED units and the gaps between the ewoLightTiles remain invisible.

Light guide optics with optimised surface

Current feed

100-350 mA

9.6-36.9 W per ewoLightTile Luminous flux up to 2,300 lm per ewoLightTile

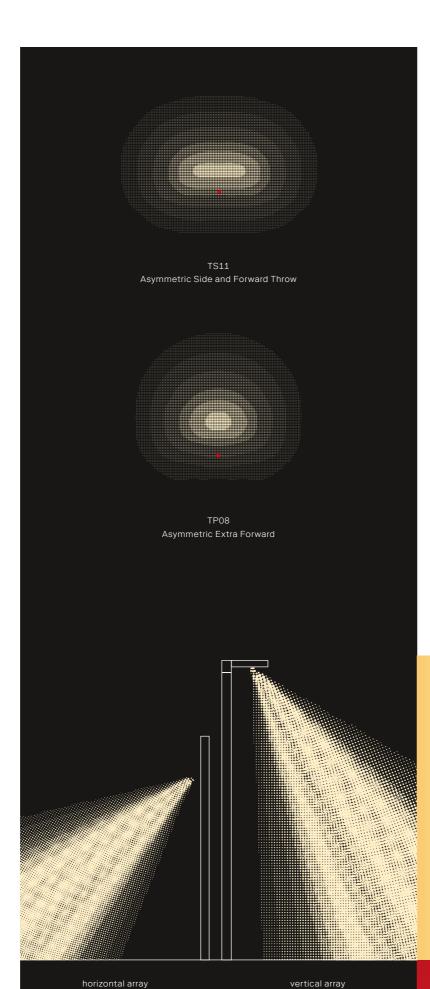


Areas of Application

ewoLightTile is ideal for projects that focus on making people feel safe and comfortable in a number of settings from pathways to residential areas and urban spaces. Combined both horizontally and vertically, ewoLightTile offers asymmetric light distribution and avoids unwanted light dispersion.

Modular Combinations

For any customised requirements, ewoLightTiles can be combined vertically and horizontally. This results in an unlimited number of arrangements along the longitudinal axis or width.

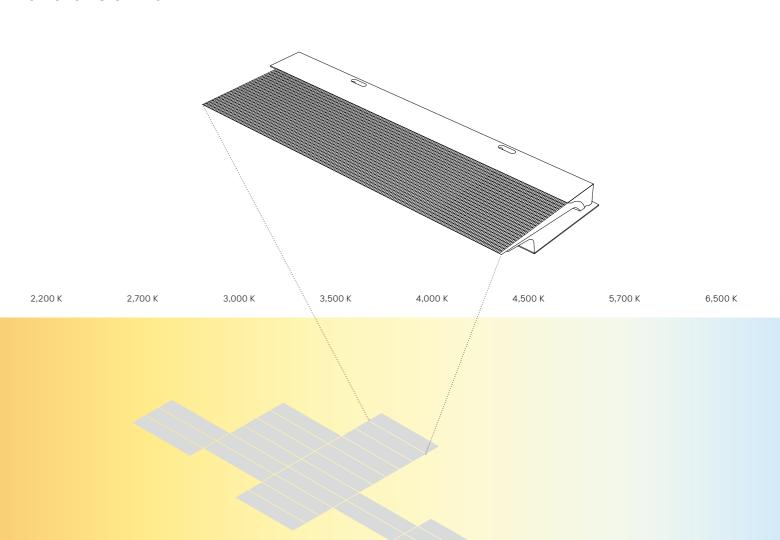


Tunable White CRI ≥ 80

luminous range: 3xLPH







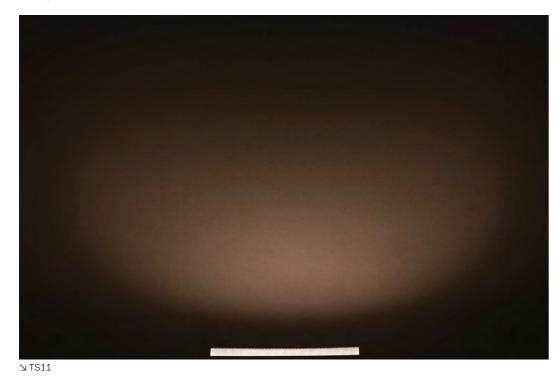

Un confort visuel maximal avec la nouvelle optique plane révolutionnaire ewoLightTile. A fortiori lorsque l'on se trouve à proximité de la source lumineuse, la technologie de lentille garantit une distribution ciblée grâce à sa surface lumineuse large et homogène, qui rend les unités LED complètement invisibles.



BODY OF LIGHT

SHAPE OF LIGHT

::::.

IN

WALL IN1 IN2 IN3

CEILING, GROUND

IN1 IN2 IN3

IN4 IN5




A-Series (single 90° LED row) - V04

T-Series, 1–3 lighting units





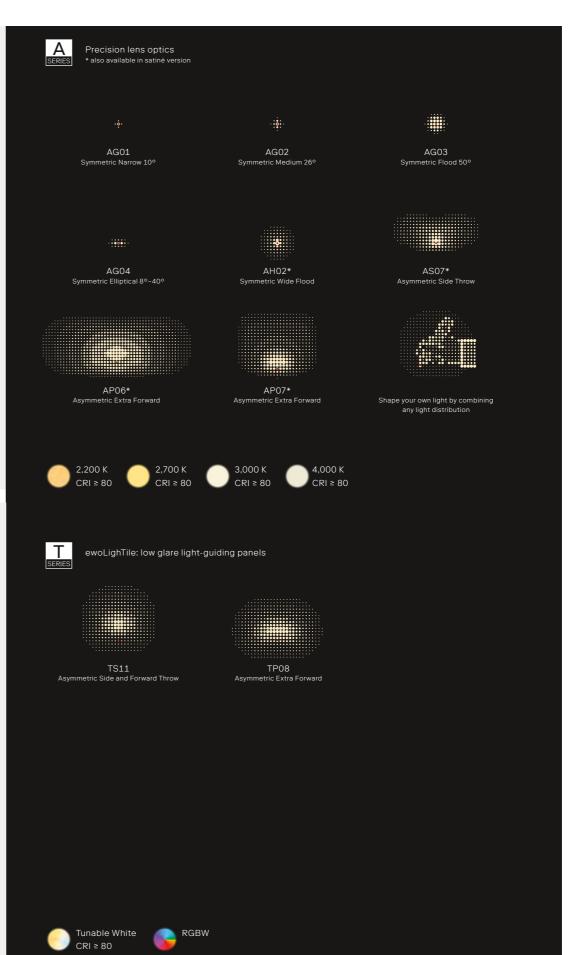



ON/OFF	ON
DALI	DALI
1–10 V	1–10V
Line Switch	LJŚ

Programming options

CLO Constant Lumen Output

AC/DC Emergency power supply

Stand-alone

SERIES

Control protocols

DALI 2 T8

Programming options


Night dimming



WALL IN 1 IN 2 IN 3

For area, walkway or indoor lighting





Configurator





Housing

Housing material	Aluminum
Housing finish	Coated black matt RAL 9005
Glass	Safety glass (ESG)
Mounting options	Wall
	Lighting unit adjustable +/- 5°

Measurements


Model	L1 [mm]	B1 [mm]	Weight [kg] 10	
IN 1	336	86	4.5	
IN 2	496	86	6.5	
IN 3	656	86	8.5	
	•		① max. weight	

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500*	225
LED power max. [W]	31	36
	* IN 2, IN 3: 400 mA	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•••••	

Driver	A-Series	T-Series
Control options	ON LA	T8 DALI
Programming	Constant Lumen Output (CLO)	
[optional]	Emergency power supply (AC/DC)	
	Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote manager	nent of intelligent luminaire clusters

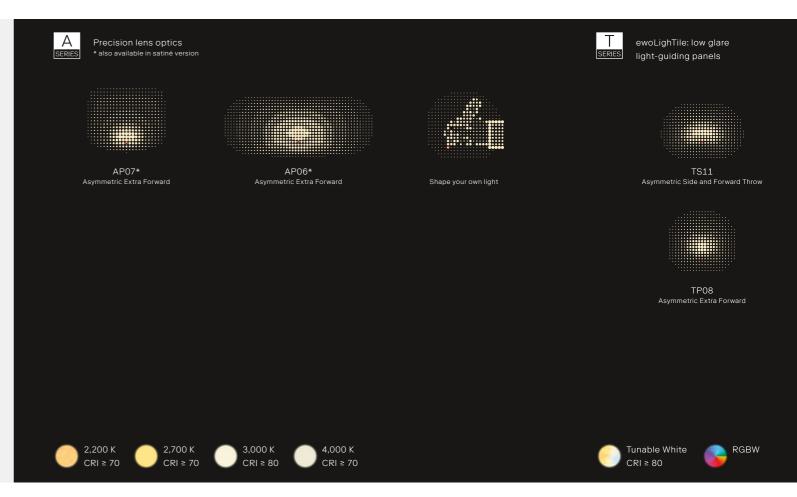

Performance

Optics	AP07	AP06				TS11	TP08
MacAdam ellipses (SDCM)	≤ 3 9	SDCM				≤ 5 S	DCM
	•	-	-		-		
Model	IN 1	IN 2	IN3		IN 1	IN 2	IN 3
Light units	1	2	3	•	1	2	3
Luminous flux [lm]	210-620	410-1,000	620–1,500		900	1,800	2,700

Equipment variations



Accessories





272 273 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH



IN

CEILING, GROUND


IN 1 IN 2

IN 3 IN 4

IN 4 IN 5

For area, walkway or indoor lighting



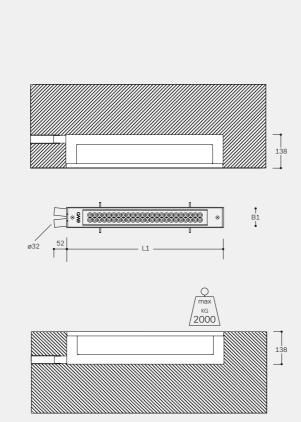

Housing

Configurator

(€ □ ⊕ 🖜 🐠

IP66/IP67 RoHS IK10

Housing material	Aluminum
Housing finish	Coated black matt RAL 9005
Glass	Safety glass (ESG)
Mounting options	Ceiling, ground
	Lighting unit adjustable +/- 5°

Measurements


Model	L1 [mm]	B1 [mm]	Weight [kg]①
IN 1*	337	86	4.5
IN 2*	497	86	6.5
IN 3*	657	86	8.5
IN 4	817	86	10.5
IN 5	977	86	12.5
* IN 1-IN 3 for cei	ling only	••••••••••	① max. weight

Electrical	A-Series	T-Series
Protection class	1/11	I
Voltage [V], [Hz]	220-240, 50/60	220-240, 50/60
Current feed max. [mA]	500*	225
LED power max. [W]	87	60
	* IN 2, 3, 4: 400 mA	
	IN 5: 350 mA	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·



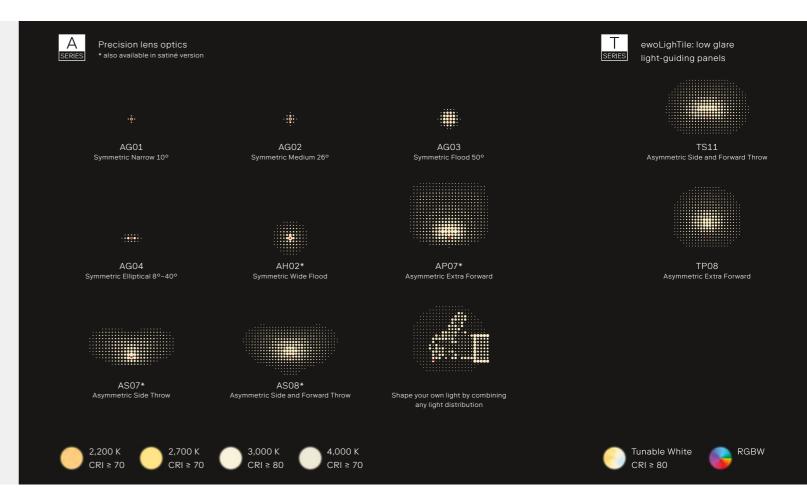

Performance

Optics	AG01	AG02	AG03	AG04	AH02	AP07	AS07	AS08		TS11	TP08
MacAdam ellipses (SDCM)				≤ 3 SDCM						≤ 5 S	DCM
									-		

Model	IN 1	IN 2	IN 3	IN 4	IN 5	IN 1	IN 2	IN 3	IN 4	IN 5
Light units	1	2	3	4	5	1	2	3	4	5
Luminous flux [lm]	340-2,100	670-3,500	1,000-5,300	1,400-7,000	1,700-7,900	900	1,800	2,700	3,600	4,600

Equipment variations







Plasterkit

Stainless steel frame

ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH 275



RAZER

Illuminazione per strade da altezze di montaggio molto basse p.es. ponti



RAL 9005





Configurator





Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating* (ewoECP upon request**)
Finish standard colour	ewo colo* (shutter RAL 9005)
Glass	Polycarbonate cover
Mounting options	wall
Fixing	Stainless steel L-bracket
	* other colo on request
	other colo on request

^{**} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	J 1	→ ^ ②	Weight [kg] 3
RAZER + shielding	0.015*	0.019*	1.0
***************************************	① Projected	windage area [m²]	
	② Lateral wi	ndage area [m²]	
	3 Weight wi	th L-bracket	
	* Tilt 0°		

Electrical	A-Series	
Protection class	11/ 111	
UNominal [VDC]	25.6	
Ucc max. [VDC]	300	
Current max. [mA]	1,000	
LED power [W]	25.6	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options

Driver (external) Monochrome Control Options ON DALL Programming Stand-alone Constant Lumen Output (CLO) Control accessories Further accessories on request



Performance

-85**-**

Distribution	AG01	
Beam angle	=	
MacAdam ellipses (SDCM)	≤ 3 SDCM	
Nr. of LEDs	8	
Luminous flux [lm] (3,000 K)	1,400	

276 1st edition, October 2023; Copyright: © ewo srl/GmbH





PUBLIC SPACE



Recessed handrail lighting system

Handrails appear in areas where public safety is important, such as stairs or before uneven or dangerous terrain.

ID recessed handrail lighting adds an additional safety layer by lighting the potential trip hazards, keeping visitors safe.

ID linear modules are available from one up to four LEDs and are fitted with A–Series high precision lens optics for walkway lighting.










IDstandard

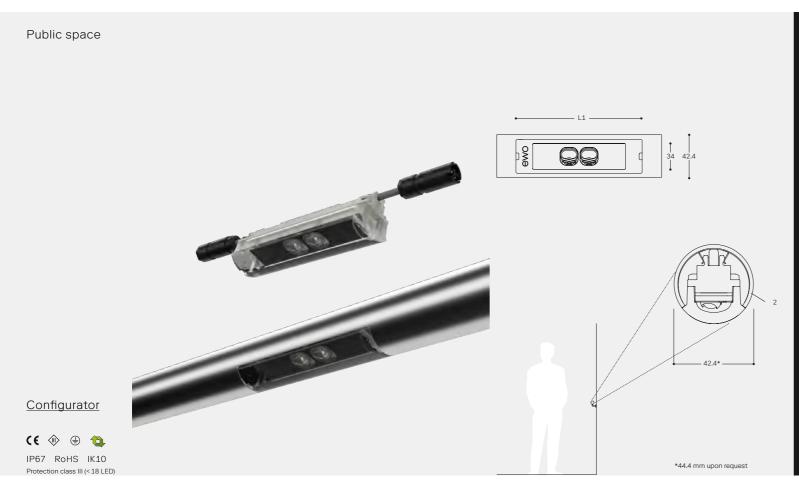

Housing

Housing material	ID1, ID2 and ID4 die-cast aluminium (EN44300)
Housing finish	Aluminium
Cover	ΡΜΜΔ

Measurements


Model	LEDs	L1 [mm]	Weight [kg]①
IDstandard	1-2 LEDs	125	0.18
IDstandard	4 LEDs	166	0.23
-			① max_weight without tube

Electrical	A-Series	
Protection class	11/111	
Voltage [V], [Hz]	=	
Current feed max. [mA]	500	
LED power max. [W]	6.0	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	



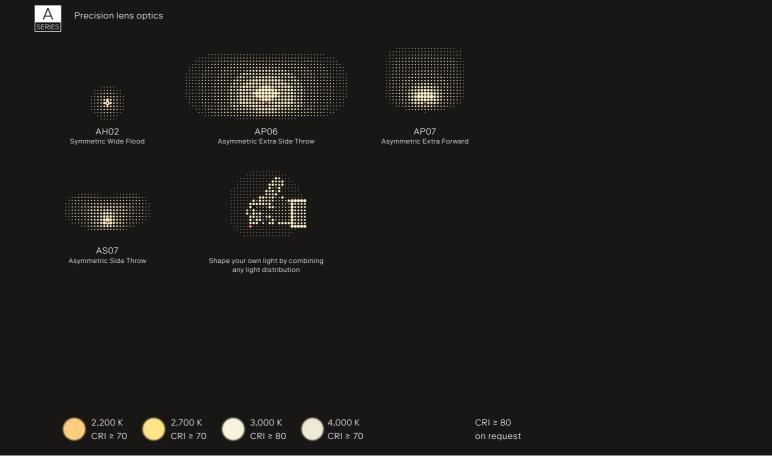

Performance

Optics	AH02	AP06	AP07	AS07	
MacAdam ellipses (SDCM)		≤ 5 S	DCM		

Model	IDstandard	IDstandard	IDstandard
Light units	1	2	4
Luminous flux [lm]	51-162	121-370	242-640

Equipment variations







IDstandard 2 LEDs

282 1st edition, October 2023; Copyright: © ewo srl/GmbH 283





ARCHITECTURE AND THE ARTS PUBLIC SPACE













R-Series

The R-Series family of in-ground projectors represents ewo's solution for architectural recessed lighting. Its clean design and the variety of available sizes make it suitable for a wide range of applications. The availability of lenses including spot, elliptical and flood optics, and the wide range of colour temperature choices, including RGBW, complete an offer dedicated to giving the most beautiful buildings their deserved prominence. With five sizes from 50 mm (single LED) to 200 mm (24 LED) in diameter, even the most demanding applications will find an answer in this product series. The R-Series can be configured with integral or external driver for applications with shallow recess areas.

<u>ewo.com</u> 285

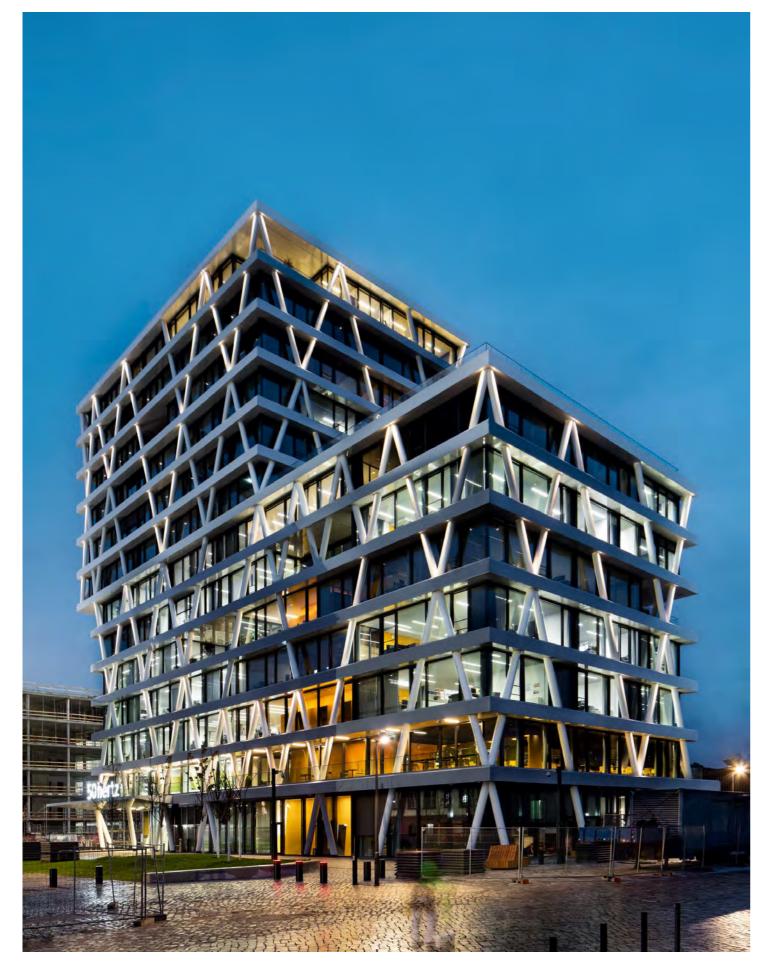

CHURCH LA BASSÉE La Bassée, France, 2019 HDR Germany, Matteo Thun & Partners R-Series

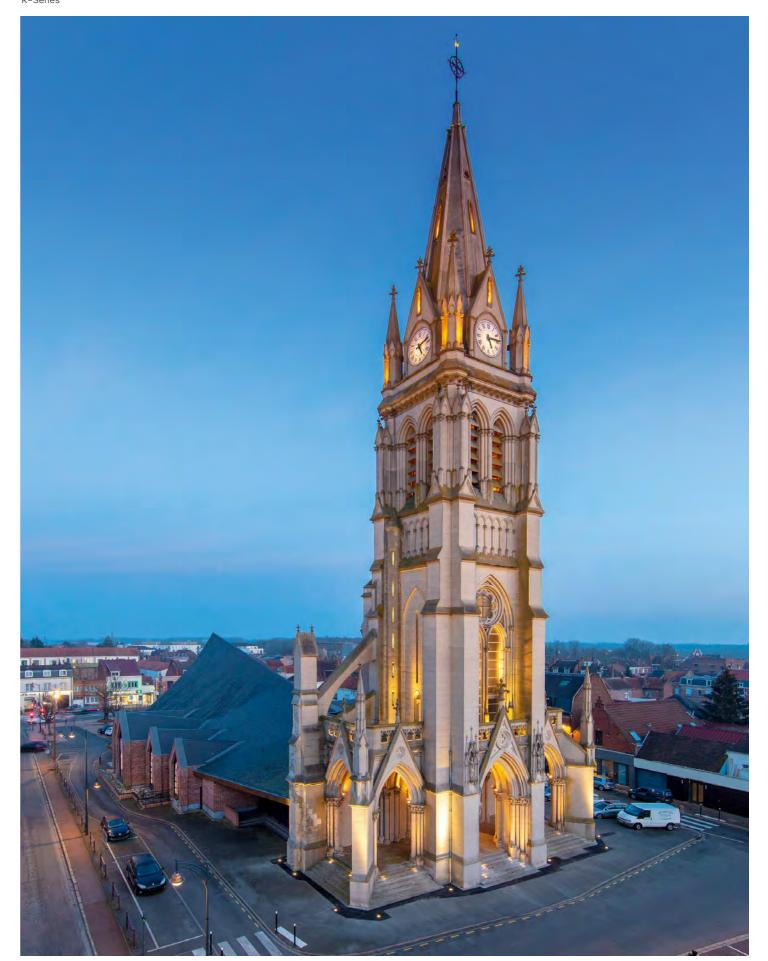



PUBLIC SPACE

UP-Series

Hovering street furniture in timeless design

As far back as 2009, the Norwegian designer team NORWAY SAYS designed a product family for ewo with accent lighting to make urban spaces more appealing and durable.




<u>ewo.com</u>








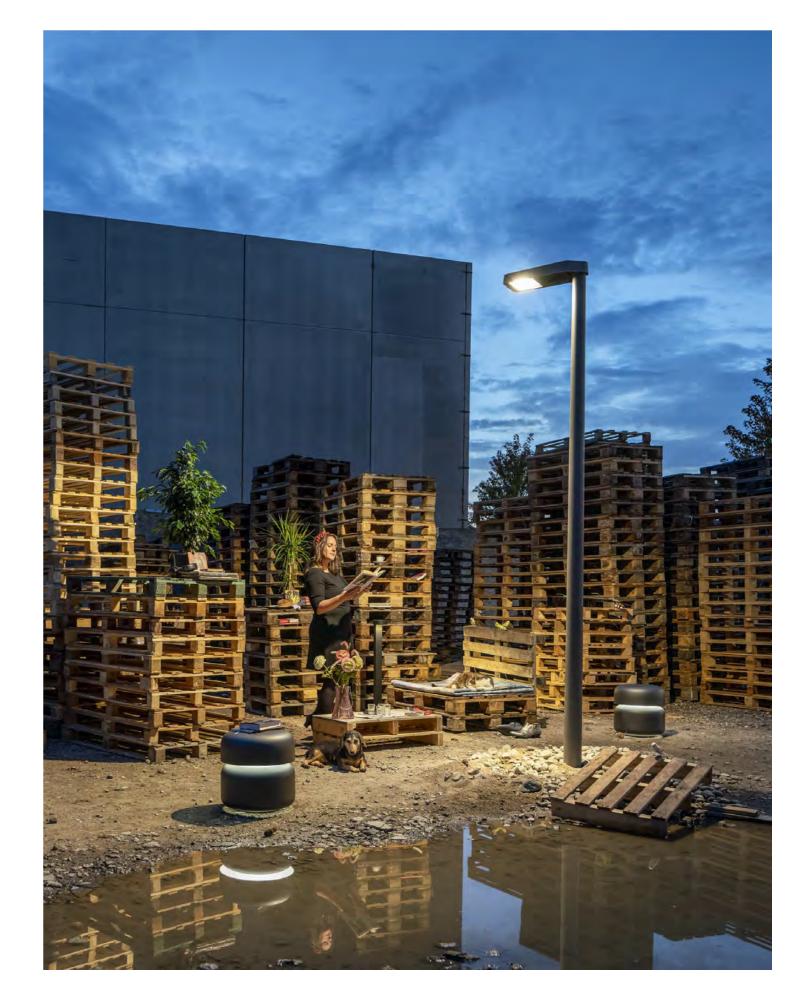




Urban furniture

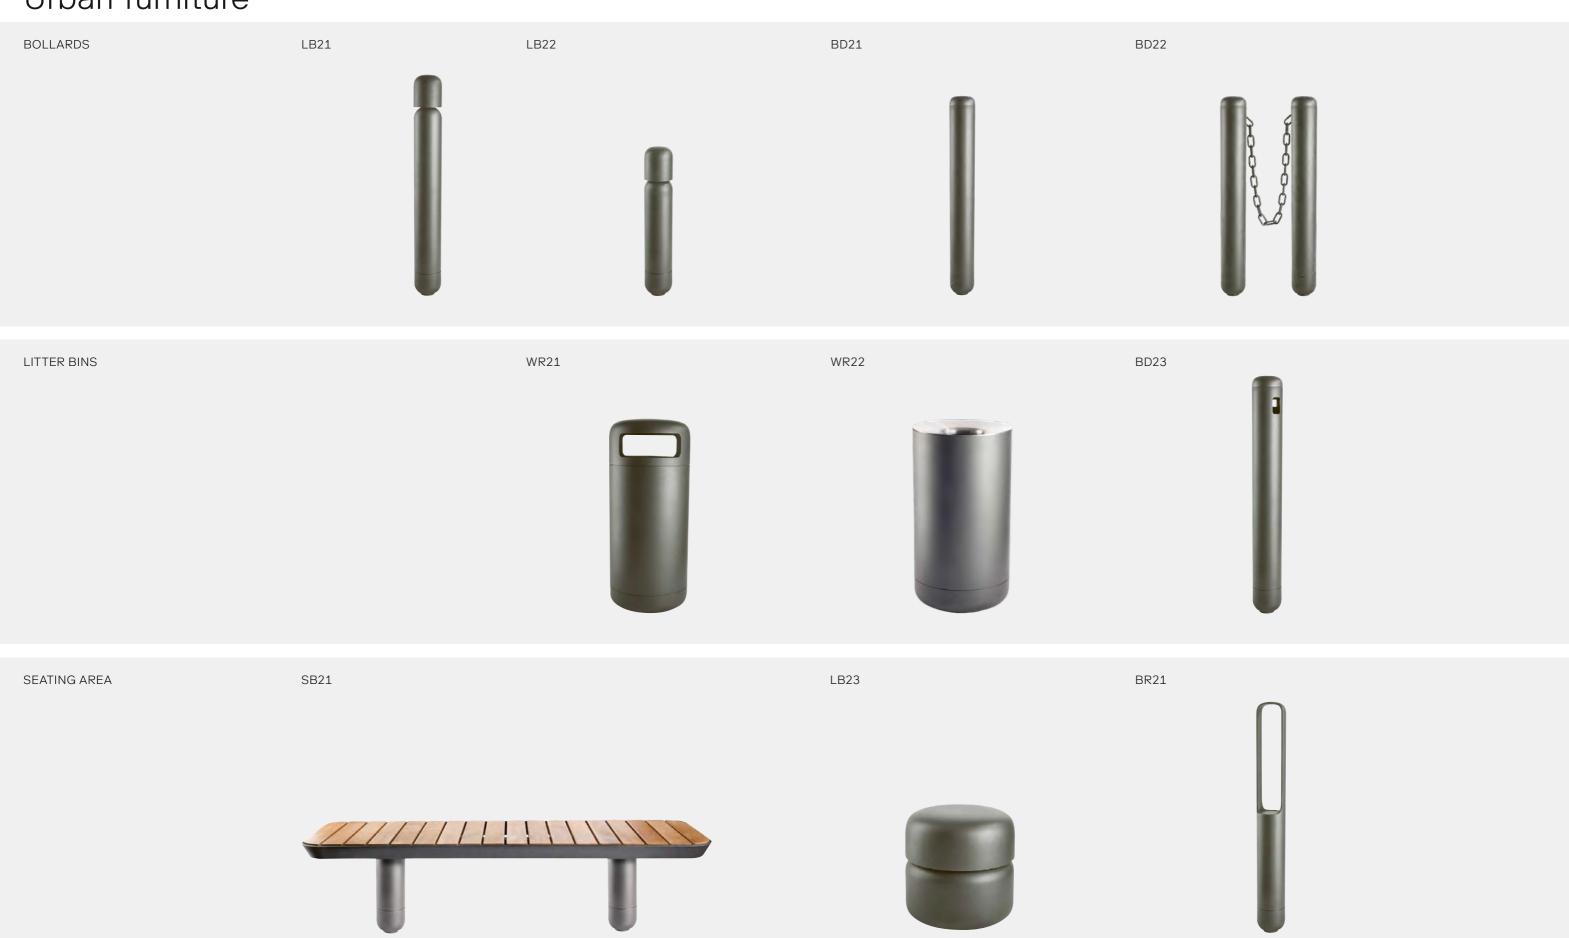




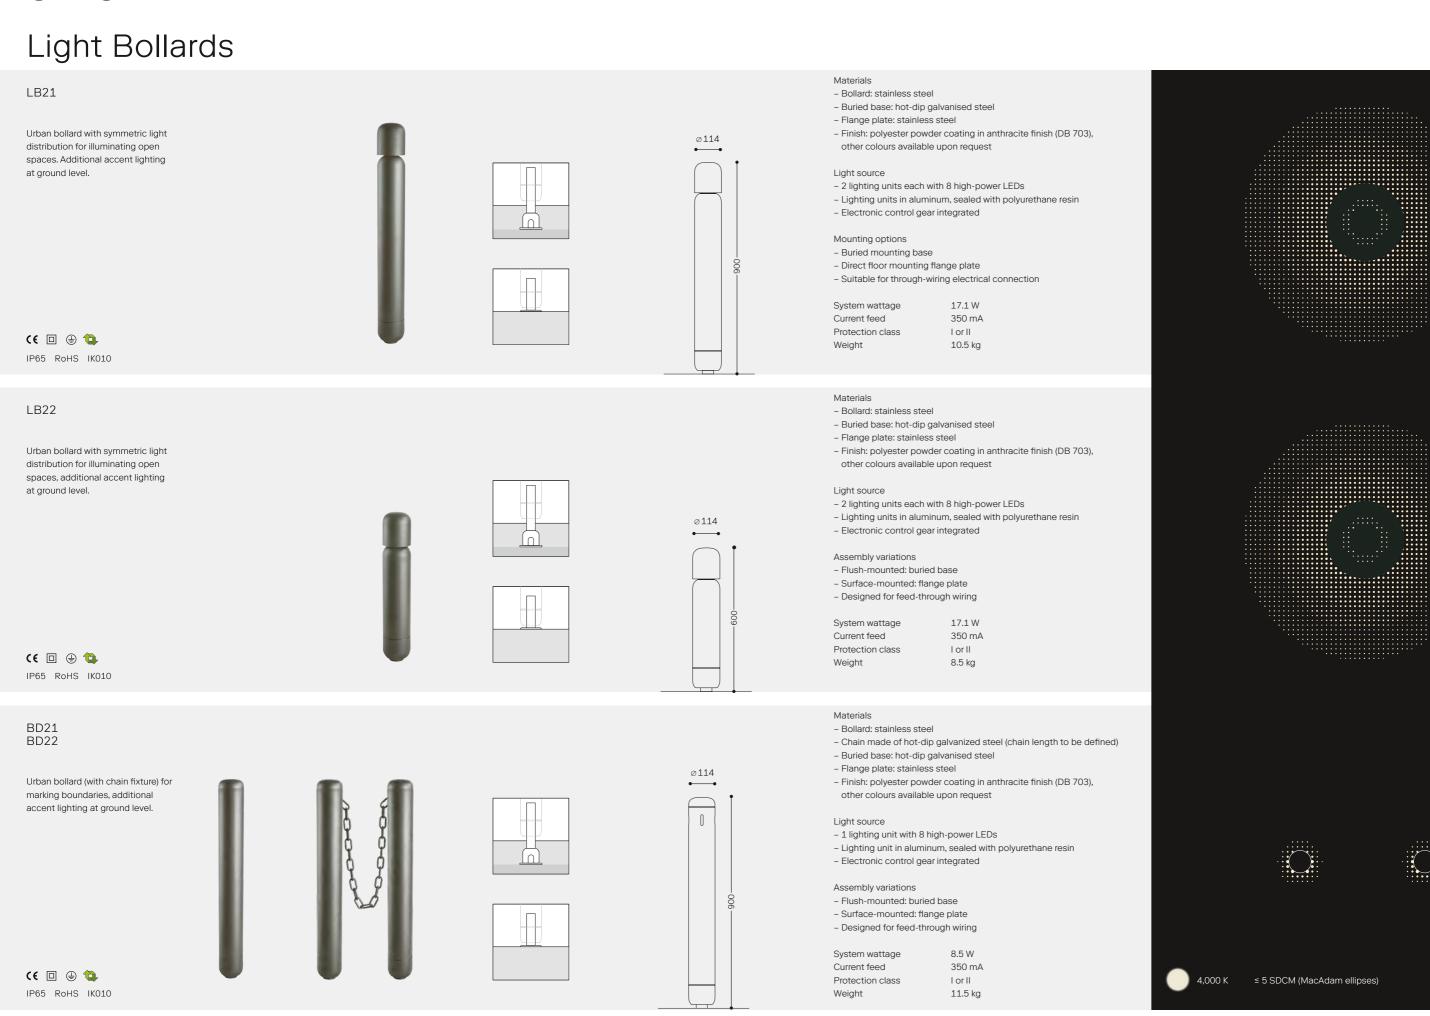

Litter Bins


WR21

Litter bin urban bollard with removable cover, capacity 45 I, additional accent lighting at ground level









Materials

- Container in hot-dip galvanised steel
- Buried base: hot-dip galvanised steel
- Flange plate: hot-dip galvanised steel
- Finish: polyester powder coating in anthracite finish (DB 703), other colours available upon request

Light source

- 1 lighting unit with 16 high-power LEDs
- Lighting unit in aluminum with transparent glass cover
- Electronic control gear integrated

Assembly variations

- Flush-mounted: buried base
- Surface-mounted: flange plate
- Designed for feed-through wiring

17.1 W System wattage I or II




WR22

Litter bin urban bollard with removable cover, capacity 45 I, additional accent lighting at ground level









Materials

- Container in hot-dip galvanised steel
- Upper cover in polished stainless steel
- Buried base: hot-dip galvanised steel
- Flange plate: hot-dip galvanised steel
- Finish: polyester powder coating in anthracite finish (DB 703), other colours available upon request

Light source

- 1 lighting unit with 16 high-power LEDs
- Lighting unit in aluminum with transparent glass cover
- Electronic control gear integrated

Assembly variations

- Flush-mounted: buried base
- Surface-mounted: flange plate
- Designed for feed-through wiring

System wattage 17.1 W 350 mA Current feed Protection class I or II 30 kg Weight

Materials

- Bollard: stainless steel
- Buried base: hot-dip galvanised steel
- Flange plate: stainless steel
- Finish: polyester powder coating in anthracite finish (DB 703), other colours available upon request

- 1 lighting unit with 8 high-power LEDs
- Lighting unit in aluminum, sealed with polyurethane resin - Electronic control gear integrated

Assembly variations

- Flush-mounted: buried base
- Surface-mounted: flange plate
- Designed for feed-through wiring

System wattage 8.5 W Current feed 350 mA Protection class I or II Weight 11.5 kg


BD23


(€ □ ⊕ 🖜

ashtray, removable cover to aid emptying, additional accent lighting at ground level






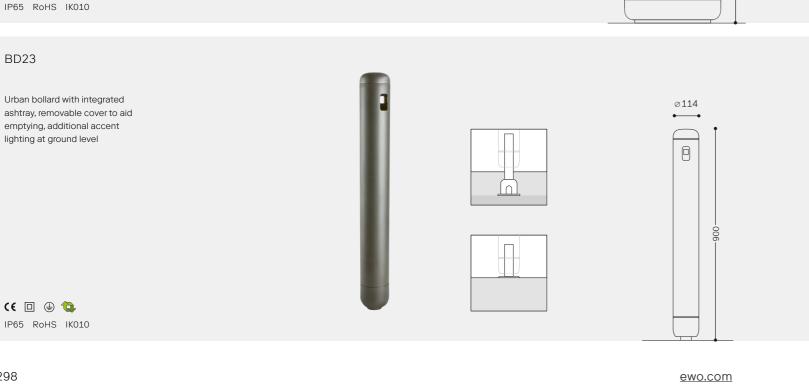


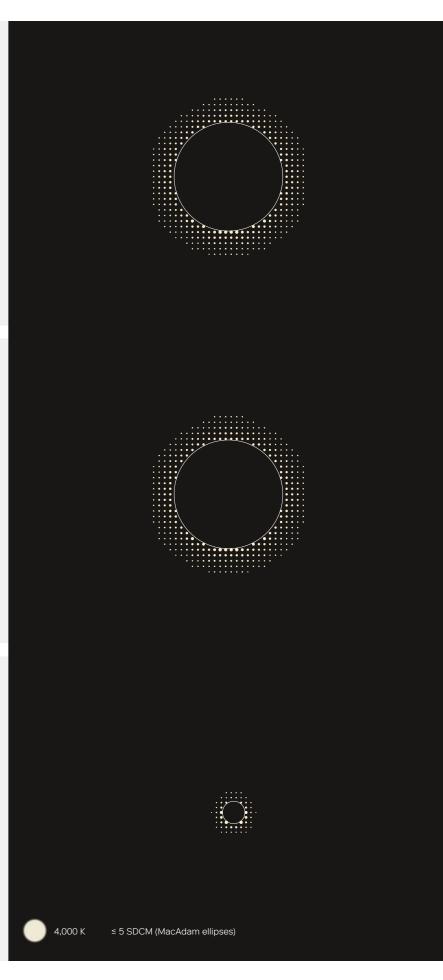



Seating area

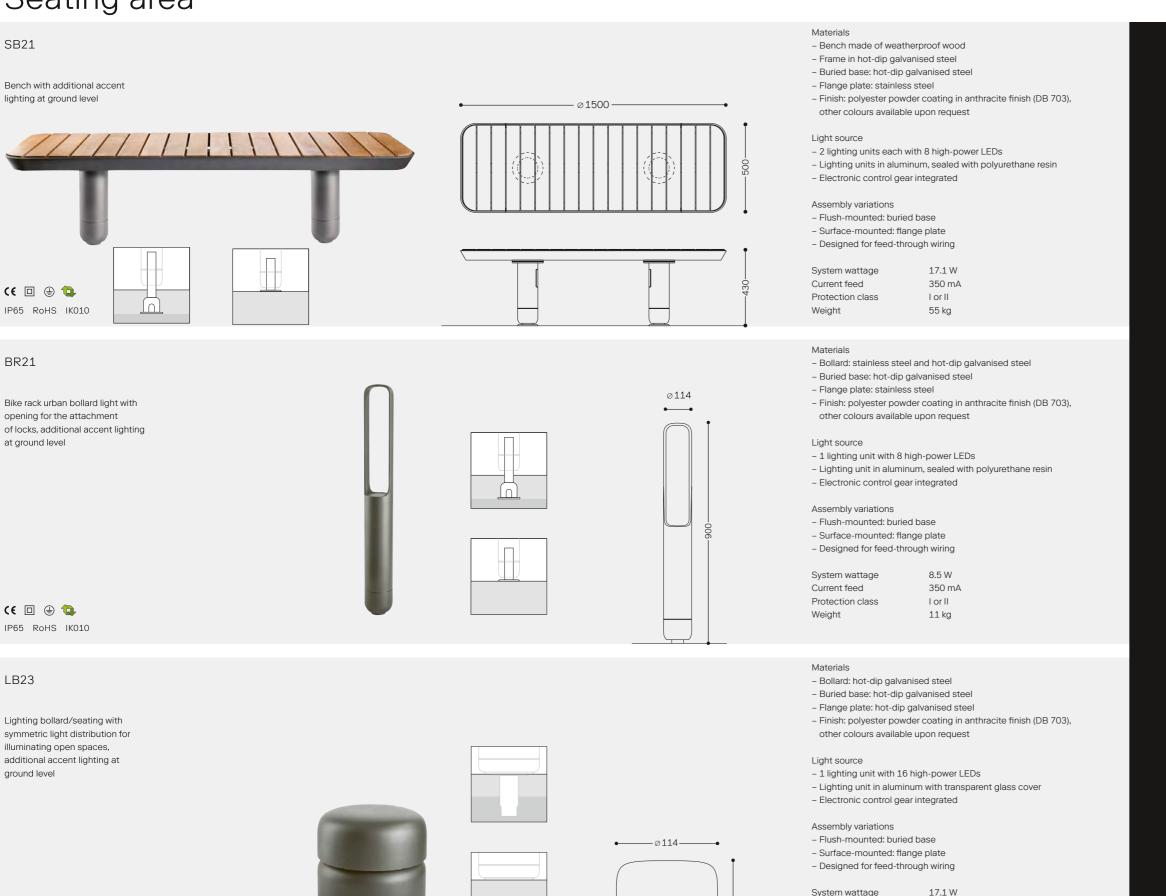

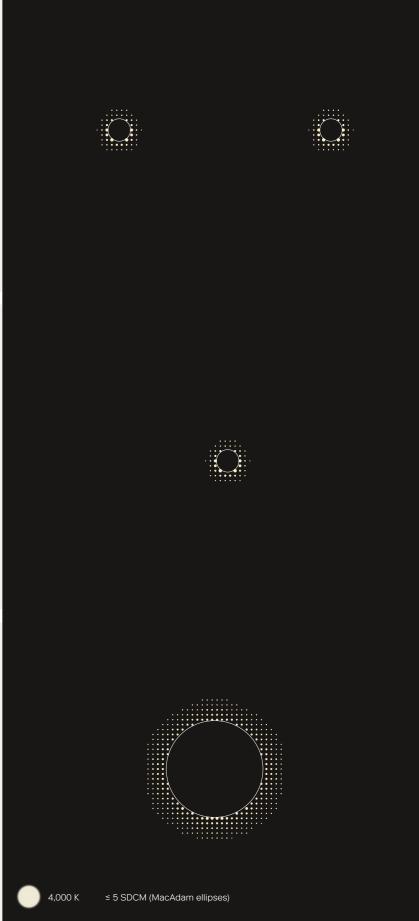





350 mA

I or II

12 kg

System wattage

Protection class

Current feed

Weight

R130

::::.













8 high-power LEDs





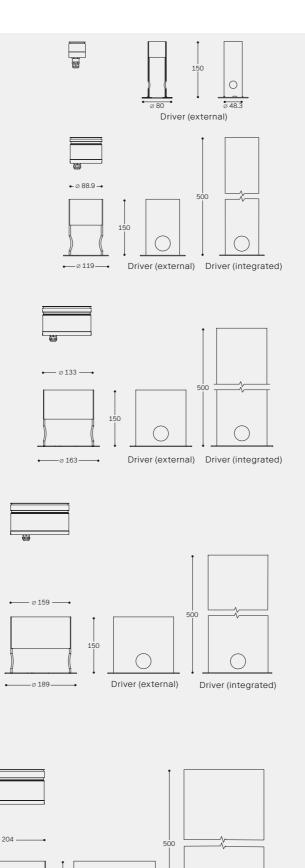

—ø 234 — Driver (external)

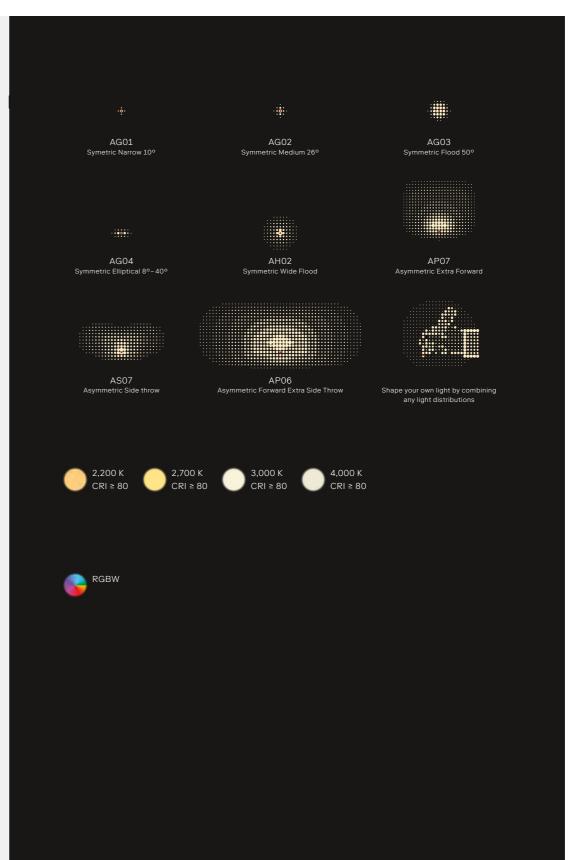



Control	protocols
Contion	protocois

·	
ON/OFF	ON
DALI 2	DALI
1–10 V	1-10V
Line Switch	LJŚ

Programming options

CLO	Constant Lumen Output
AC/DC	Emergency power supply

Stand-alone

RGBW

Control protocols

ON/OFF	OFF
DALI 2	DALI
DMX-RDM	DMX

Driver (integrated)



In-ground luminaires
Architectural lighting
Object and effect lighting
Floor mounting



Configurator



IP67 RoHS IK10

Housing

Housing material	Aluminum, stainless steel
Housing finish	Internally black matt coated RAL 9005
Cover	Tempered safety glass (3,000 kg pressure load capacity)
Screws	Stainless steel
Cable	Pre-wired supply cable 0.50 m, complete with water stop
	device, cable gland

Measurements

Model		Weight [kg]①
R50	without driver	0.5
		① max. weight

Electrical	A-Series	
Protection class	Ш	
Voltage [V], [Hz]	-	
Current feed max. [mA]	500	
LED power max. [W]	1.5	
	•	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·

Driver (external) A-Series

Control options	ON DALI 1-10V JS
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone
Control accessories Software	Further accessories on request connexx light management software for remote management of intelligent luminaire clusters



Performance

Optics	AG01	AG02	AG03	AG04	AH02	
Beam angle	10°	26°	50°	10-40°	60°	
MacAdam ellipses (SDCM)			≤ 3 SDCM			
	•	•	•	•••••••••••••••••••••••••••••••••••••••		
Model	R50					
Nr. of LEDs	1					
Luminous flux [lm]	50-150					
······································		•	· · · · · · · · · · · · · · · · · · ·	·····	······	

Equipment variations




R50 without internal driver

<u>ewo.com</u> 1st edition, October 2023; Copyright: © ewo srl/GmbH



In-ground luminaires
Architectural lighting
Object and effect lighting
Floor mounting





Configurator



IP67 RoHS IK10

Housing

Housing material	Aluminum, stainless steel
Housing finish	Internally black matt coated RAL 9005
Cover	Tempered safety glass (3,000 kg pressure load capacity)
Screws	Stainless steel
Cable	Pre-wired supply cable 0.50 m, complete with water stop device, cable gland
Lighting unit	Steplessly adjustable ± 15° in all directions

Measurements


Model		Weight [kg]①
R90	without driver	2.0
R90	complete with driver	5.5
		① max. weight

Electrical	A-Series	RGBW
Protection class	17117111	17117111
Voltage [V], [Hz]	220-240, 50/60*	Driver external
Current feed max. [mA]	500	500
LED power max. [W]	6.1	6.1
	* with integrated driver	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	··· ·

Driver (external)	A-Series	RGBW
Control options	ON DALI 1-10V JS	ON OFF DALI DMX
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote management of intell	

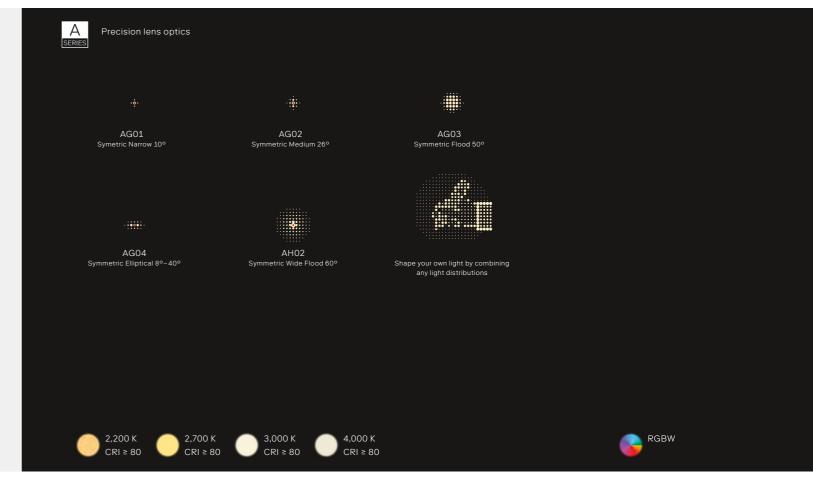

Performance

Optics	AG01	AG02	AG03	AG04	AH02				
Beam angle	10°	26°	50°	10-40°	60°				
					.		<u>.</u>	•	
MacAdam ellipses (SDCM)		•	≤ 3 SDCM		.	······		······	
Model	R90								
	R90 4					<u>.</u>			

Equipment variations



906 1st edition, October 2023; Copyright: © ewo srl/GmbH



In-ground luminaires Architectural lighting Object and effect lighting Floor mounting



Configurator



IP67 RoHS IK10

Housing

Measurements

Operating conditions

Housing material	Aluminum, stainless steel
Housing finish	Internally black matt coated RAL 9005
Cover	Tempered safety glass (3,000 kg pressure load capacity)
Screws	Stainless steel
Cable	Pre-wired supply cable 0.50 m, complete with water stop
	device, cable gland
Lighting unit	Steplessly adjustable ± 15° in all directions

Model		Weight [kg]①
R130	without driver	3.5
R130	complete with driver	8.5
		① max. weight

•— Ø 133 —•


•——∅163——•

Electrical	A-Series	RGBW
Protection class	1/11/111	17117111
Voltage [V], [Hz]	220-240, 50/60*	Driver external
Current feed max. [mA]	500	500
LED power max. [W]	12.0	12.0
***************************************	* with intograted driver	······································

/ III	Lif
xternal	
00	
Λ	

	Lifetime	Visit the configurator for specific lifetime options
al		

Driver (external)	A-Series	RGBW
Control options	ON OFF DALI 1-10V JS	ON DALI DMX
Programming	Constant Lumen Output (CLO)	
[optional]	Emergency power supply (AC/DC)	
	Stand-alone	
Control accessories	Further accessories on request	-
Software	connexx light management software for remote management of	intelligent luminaire clusters

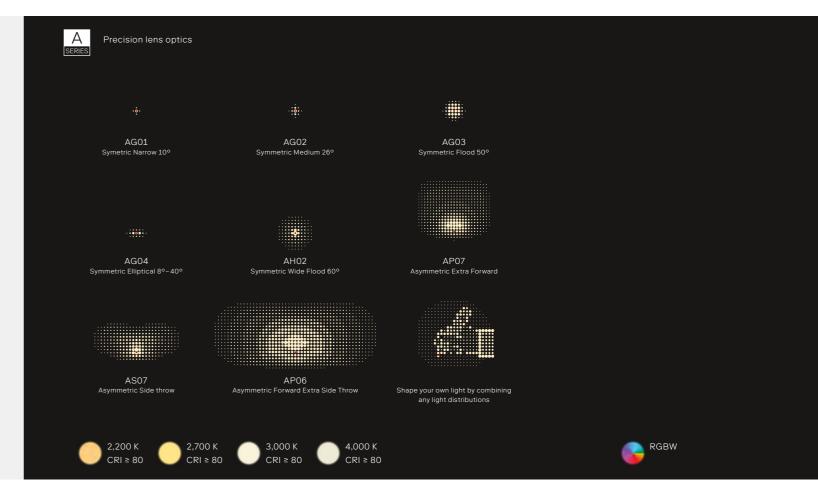

Performance

Optics	AG01	AG02	AG03	AG04	AH02	AP07	AS07	AP06	
Beam angle	10°	26°	50°	10 – 40°	60°	-	-	-	
MacAdam ellipses (SDCM)				≤ 3 S	DCM				
		•	•	•••••••••••••••••••••••••••••••••••••••		•	•	•••••••••••••••••••••••••••••••••••••••	
Model	R130							.	
Nr. of LEDs	8								

Equipment variations



308 309 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH



In-ground luminaires Architectural lighting Object and effect lighting Floor mounting





• Ø 189 —

Configurator



IP67 RoHS IK10

Housing

Housing material	Aluminum, stainless steel
Housing finish	Internally black matt coated RAL 9005
Cover	Tempered safety glass (3,000 kg pressure load capacity)
Screws	Stainless steel
Cable	Pre-wired supply cable 0.50 m, complete with water stop device, cable gland
Lighting unit	Steplessly adjustable ± 15° in all directions

Measurements


Model		Weight [kg]①
R160	without driver	6.5
R160	complete with driver	10.5
		① max. weight

Electrical	A-Series	RGBW
Protection class	17117111	17117111
Voltage [V], [Hz]	220-240, 50/60*	Driver external
Current feed max. [mA]	400	400
LED power max. [W]	19.0	19.0
	* with integrated driver	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•	···•



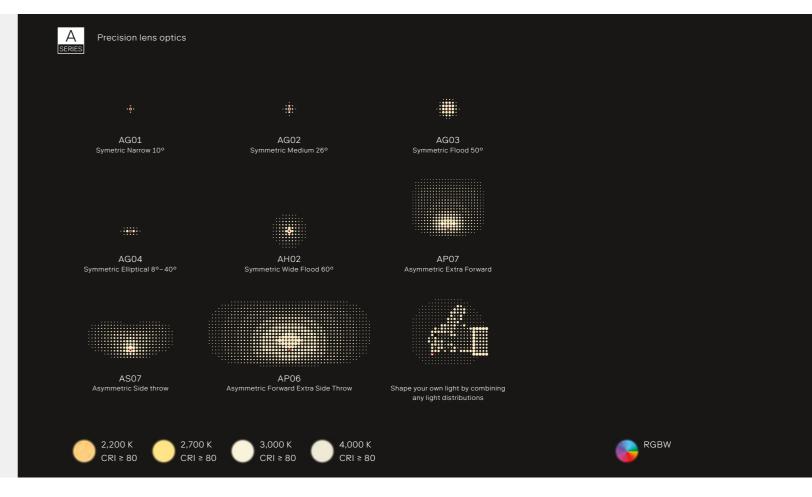

Performance

Optics	AG01	AG02	AG03	AG04	AH02	AP07	AS07	AP06	
Beam angle	10°	26°	50°	10 – 40°	60°	-	-	-	
MacAdam ellipses (SDCM)	-		•	≤3S		<u></u>	•	•	
	·······		•			•	•	• • • • • • • • • • • • • • • • • • • •	
Model	R160								
Nr. of LEDs	16								
Luminous flux [lm]	620–2,020								

Equipment variations



810 and a street edition, October 2023; Copyright: © ewo srl/GmbH



In-ground luminaires Architectural lighting Object and effect lighting Floor mounting



Configurator



IP67 RoHS IK10

Housing

Housing material	Aluminum, stainless steel
Housing finish	Internally black matt coated RAL 9005
Cover	Tempered safety glass (3,000 kg pressure load capacity)
Screws	Stainless steel
Cable	Pre-wired supply cable 0.50 m, complete with water stop
	device, cable gland
Lighting unit	Steplessly adjustable ± 15° in all directions

Measurements

•———∅ 234——•


Model		Weight [kg]①
R200	without driver	7.5
R200	complete with driver	12.0
		① max. weight

Electrical	A-Series	RGBW
Protection class	1711	1/11
Voltage [V], [Hz]	220-240, 50/60*	Driver external
Current feed max. [mA]	400	400
LED power max. [W]	29.0	29.0
	* with integrated driver	•

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
***************************************	··· ·

Driver (external)	A-Series	RGBW
Control options	ON DALI 1-10V S	ON DALI DMX
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connexx light management software for remote managem	

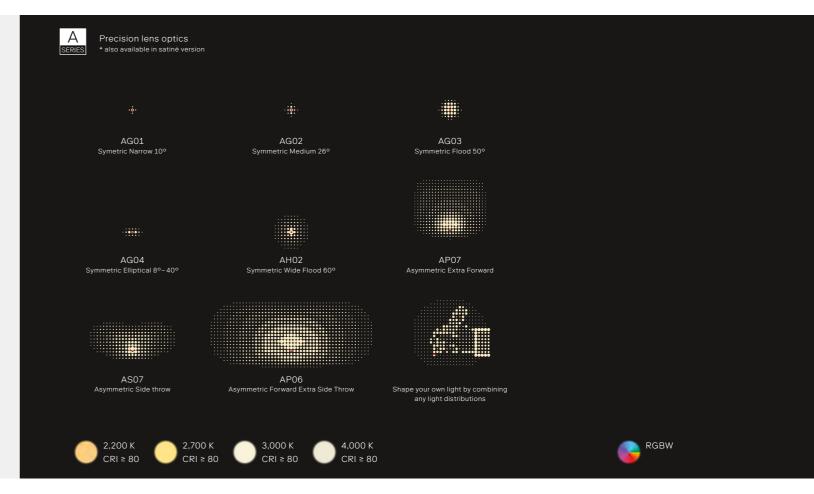

Performance

Optics	AG01	AG02	AG03	AG04	AH02	AP07	AS07	AP06	
Beam angle	10°	26°	50°	10 – 40°	60°	-	-	-	
MacAdam ellipses (SDCM)				≤ 3 S	DCM				
Model	R200								
Nr. of LEDs	24								•••••••••••••••••••••••••••••••••••••••
Luminous flux [lm]	930-3,030	•							


Equipment variations



912 1st edition, October 2023; Copyright: © ewo srl/GmbH




Poles

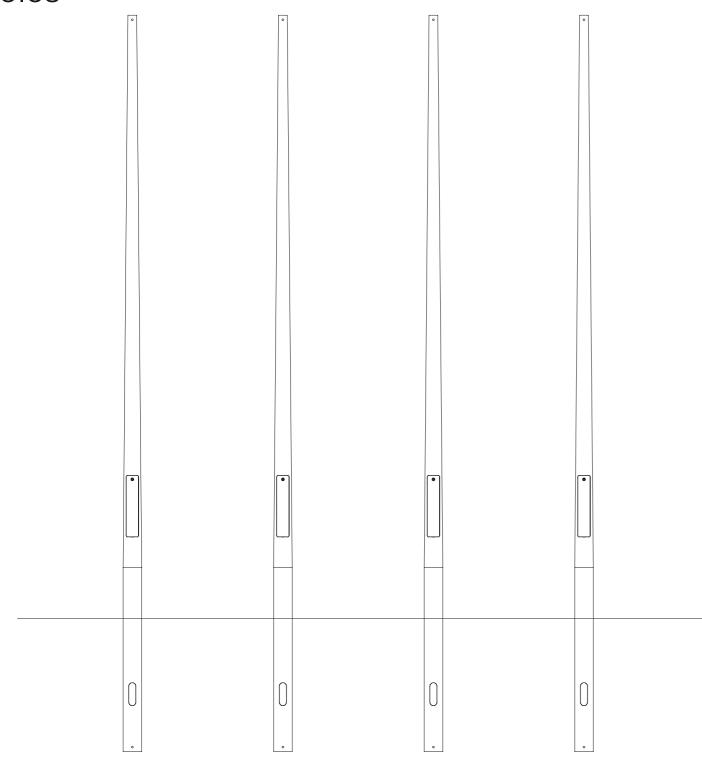

ewo develops complete lighting solutions. These also include the production of poles. In so doing, we ensure the ideal interaction of the individual components, from the mechanical interfaces to the matching finish. Changes to the mounting heights are effortless, and with additional adaptations such as the application of revised openings or special mounting variations, we are just as flexible. Additionally, at our facilities in Kurtatsch/Cortaccia as well as our metal manufacturing plant that is still active in Sarnthein, we create custom pole constructions with a great demand upon the creative and handcrafted qualities.

All of the poles meet high standards of quality. The light poles are certified according to the European standard EN 40-5. Welding parameters as well as other requirements that are essential to the structural engineering are tested during regular independent audits.

Cylindrical Poles

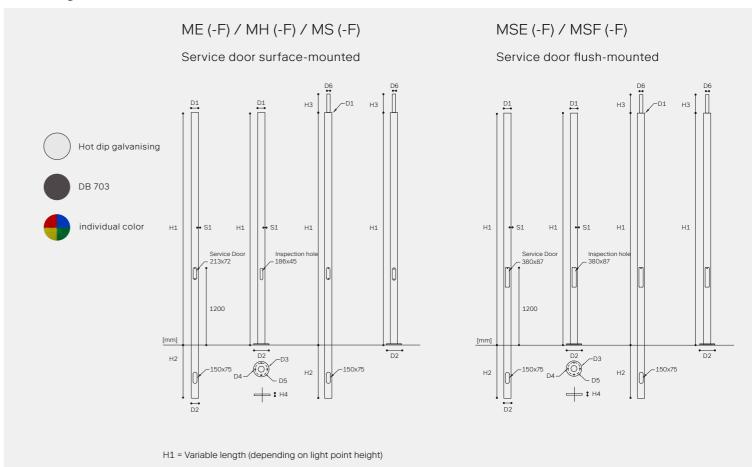

ME (-F) / MH (-F) / MS (-F)

Pole material	steel Fe510C secondo UNI EN 10219 S355JO
Processing	without any longitudinal seam
Finish	Hot-dip galvanized steel/ Polyester powder
surface	coating (ewoECP su richiesta*)
Mounting options	Buried base or with flange

MSE (-F) / MSF (-F)

Pole material	steel Fe510C secondo UNI EN 10219 S355JO
Processing	without any longitudinal seam
Finish	Hot-dip galvanized steel/ Polyester powder
surface	coating (ewoECP su richiesta*)
Mounting options	Buried base or with flange

15

13.5

240

186

21

MSF (-F)	133.0	76	1,000 (0)	85	240	186	21	15	4	13.5
MSE (-F)	114.3	/	800 (0)	/	240	186	21	15	4	12.8
MSE1 (-F)	114.3	89	800 (0)	140	240	186	21	15	4	12.8
MSE2 (-F)	114.3	76	800 (0)	85	240	186	21	15	4	12.8
MSF4 (-F)	133.0	114	800 (0)	90	240	186	21	15	4	13.5
MSF8 (-F)	133.0	/	1,000 (0)	/	240	186	21	15	4	13.5
MSF9 (-F)	133.0	/	1,200 (0)	/	240	186	21	15	4	13.5
MSF10 (-F)	133.0	114	1,200 (0)	90	240	186	21	15	4	13.5
MSF11 (-F)	133.0	/	800 (0)	/	240	186	21	15	4	13.5
MSF13 (-F)	133.0	114	1,000 (0)	90	240	186	21	15	4	13.5

314 315

MS11 (-F)

133.0

114,3

800 (0)

^{*} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Pole D1 D6 H2 НЗ D3 D5 D4 Н4 S1 kg/m MH1 (-F) 114.3 88,9 800 (0) 240 21 140 186 15 12.8 ME1 (-F) 114.3 800 (0) 240 186 21 15 12.8 MS (-F) 133.0 1,000 (0) 240 186 21 15 13.5 MH4 (-F) 114.3 76,1 800 (0) 85 240 186 21 15 12.8 MS2 (-F) 133.0 114,3 1,000 (0) 90 240 186 21 15 13.5 MS4 (-F) 133.0 240 1,200 (0) 186 21 15 13.5 MS6 (-F) 133.0 114,3 1,200 (0) 240 186 21 15 13.5 MS8 (-F) 133,0 76,1 1,000 (0) 85 240 186 21 15 13.5 MS10 (-F) 133.0 800 (0) 240 186 21 15 13.5




Conical poles

Hot dip galvanising



MKG (-F) / M-DFC

Service door flush-mounted

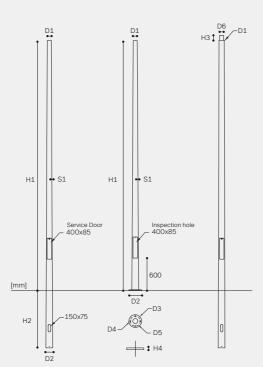


MKG (-F) / M-DFC (-F) not aimed at the Italian market

Pole material	steel HSP 275 JR UNI EN 10025
Processing	without any longitudinal seam
Finish	Hot-dip galvanized steel/ Polyester powder
surface	coating (ewoECP su richiesta*)
Mounting options	Buried base or with flange

^{*} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Pole	H1	Н3	D1	H2	D2	D6	D3	D5	D4	H4	S1	kg
MKG-01 (-F)	3,500	/	60	800 (0)	114.3	/	240	186	21	15	3.4	35.9 (32.8)
MKG-02 (-F)	4,000	/	60	800 (0)	127.0	/	240	186	21	15	3.6	45.6 (41.2)
MKG-03 (-F)	4,500	/	60	800 (0)	127.0	/	240	186	21	15	3.6	50.0 (45.3)
MKG-04 (-F)	5,000	/	60	800 (0)	127.0	/	240	186	21	15	3.6	54.3 (49.9)
MKG-05 (-F)	5,500	/	60	800 (0)	127.0	/	240	186	21	15	3.6	58.7 (54.2)
MKG-06 (-F)	6,000	/	60	800 (0)	127.0	/	240	186	21	15	3.6	63.1 (58.6)
MKG-07 (-F)	4,000	/	76	800 (0)	127.0	/	240	186	21	15	3.6	48.3 (43.9)
MKG-08 (-F)	5,000	/	76	800 (0)	127.0	/	240	186	21	15	3.6	57.8 (53.3)
MKG-09 (-F)	6,000	/	76	800 (0)	127.0	/	240	186	21	15	3.6	67.8 (62.8)
MKG-10 (-F)	7,000	/	76	1,000 (0)	152.4	/	325	272	21	15	4.0	99.5 (93.1)
MKG-11 (-F)	8,000	/	76	1,000 (0)	152.4	/	325	272	21		4.0	111.3 (104.9)
MKG-12 (-F)	9,000	/	76	1,200 (0)	168.3	/	325	272	21		4.0	134.9 (123.7)
MKG-13 (-F)	10,000	/	76	1,200 (0)	168.3	/	325	272	21		4.0	147.6 (136.4)
M-DFC-13	5,000	90	97	800	127.0	76	/	/	21		3.6	57.8
M-DFC-14	6,000	90	97	800	127.0	76	/	/	21		3.6	67.2
M-DFC-15	7,000	90	97	1,000	152.4	76	/	/	21		4.0	99.5

Conical poles

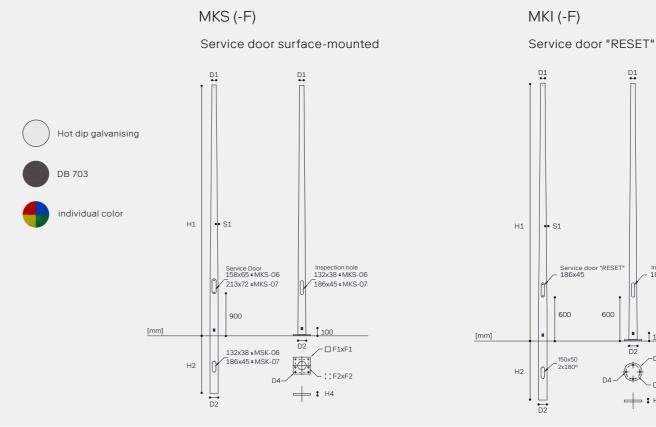

MKS (-F)

Pole material	steel S235 JR UNI EN 10025
Processing	visible longitudinal weld seam
Finish	Hot-dip galvanized steel/ Polyester powder
surface	coating (ewoECP su richiesta**)
Mounting options	Buried base or with flange

MKI (-F) dedicated to the Italian market

Pole material	steel S275JR UNI EN 10025
Processing	without any longitudinal seam
Finish	Hot-dip galvanized steel/ Polyester powder
surface	coating (ewoECP su richiesta*)
Mounting options	Buried base or with flange


^{*} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Pole	H1	D1	H2	D2	F1×F1	F2×F2	D4	H4	S1	kg
MKS-01 (-F)	3,000	60	500 (0)	95 (90)	260 × 260	200 × 200	22	10	3	21 (23)
MKS-02 (-F)	3,500	60	500 (0)	100 (95)	260 × 260	200 × 200	22	10	3	24 (27)
MKS-03 (-F)	4,000	60	500 (0)	105 (100)	260 × 260	200 × 200	22	10	3	28 (31)
MKS-04 (-F)	4,500	60	500 (0)	110 (105)	260 × 260	200 × 200	22	10	3	32 (35)
MKS-05 (-F)	5,000	60	500 (0)	115 (110)	260 × 260	200 × 200	22	10	3	36 (39)
MKS-06 (-F)	5,500	60	500 (0)	120 (115)	260 × 260	200 × 200	22	10	3	41 (43)
MKS-07 (-F)	6,000	60	800 (0)	128 (120)	260 × 260	200 × 200	22	10	4	64 (62)
MKS-08 (-F)	7,000	60	800 (0)	138 (130)	260 × 260	200 × 200	22	10	4	77 (75)
MKS-09 (-F)	8,000	60	800 (0)	148 (140)	300 × 300	220 × 220	25	15	4	91 (95)
MKS-10 (-F)	9,000	60	800 (0)	158 (150)	300 × 300	220 × 220	25	15	4	107 (110)
MKS-11 (-F)	10,000	60	800 (0)	168 (160)	300 × 300	220 × 220	25	15	4	123 (126)
MKI-01 (-F)	3,500	60	800 (0)	114.3 (=)	240	186	21	15	3,4	35.9 (32.8)
MKI-02 (-F)	4,000	60	800 (0)	114.3 (=)	240	186	21	15	3,6	42.1 (41.2)
MKI-03 (-F)	4,500	60	800 (0)	114.3 (=)	240	186	21	15	3,6	46.1 (45.5)
MKI-04 (-F)	5,000	60	800 (0)	114.3 (=)	240	186	21	15	3,6	50.2 (49.9)
MKI-05 (-F)	5,500	60	800 (0)	114.3 (=)	240	186	21	15	3,6	54.3 (54.2)
MKI-06 (-F)	6,000	60	800 (0)	114.3 (=)	240	186	21	15	3,6	58.3 (58.6)
MKI-07 (-F)	7,000	76	1,000 (0)	152.4 (=)	325	272	21	15	4,0	99.5 (93.1)
MKI-08 (-F)	8,000	76	1,000 (0)	152.4 (=)	325	272	21	15	4,0	111 (104.9)
MKI-09 (-F)	9,000	76	1,200 (0)	168.3 (=)	325	272	21	15	4,0	135 (123.7)
MKI-10 (-F)	10,000	76	1,200 (0)	168.3 (=)	325	272	21	15	4,0	147.5 (136.4)

316 317 ewo.com 1st edition, October 2023; Copyright: © ewo srl/GmbH



LARGE AREA LIGHTING

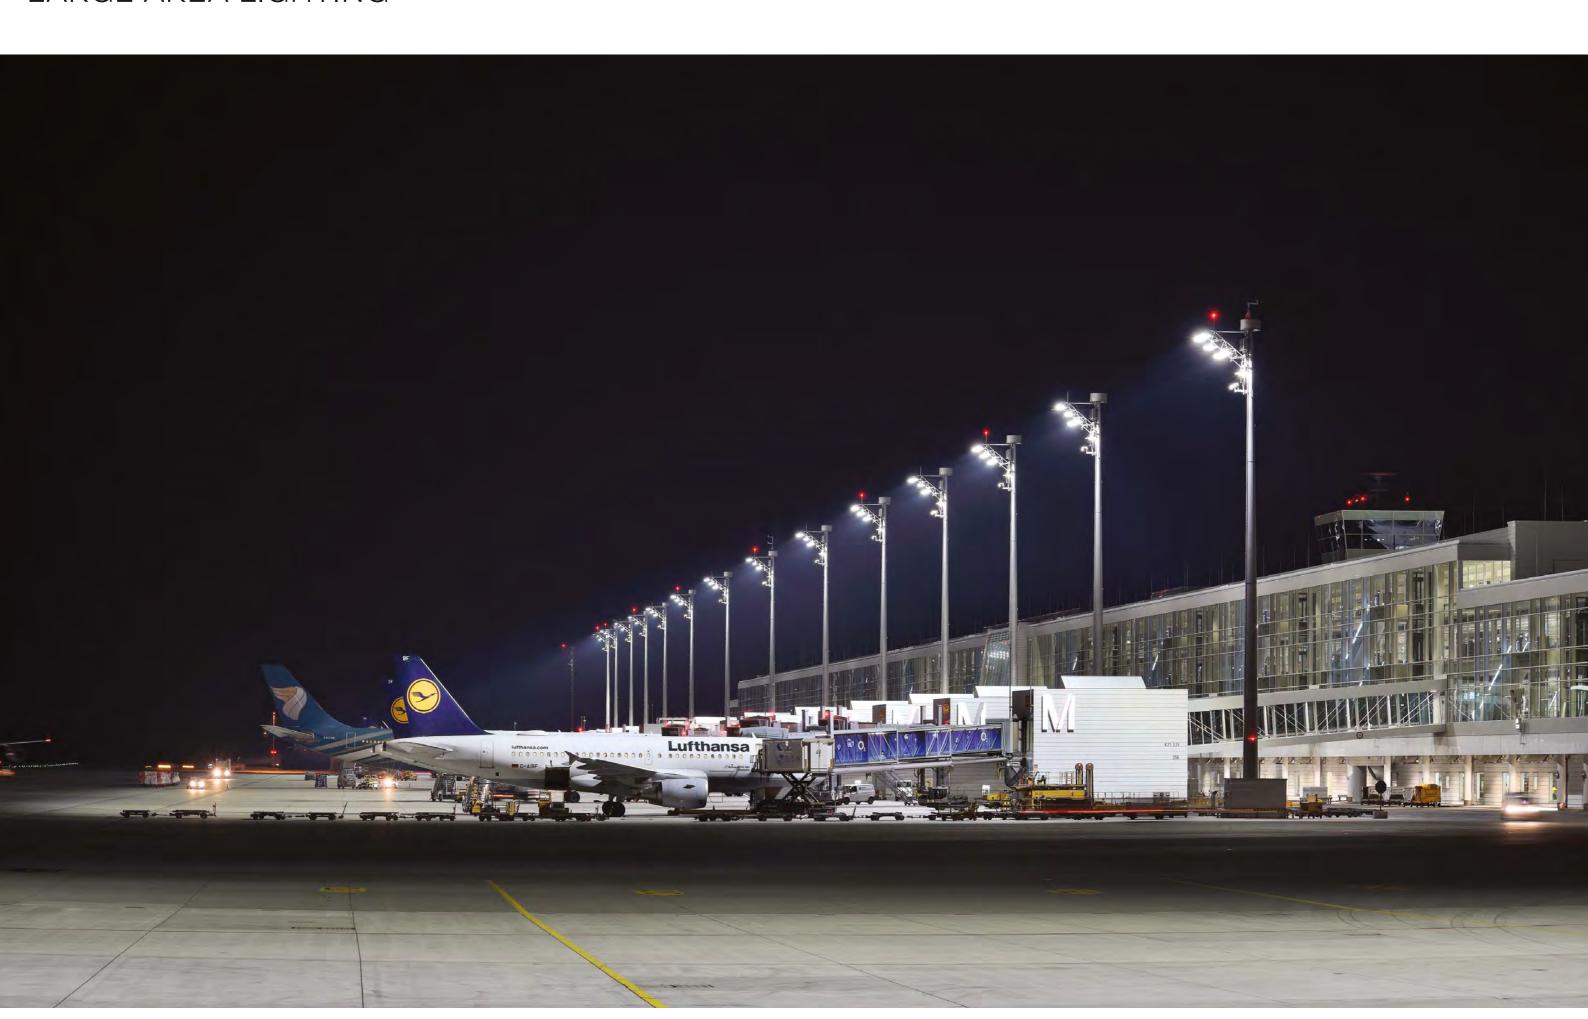







R-System gen4

A new generation

The R1, R2 and R4 luminaires of the R–System have undergone a thorough update. Stronger current and more light now replace the 3rd generation floodlights. Rectangular or round, with mounted or loose driver, with A–Series or E–Series lenses. Reduced stray light and optics that adapt to the market and application needs. This update has power in it!

<u>ewo.com</u>







BODY OF LIGHT

LIGITI

SHAPE OF LIGHT


:::.


R-System gen4







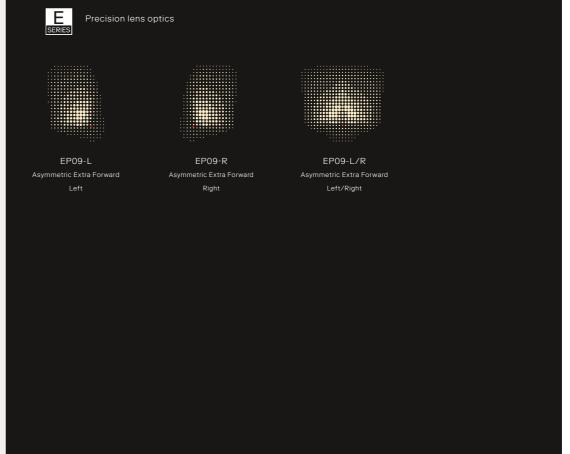




Programming options

Stand-alone
CLO Constant Lumen Output

A-Series





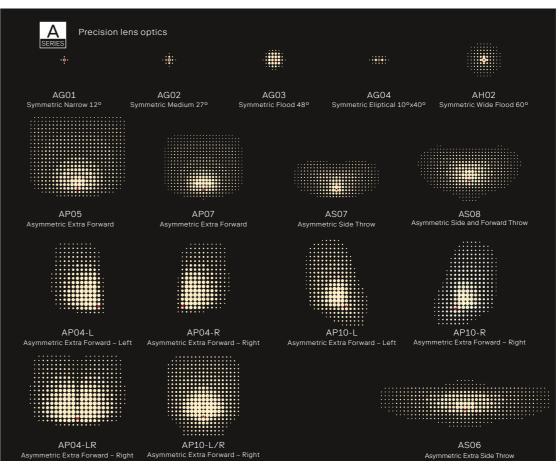



Control protocols

ON/OFF	ON
1–10 V	1-10V
DALI 2	DALI
Zhaga Book 18	Z
Line Switch	L/S
DMX-RDM	DMX


Programming options

Stand-	alone	Э	
α			

CLO Constant Lumen Output

:::.

R-System gen4



Airports, Harbor Logistics centers Sports facilities





R1 with driver installed



R1 with driver remote

Configurator







Housing

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Stainless steel mounting bracket
	Housing material Housing finish Glass Mounting options Fixing

Measurements

Model	↓ ૄ ①	→ [~ ②	Weight [kg]
R1 round	0.03	0.1	8.3
R1 round + Driver	0.057	0.1	12.0
	 Projected win 	ndage area [m	2]
	② Lateral winda	age area [m²]	

Power max. [W]


Electrical	A-Series	
Protection class	I	
Voltage [V], [Hz]	220-480, 50 /60	
Current max. [mA]	PMMA: 800 mA. PC: 1,100 mA	
Power max. [W]	440	

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
•	

Driver

2	
Control Options	ON OFF DALI
Programming	Stand-alone
	Constant Lumen Output (CLO)
Control accessories	Further accessories on request

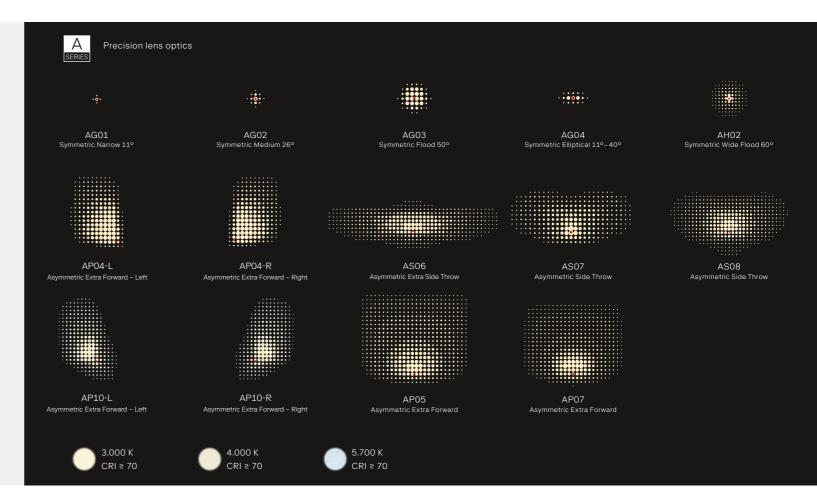

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP04-L	AP04-R	AP04-L/R	AP10-L	AP10-R	AP10-L/R
Beam angle	11°	26°	50°	11°-40°	60°	-	-	-	-	-	-
Distribution	AP05	AP07	AS06	AS07	AS08						
Beam angle	-	-	-	-	-						
MacAdam ellipses (SDCM)	≤ 5										
Nr. of LEDs	128										
Lum. flux max. [lm] (4,000 K)	60.600	•	•••••				•••••		·····	•••••	•••••••

::::.

INTELLIGENCE OF LIGHT

R-System gen4

R1 128 LED (A-Series)

Airports, Harbor Logistics centers Sports facilities



















Configurator











Housing

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Stainless steel mounting bracket
•••••	

Measurements

Model	Tilt	↓ ૄ ①	→ [° ②	Weight [kg] ③
R1 + Driver	0°	0.11	0.03	11.0
R1 + FCO	20°	0.19	0.04	12.4
		 Projected 	l windage area [[m²]

3 Weight with bracket and driver (driver 3.4 kg)

Electrical

A-Series

Protection class	I	
Voltage [V], [Hz]	220-415, 50/60	
Current max. [mA]	PMMA: 1,000 mA, PC: 1,300 mA	
Power max. [W]	512	
	•••••••••••••••••••••••••••••••••••••••	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options

Driver

2	
Control Options	OF DALI DMX
Programming	Stand-alone
	Constant Lumen Output (CLO)
Control accessories	Further accessories on request

Precision lens optics AP04-L AP04-R AP10-L AP10-R AP07 nmetric Extra Forward AP05 4,000 K* 5,700 K*

Performance

Distribution	AG01	AG02	AG03	AG04	AH02	AP04-L	AP04-R	AP04-L/R	AP10-L	AP10-R	AP10-L/R
Beam angle	11°	26°	50°	10°x40°	60°	-	-	-	-	-	-
Full Cut Off (Tilt)	=	-	-	-	-	20°	20°	20°	7°	7°	7°
Distribution	AP05	AP07	AS06	AS07	AS08						
Beam angle	-	-	-	-	-						
Full Cut Off (Tilt)	7°	-	-	-	-						
MacAdam ellipses (SDCM)	≤ 5										
Nr. of LEDs	128										
Lum. flux max. [lm] (5,700 K)	73,000										

Accessories






Bird Spike Full-Cut-Off visor Multipurpose bracket

:::.

<u>....</u>



R-System gen4

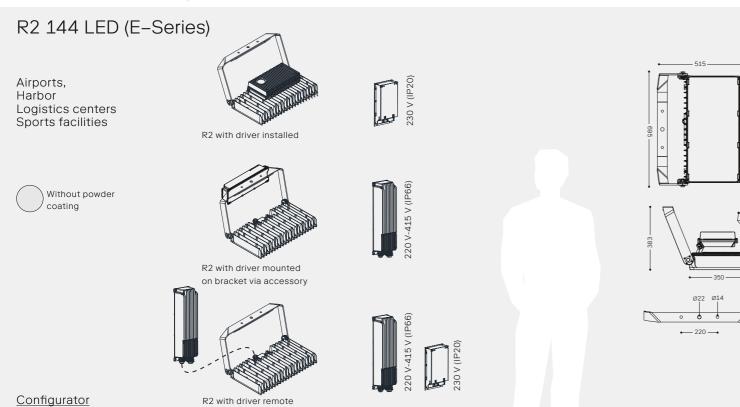

Housing

IP66 RoHS IK10

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Mounting bracket made of hot-dip galvanised steel
Fixing	Mounting bracket made of hot-dip galvanised steel

CE (DIN 18032-3

Measurements

Model	Tilt	1 1	→ ^ ②	Weight [kg] 3
R2	0°	0.27	0.09	22.0
R2 + Driver installed	00	0.27	0.13	28.5
R2 + Driver on bracket	0°	0.27	0.18	30.0
R2 + Driver on bracket + FCO	6°	0.34	0.18	31.5
	•••••	① Projected win	dage area [m²	1

② Lateral windage area [m²]


3 Weight with bracket M

Electrical	E-Series	
Protection class	I	
Voltage [V], [Hz]	220-415, 50/60	
Current max. [mA]	1,850	
Power max. [W]	790	

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
•	

Driver		On request
Control Options	ON OFF DALI 1-10V DMX	Z
Programming	Stand-alone	
	Constant Lumen Output (CLO)	
Control accessories	Further accessories on request	

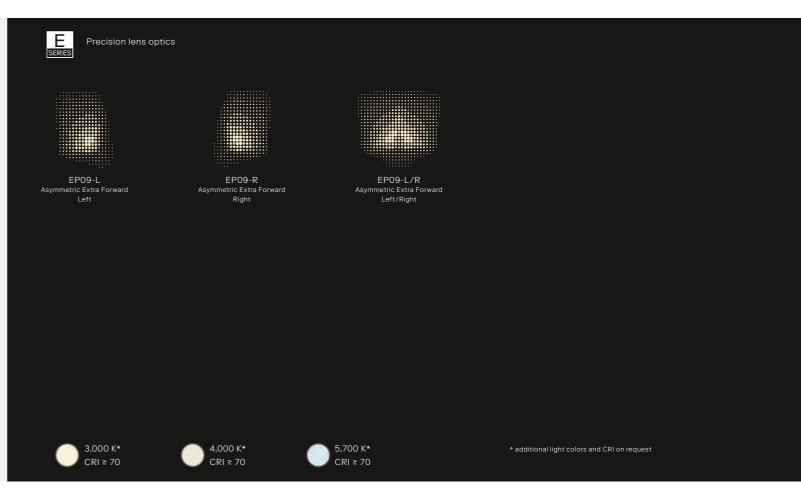

Performance

Distribution	EP09-L	EP09-R	EP09-L/R	
Beam angle	-	-	-	
Full Cut Off (Tilt)	6°	6°	6°	

MacAdam ellipses (SDCM)	≤ 5			
MacAdam ellipses (SDCM) Nr. of LEDs	144			

Accessories











Bird Spike


Full-Cut-Off visor

Backlight shield

Laser Pointer RedDot

:::.

R-System gen4

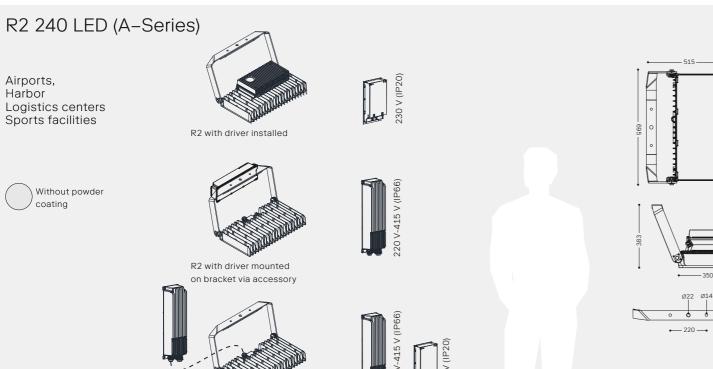

Housing

IP66 RoHS IK10

Configurator

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Mounting bracket made of hot-dip galvanised steel

CE (DIN 18032-3

R2 with driver remote

Measurements

Model	Tilt	1 (1)	→ ^ 2	Weight [kg] ③
R2	0°	0.27	0.09	22.0
R2 + Driver installed	00	0.27	0.13	28.5
R2 + Driver on bracket	00	0.27	0.18	30.0
R2 + Driver on bracket + FCO	10°	0.34	0.19	31.5
	•	① Projected win	dage area [m²]

② Lateral windage area [m²]


3 Weight with bracket M

Electrical	A-Series	
Protection class	I	
Voltage [V], [Hz]	220-415, 50/60	
Current max. [mA]	1,200	
Power max. [W]	870	

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
•	

Driver		On request
Control Options	ON DALI 1-10V DMX	Z
Programming	Stand-alone	
	Constant Lumen Output (CLO)	
Control accessories	Further accessories on request	

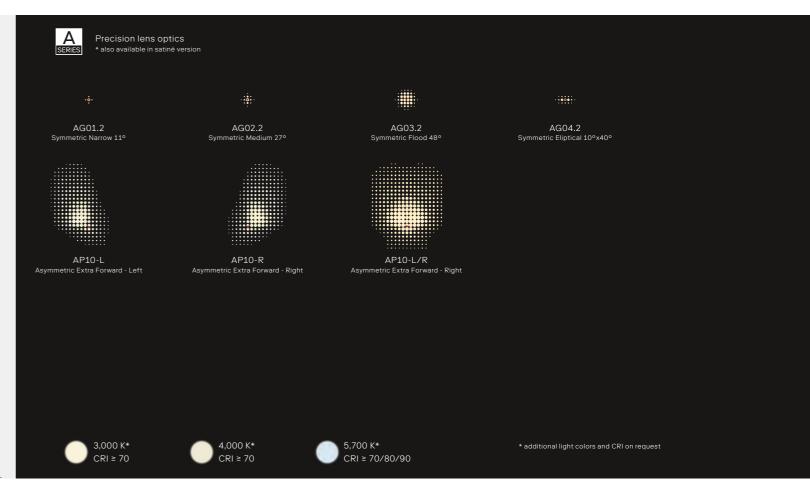

Performance

Distribution	AG01	AG02	AG03	AG04	AP10-L	AP10-R	AP10-L/R
Beam angle	11°	26°	50°	10°x40°	-	-	-
Full Cut Off (Tilt)	=	-	=	=	10°	10°	10°
			*			*	

MacAdam ellipses (SDCM)	≤ 5	
Nr. of LEDs	240	
Lum. flux max. [Im] (5,700 K)	125,100	

Accessories









Bird Spike Full-Cut-Off visor Lase

Laser Pointer

RedDot

Airports, Harbor

Logistics centers Sports facilities


Without powder coating

:::.


R-System gen4





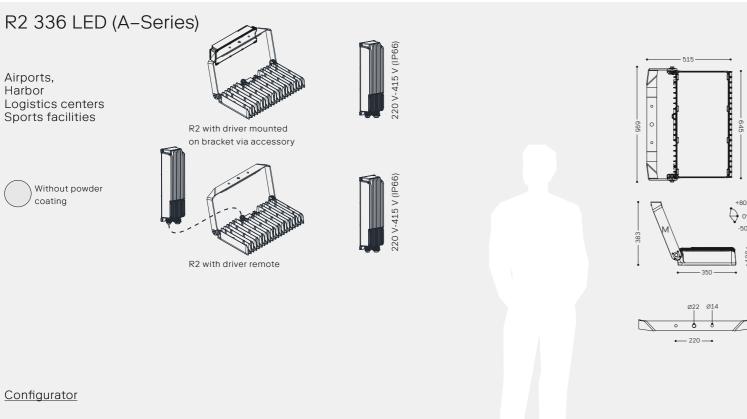



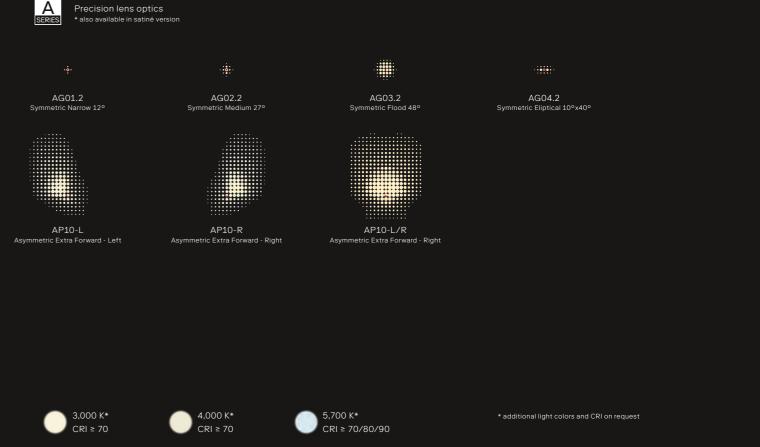

Housing

Configurator

IP66 RoHS IK10

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Mounting bracket made of hot-dip galvanised steel

(() DIN 18032-3

Measurements

Model	Tilt	1 (1)	→ ^ 2	Weight [kg] ③
R2	0°	0.27	0.09	22.0
R2 + Driver on bracket	0°	0.27	0.18	30.0
R2 + Driver on bracket + FCO	10°	0.34	0.19	31.5
		① Projected win	dage area [m²]

② Lateral windage area [m²] 3 Weight with bracket M

Electrical	A-Series	
Protection class	I	
Voltage [V], [Hz]	220-415. 50/60	
Current max. [mA]	1,200	
Power max. [W]	1,200	

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
•	

Driver		On request
Control Options	ON DALI 1-10V DMX	Ζ
Programming	Stand-alone	
	Constant Lumen Output (CLO)	
Control accessories	Further accessories on request	

Performance

Distribution	AG01	AG02	AG03	AG04	AP10-L	AP10-R	AP10-L/R
Beam angle	11°	26°	50°	10°x40°		-	-
Full Cut Off (Tilt)	=	=	=	-	10°	10°	10°

MacAdam ellipses (SDCM)	≤ 5	
Nr. of LEDs	336	
Lum. flux max. [lm] (5,700 K)	175,100	

Accessories










Bird Spike Full-Cut-Off visor Laser Pointer

RedDot

:::.

R-System gen4

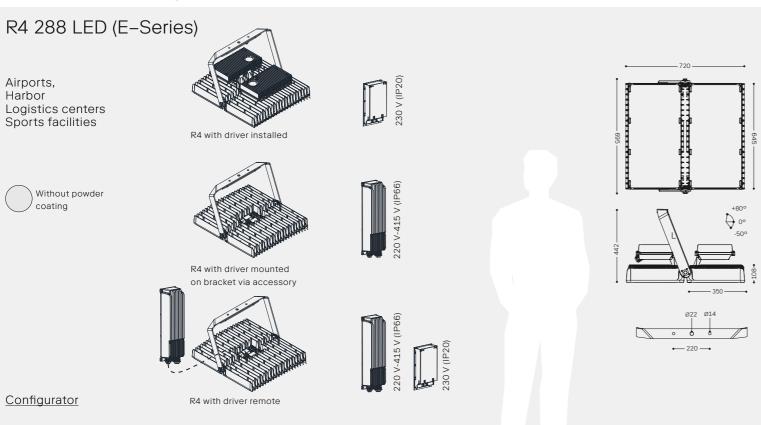

Housing Measurements

riousing	
Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Mounting bracket made of hot-dip galvanised steel

CE (DIN 18032-3

IP66 RoHS IK10

Model	Tilt	1 (1)	→ P ②	Weight [kg] ③
R4	0°	0.54	0.9	36.5
R4 + Driver installed	0°	0.54	0.13	50.0
R4 + Driver on bracket	00	0.54	0.18	44.5
R4 + Driver on bracket + FCO	6°	0.56	0.18	47.5


Projected windage area [m²]
 Lateral windage area [m²]
 Weight with bracket L

Electrical	E-Series	
Protection class	I	
Voltage [V], [Hz]	220-415, 50/60	
Current max. [mA]	1,850	
Power max. [W]	1,580	

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
•••••	-

Driver		On request	
Control Options	ON DALI 1-10V DMX	Z	
Programming	Stand-alone	•	
	Constant Lumen Output (CLO)		
Control accessories	Further accessories on request		

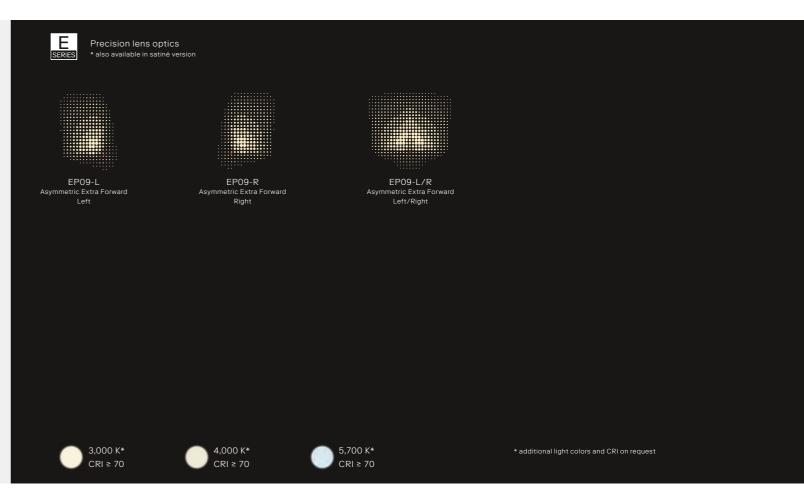

Performance

DISTIDUTION	EP09-L	EP09-R	EP09-L/R	
Beam angle	-	-	-	
Full Cut Off (Tilt)	6°	6°	6°	
	······	•		
MacAdam ellipses (SDCM)	≤ 5			
Nr. of LEDs	288			

Accessories









Bird Spike


Full-Cut-Off visor

Backlight shield

Laser Pointer RedDot

:::.

R-System gen4

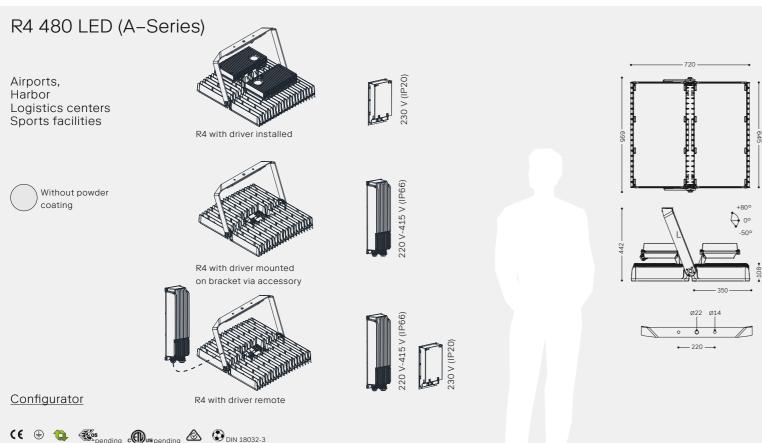

Housing

IP66 RoHS IK10

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	Mounting bracket made of hot-dip galvanised steel

Measurements

Model	Tilt	1 1	→ P ②	Weight [kg] 3
R4	0°	0.54	0.9	36.5
R4 + Driver installed	0°	0.54	0.13	50.0
R4 + Driver on bracket	0°	0.54	0.18	44.5
R4 + Driver on bracket + FCO	10°	0.56	0.18	47.5

① Projected windage area [m²]② Lateral windage area [m²]


3 Weight with bracket L

Electrical	A-Series	
Protection class	I	
Voltage [V], [Hz]	220-415, 50/60	
Current max. [mA]	1,200	
Power max. [W]	1,740	

Operating conditions

Lifetime	Visit the <u>configurator</u> for specific lifetime options
•	

Driver	(On request
Control Options	ON DALI 1-10V DMX	Z
Programming	Stand-alone	
	Constant Lumen Output (CLO)	
Control accessories	Further accessories on request	

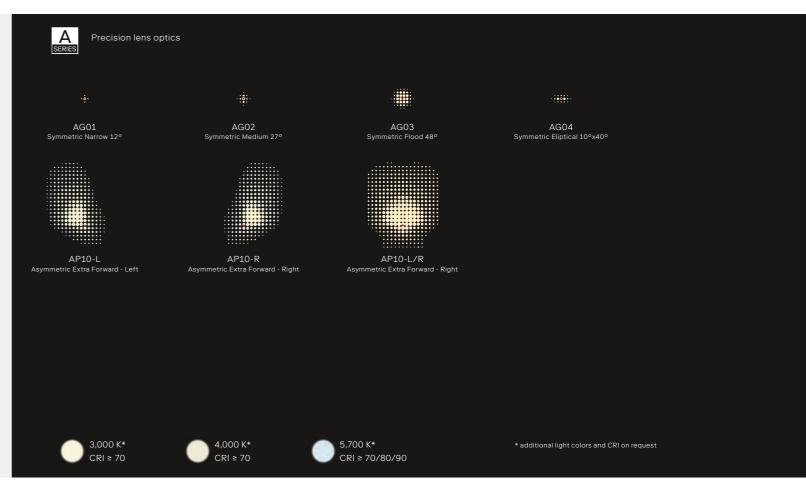

Performance

		AG02	AG03	AG04	AP10-L	AP10-R	AP10-L/R	
Beam angle	11°	26°	50°	10°x40°	60°	-	-	
Full Cut Off (Tilt)	-	=	-	-	10°	10°	10°	

MacAdam ellipses (SDCM)	≤ 5	
Nr. of LEDs	480	
Lum. flux max. [lm] (5,700 K)	250,200	

Accessories









Bird Spike Full-Cut-Off visor

Laser Pointer

RedDot




B: on bracket R: remote

21101111	ance tab	ie				Values 5,7	00 K							R: remote I : installed
odel	LED	Lens	Material	I min [mA]	I max [mA]	Flux min [lm]	Flux max [lm]	Power min [W]	Power max [W]	Eff. max [I/W]	Eff. min [I/W]	Driver input voltage range	Driver IP rate	Driver mounting type
	128	AP1604-L	PMMA	500	1,000	29,900	54,000	198	398	151.3	135.7	220V-480V	66	I/R
	•••••	AP1604-R	PMMA	500	1,000	29,900	54,000	198	398	151.3	135.7	220V-480V	66	I/R
	••••••	AP1604-L/R	PMMA	500	1,000	29,900	54,000	198	398	151.3	135.7	220V-480V	66	I/R
		AP05	PMMA	500	1,000	29,800	53,800	198	398	150.8	135.2	220V-480V	66	I/R
	••••••	AP07	PMMA	500	1,000	28,800	52,000	198	398	145.8	130.7	220V-480V	66	I/R
	•••••••••••	AH02	PMMA	500	1,000	31,000	56.100	198	398	157.0	140,8	220V-480V	66	I/R
	••••••	AS06	PMMA	500	1,000	28,700	51.900	198	398	145.2	130.2	220V-480V	66	I/R
	••••••••••	AS07	PMMA	500	1,000	30,000	54,300	198	398	152.0	136.3	220V-480V	66	I/R
	••••••	AS08	PMMA	500	1,000	29,400	53,200	198	398	148.9	133.5	220V-480V	66	I/R
	••••••	AG01.2	PC	500	1,300	33,100	73,000	198	519	167.1	140.7	220V-480V	66	I/R
	••••••	AG02.2	PC	500	1,300	31,100	68,700	198	519	157.2	132.3	220V-480V	66	I/R
	••••••	AG03.2	PC	500	1,300	28,500	62,900	198	519	144.0	121.2	220V-480V	66	I/R
	•••••••	AG04.2-H	PC	500	1,300	32,000	70,700	198	519	161.8	136.2	220V-480V	66	I/R
	············	AG04.2-V	PC	500	1,300	32,000	70,700	198	519	161.8	136.2	220V-480V	66	I/R
	•••••••	AP10-L	PC	500	1,300	29,600	65,400	198	519	149.8	126.1	220V-480V	66	I/R
	•••••	AP10-R	PC	500	1,300	29,600	65,400	198	519	149.8	126.1	220V-480V	66	I/R
	••••••••••	AP10-L/R	PC	500	1,300	29,600	65,400	198	519	149.8	126.1	220V-480V	66	I/R
	144	EP09-L	PMMA	400	1,850	28,400	99,500	173	790	172.4	129.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
		EP09-R	PMMA	400	1,850	28,500	99,500	173	790	172.4	129.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	•••••	EP09-L/R	PMMA	400	1,850	28,500	99,500	173	790	172.4	129.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	240	AG01.2	PC	500	1,200	61,600	125,100	350	870	175.9	144.0	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	••••••••••	AG02.2	PC	500	1,200	57,900	117,700	350	870	165.5	135.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	······································	AG03.2	PC	500	1,200	53,000	107,800	350	870	151.6	124.1	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	•••••••	AG04.2-H	PC	500	1,200	59,600	121,100	350	870	170.4	139.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	······································	AG04.2-V	PC	500	1,200	59,600	121,100	350	870	170.4	139.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	••••••••••	AP10-L	PC	500	1,200	56,100	113,900	350	870	153.3	128,2	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	······································	AP10-R	PC	500	1,200	56,100	113,900	350	870	153.3	128,2	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	••••••••	AP10-L/R	PC	500	1,200	55,000	111,700	350	870	150.3	125,6	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	336	AG01.2	PC	500	1,200	86,200	175,100	490	1,200	175.9	144.0	220V-415V	66	R, B
		AG02.2	PC	500	1,200	81,100	164,700	490	1,200	165.5	135.5	220V-415V	66	R, B
		AG03.2	PC	500	1,200	74,200	150,800	490	1,200	151.6	124.1	220V-415V	66	R, B
		AG04.2-H	PC	500	1,200	83,400	169.500	490	1,200	170.4	139.5	220V-415V	66	R, B
		AG04.2-V	PC	500	1,200	83,400	169.500	490	1,200	170.4	139.5	220V-415V	66	R, B
		AP10-L	PC	500	1,200	78,500	159,500	490	1,200	153.3	128,2	220V-415V	66	R, B
	••••••	AP10-R	PC	500	1,200	78,500	159,500	490	1,200	153.3	128,2	220V-415V	66	R, B
		AP10-L/R	PC	500	1,200	77,000	156,500	490	1,200	150.3	125,6	220V-415V	66	R, B
	288	EP09-L	PMMA	800	1,850	105,800	199,000	684	1,580	162.2	129.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
		EP09-R	PMMA	800	1,850	105,800	199,000	684	1,580	162.2	129.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	······	EP09-L/R	PMMA	800	1,850	105,800	199,000	684	1,580	162.2	129.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	480	AG01.2	PC	500	1,200	123,100	250,200	700	1,740	175.9	144.0	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
		AG02.2	PC	500	1,200	115,800	235,300	700	1,740	165.5	135.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	······	AG03.2	PC	500	1,200	106,100	215,500	700	1,740	151.6	124.1	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	······································	AG04.2-H	PC	500	1,200	119,200	242,200	700	1,740	170.4	139.5	220V-240V / 220V-415V	20 / 66	I. R. B / R. B
	············	AG04.2-V	PC	500	1,200	119,200	242,200	700	1,740	170.4	139.5	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
	·············	AP10-L	PC	500	1,200	112,200	227,900	700	1,740	153.3	128.2	220V-240V / 220V-415V	20 / 66	I. R. B / R. B
		AP10-R	PC	500	1,200	112,200	227,900	700	1,740	153.3	128.2	220V-240V / 220V-415V	20 / 66	I, R, B / R, B
		AP10-L/R	PC	500	1,200	110,000	223,500	700	1,740	150.3	125.6	220V-240V / 220V-415V	20 / 66	I, R, B / R, B



RIVAL

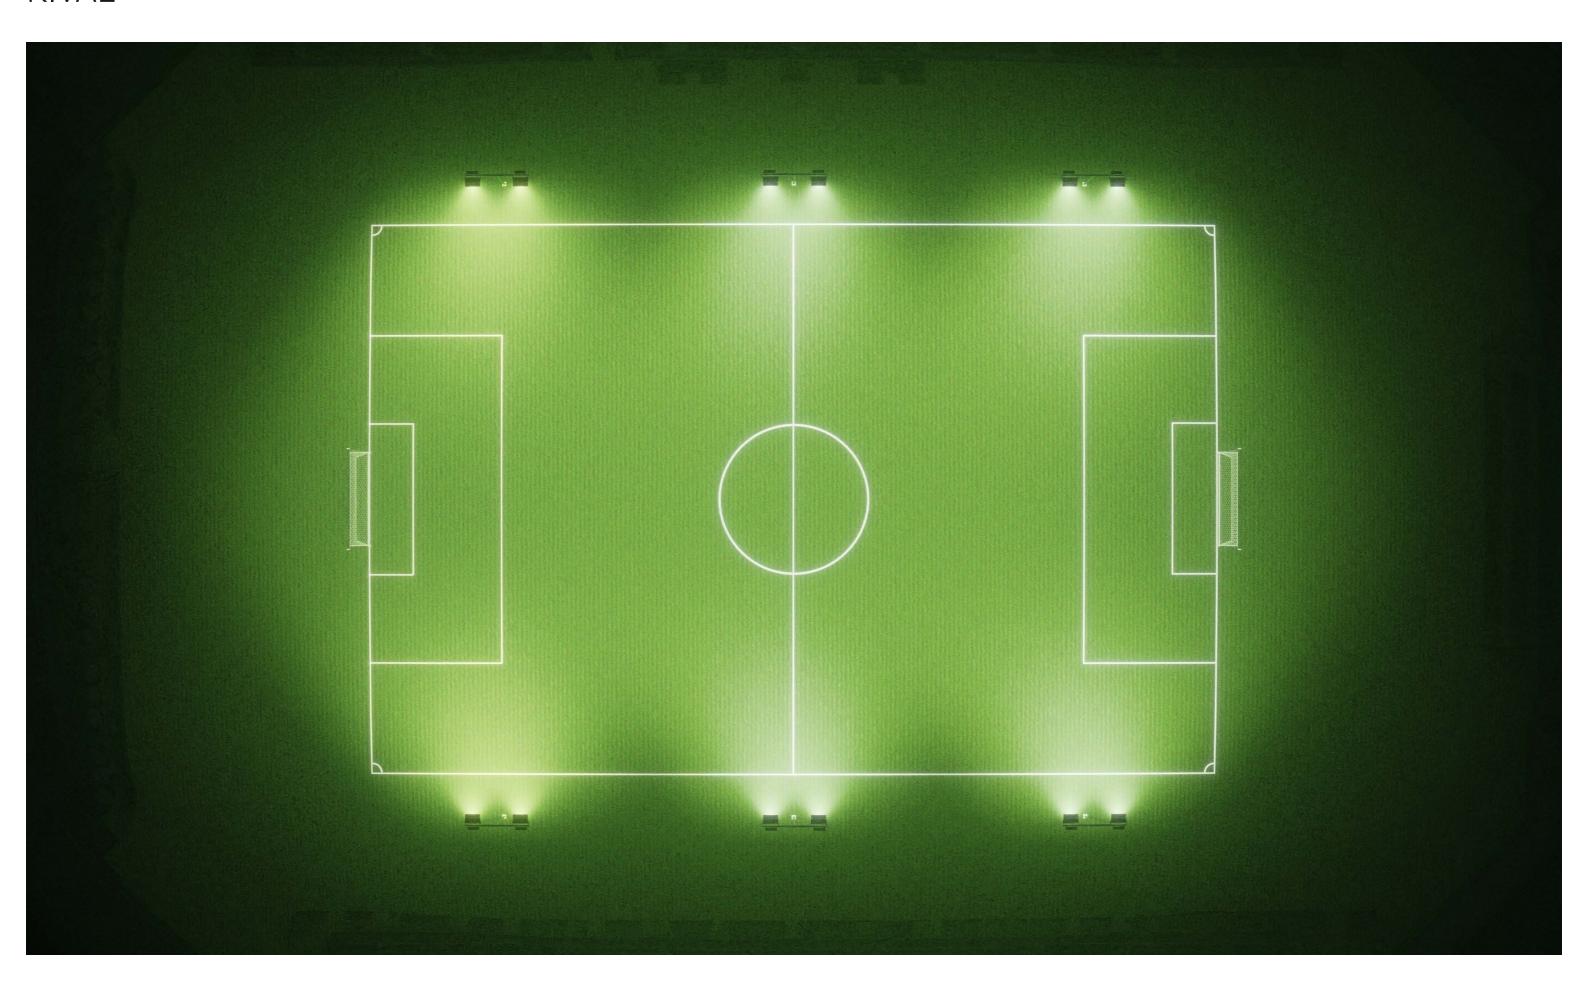

342 343







RIVAL

ready to compete

RIVAL puts indoor and outdoor sports fields in the right light. The floodlight is corrosion resistant and can therefore, in its uncoated form, be used in all climatic environments. It is available in two tilt options, and a factory installed FCO shield also minimizes glare and prevents light from spilling upward. With A–Series lenses and five different light distributions, RIVAL easily outshines its competition.

<u>ewo.com</u>



RIVAL



Housing

Electrical

Protection class Voltage [V], [Hz]

Current max. [mA]

LED power [W]

Current min. DALI [mA]

Housing material	Aluminum die-cast
Housing finish	without Polyester powder coating
	(ewoECP only with powder coating upon request*)
Finish colour	colours on request
Glass	EGS safety glass
Mounting options	Wall - Over and under cross arms
Fixing	with bracket
	* owe three stone process /high quality allow are treatment primary to

^{*} ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

A-Series

220-415, 50/60

1,200

20

1,157


Measurements

Model	1 1	→ ②	Weight [kg] 3		
RIVAL (FCO 10°)	0.38	0.2	29.0		
RIVAL (FCO 30°)	0.39	0.22	30.0		
•••••	① Projected windage area [m²] (Tilt 0°)				
② Lateral windage area [m²] (Tilt 0°)					
Weight with bracket, Full-Cut-Off and driver (driver 7.0 kg)					

Operating conditions

Lifetime	at 25°C
L70B10 projected	100,000 h (1,200 mA)
L80B10 projected	100,000 h (1,100 mA)
L90B10 projected	28,000 h (1,100 mA)

Driver (external)	upon request
Control Options ON OFF DALI 1-10V DMX-RDM	Z
Programming	Stand-alone
	Constant Lumen Output (CLO)
Control accessories Further accessories on request	

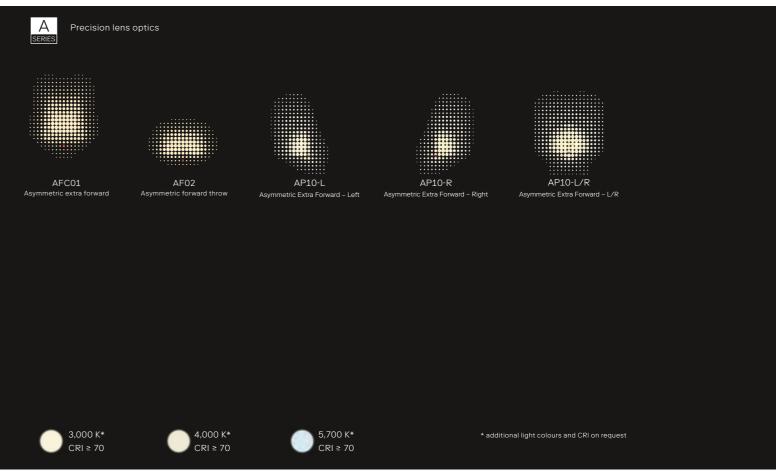


Performance

Distribution	AFC01	AF02	AP10-L	AP10-R	AP10-L/R
Beam angle	55°	44°	65°	65°	65°
Full Cut Off (adjustable ±5°)	30°	30°	10°	10°	10°

MacAdam ellipses (SDCM)	≤ 5 SDCM	
Nr. of LEDs	320	
Luminous flux [lm] (4,000 K)	146,600	
Lum, efficiency up to (Im/W)	161	

Accessories

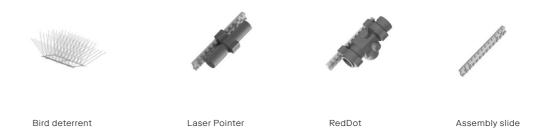

<u>ewo.com</u> 1st edition, October 2023; Copyright: © ewo srl/GmbH



Cortaccia in the Bolzano area, Headquarters

South Tyrol, Italy

Offices Austria, Germany and Italy

plus an extensive network of international partners

Number of Employees > 100

Hannes Wohlgemuth

We know that special lighting projects require close interaction. That is why personal contact with you is the key to our corporate philosophy.

Call us today - our team of experts will be happy to advise you.

Would you like to stay up to date on what's new at our end? For all the latest updates, visit our website and follow us on social media: ewo.com

ewo srl/GmbH Via dell'Adige/Etschweg 15 IT-39040 Cortaccia/Kurtatsch BZ Facebook (ewo.lighting)

+39 0471 623 087 mail@ewo.com ewo.com

Instagram (ewolighting) LinkedIn (ewo srl/GmbH) YouTube (ewo)

ewo Deutschland GmbH Gotzinger Straße 8 DE-81371 München +49 (0)89 5203 0729 germany@ewo.com

ewo Austria GmbH Grabenweg 3 AT-6020 Innsbruck +43 (0)650 3064 799 austria@ewo.com

ewo USA, LLC 725 Southbridge St. - Door 10 Worcester MA 01610 +1 (412) 897-6897 usa@ewo.com

ewo France SAS Cardinal Workside 60 Quai Perrache - CS 30333 69285 Lyon Cedex 02 (FR) +33 (0) 6 75 35 86 74 france@ewo.com

Errors and omissions excepted. Subject to change.

1st edition, October 2023 Copyright: ©ewo srl/GmbH

Concept/Design: Designbuero Josef Grillmeier

Project Lead: Anabel Nächt

